

Precision, Quad, SPDT, CMOS Analog Switch

ABSOLUTE MAXIMUM RATINGS

V+ to V-	44V
V _{IN} , V _{COM} , V _{NO} , V _{NC}	V- to V+ (V _{NO} - V _{NC})
	32V
V+ to Ground	30V
V- to Ground	-30V
Current, Any Terminal Except V _{COM} , V _{NO} , or V _{NC}	30mA
Continuous Current, V _{COM} , V _{NO} , or V _{NC}	20mA
Peak Current, V _{COM} , V _{NO} , or V _{NC} (Pulsed at 1ms, 10% duty cycle max)	70mA
ESD	2000V

Note 1: Device mounted with all leads soldered to PC board.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS—Dual Supplies

(GND = 0V, V+ = +15V, V- = -15V, TA = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
POWER REQUIREMENTS						
Positive Supply Current	I ₊	V _{IN} = 0V/5V, V+ = 16.5V, V- = -16.5V	0.05	0.25		mA
Supply Voltage Range	V+/V-	Dual supply, V+ = V-	±4.5V	±20		V
	V+	Single supply, V- = GND	10	30		
Negative Supply Current	I ₋	V _{IN} = 0V/5V, V+ = 16.5V, V- = -16.5V	0.01	1		µA
LOGIC INPUT						
Input Voltage Low	V _{IL}		V-	0.8		V
Input Voltage High	V _{IH}		2.4	V+		V
Input Current	I _{IN}	V _{IN} = V-, V+	-1.0	0.0001	1.0	µA
SWITCH						
Analog Signal Range	V _{COM} , V _{NO} , V _{NC}		V-	V+		V
On Circuit Resistance	R _{ON}	V _{COM} = +10V, I _(NC or NO) = 1mA; V _{COM} = -10V, I _(NC or NO) = 1mA	M C, E	20 45		Ω
On Resistance Match Between Channels (Note 4)	R _{ON}	I _(NC or NO) = -10mA, V _D = 10V or -10V, V+ = 15V, V- = -15V	TA = +25°C	2		Ω
			TA = T _{MIN} to T _{MAX}	4		
On Resistance Flatness (Note 4)	R _{ON}	I _(NC or NO) = -10mA, V _D = 5V or -5V, V+ = 15V, V- = -15V	TA = +25°C	3		Ω
			TA = T _{MIN} to T _{MAX}	5		
On Circuit Leakage Current	I _{COM}	V _{COM} = ±15.5V, V _{NC} or V _{NO} = +15.5V, V+ = 16.5V, V- = -16.5V	M C, E	-0.75 -1.00	0.75 0.20	nA
Off Circuit Leakage Current	I _{NC} or I _{NO}	V _{COM} = ±15.5V V _{NC} or V _{NO} = +15.5V, V+ = 16.5V, V- = -16.5V	M C, E	-0.25 -0.50	0.01 0.02	nA
DYNAMIC						
Turn-Off Time	t _{OFF}	Figure 1		145		ns
Turn-On Time	t _{ON}			175		ns
Break-Before-Make Time	t _{OPEN}		10			ns
Off Capacitance	C _{OFF}			5		pF
On Capacitance	C _{ON}			5		pF
Charge Injection	Q	C _L = 10nF, V _{GEN} = 0V, R _{GEN} = 0Ω, Figure 6	TA = +25°C	2	10	pC
Off Isolation	OIRR	f = 1MHz, R _L = 75Ω, V _{COM} = 2.3VRMS		72		dB
Crosstalk	CCRR			78		dB

Precision, Quad, SPDT, CMOS Analog Switch

ELECTRICAL CHARACTERISTICS—DUAL SUPPLIES (continued)

(GND = 0V, V+ = +15V, V- = -15V, TA = TMIN to TMAX, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
LOGIC INPUT						
Input Voltage Low						
Input Voltage Low	V _{IL}		V-	0.8	0.8	V
Input Voltage High	V _{IH}		2.4	V+	V+	V
Input Current	I _{IN}	V _{IN} = V-, V+	-1.0	0.0001	1.0	μA
SWITCH						
Analog Signal Range	V _{COM}		V-	V+	V+	V
On Circuit Resistance	R _{ON}	V _{COM} = 10V, I _(NC or NO) = 1mA; V _{COM} = -10V, I _(NC or NO) = 1mA	C, E M	45 45	45	Ω
On Circuit Leakage Current	I _{COM}	V _{COM} = ±15V, V _{NC} or V _{NO} = -15V, V+ = 16.5V, V- = -16.5V	C, E M	-10 -60	10 60	nA
On Circuit Leakage Current	I _{NC} or I _{NO}	V _{COM} = ±15V, V _{NC} or V _{NO} = -15V, V+ = 16.5V, V- = -16.5V	C, E M	-6	6	nA

ELECTRICAL CHARACTERISTICS—Single Supply

(GND = 0V, V+ = +12V, V- = 0V, TA = +25°C, unless otherwise noted.)

PARAMETER	SYMBOL	CONDITIONS	MIN	TYP	MAX	UNITS
SUPPLY						
Supply Voltage Range	V ₊	Single supply, V- = GND	10	30	30	V
Positive Supply Current	I ₊			0.25	0.25	mA
INPUT						
Input Voltage Low	V _{INLO}		0	0.8	0.8	V
Input Voltage High	V _{INHI}		2.4	V+	V+	V
Input Current	I _{IN}	V _{IN} = V+, 0V		1	1	μA
SWITCH						
Analog Signal Range	V _{COM} , V _{NO} , V _{NC}		V-	V+	V+	V
On Circuit Resistance	r _{ON}	V _{COM} = 10V, I _(NC or NO) = 1mA, V _{COM} = 1V, I _(NC or NO) = 1mA		35	75	Ω
On Circuit Leakage Current	I _{COM}	V _{COM} = 11V, V _{NC} or V _{NO} = 0V V _{COM} = 1V, V _{NC} or V _{NO} = V+			0.75	nA
Off Circuit Leakage Current	I _{NC} or I _{NO}	V _{COM} = 11V V _{NC} or V _{NO} = 1V			0.25	nA
DYNAMIC						
Turn-Off Time	t _{OFF}	Figure 1	45		ns	
Turn-On Time	t _{ON}		90		ns	
Break-Before-Make Time	t _{OPEN}		5	10	10	ns
Off Isolation	O _{IRR}	f = 1MHz, R _L = 75Ω, V _{COM} = 2.3VRMS	70		70	dB
Crosstalk	C _{CCR}		72		72	dB

Note 2: The algebraic convention, whereby the most negative value is a minimum and the most positive is a maximum, is used in this data sheet.









Note 3: Typical values are for design aid only, not guaranteed or subject to production testing.

Note 4: On resistance match between channels and flatness are guaranteed only with bipolar-supply operation.

Precision, Quad, SPDT, CMOS Analog Switch

Typical Operating Characteristics

($T_A = +25^\circ\text{C}$, unless otherwise noted).

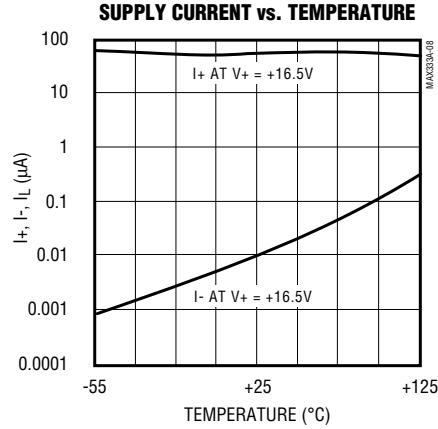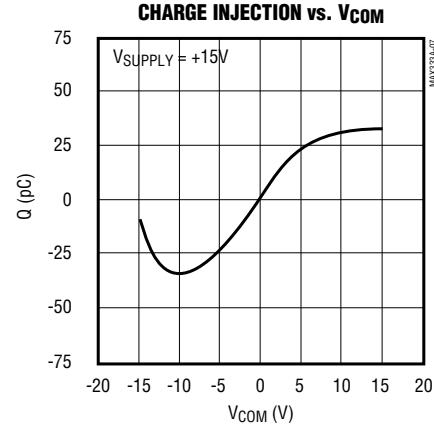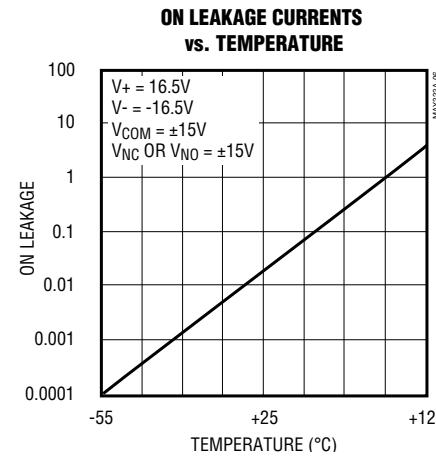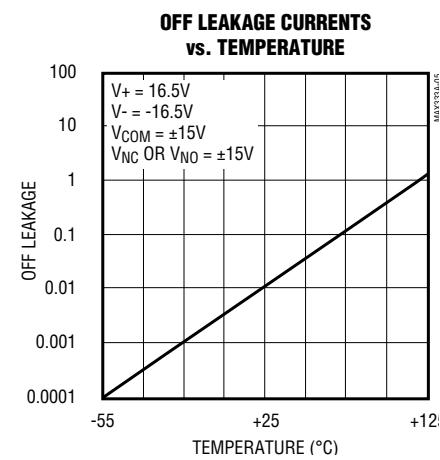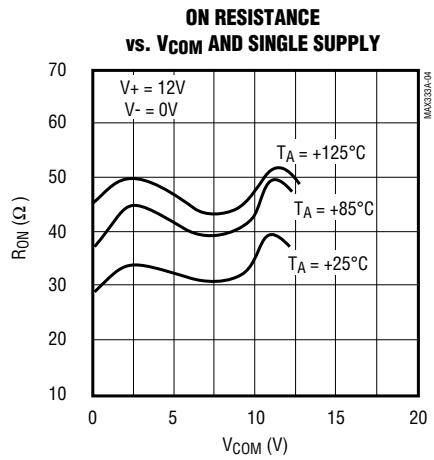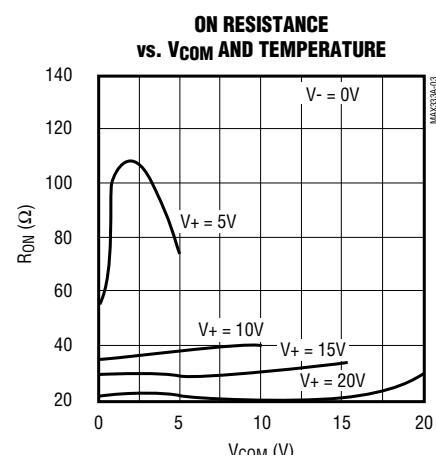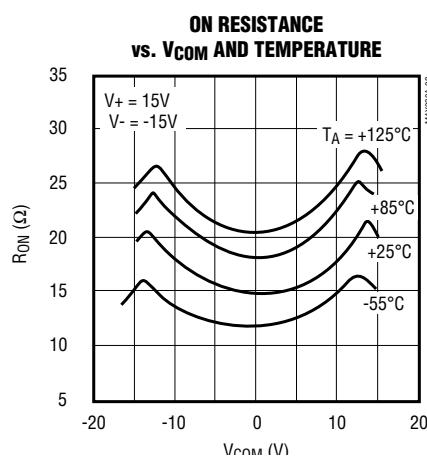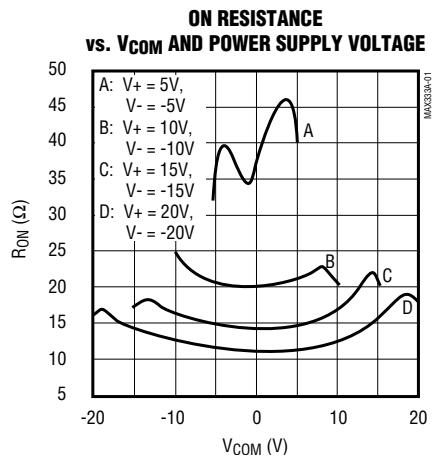

Precision, Quad, SPDT, CMOS Analog Switch

Pin Description

PIN	NAME	FUNCTION
1, 10, 11, 20	IN1-IN4	Logic-Level Inputs
2, 9, 12, 19	NO1-NO4	Normally Open Switches
3, 8, 13, 18	COM1-COM4	Common Switch Poles
4, 7, 14, 17	NC1-NC4	Normally Closed Switches
5	V-	Negative Power Supply
6	GND	Ground
15	N.C.	Not Internally Connected
16	V+	Positive Power Supply

Applications Information

Operation with Supply Voltages Other than $\pm 15V_o$

The main limitation of supply voltages other than $\pm 15V$ is a reduction in the analog signal range. The MAX333A operates with $\pm 5V$ to $\pm 20V$ bipolar supplies. The *Typical Operating Characteristics* and graphs show typical on resistance for $\pm 15V$, $\pm 10V$, ± 5 supplies. Switching times increase by a factor of two or more for $\pm 5V$ operation. The MAX333A can operate from $+10V$ to $+24V$ unipolar supplies. It can be powered from a single $+10V$ to $+24V$ supply, as well as from unbalanced supplies such as $+24V$ and $-5V$. Connect V- to 0V when operating with a single supply.

Overvoltage Protection

Proper power-supply sequencing is recommended for all CMOS devices. It is important not to exceed the absolute maximum ratings because stresses beyond the listed ratings may cause permanent damage to the devices. Always sequence V+ on first, followed by VL, V-, and logic inputs. If power-supply sequencing is not possible, add two small signal diodes in series with the supply pins (Figure 1). Adding the diodes reduces the analog signal range to 1V below V+ and 1V below V-, but low switch resistance and low leakage characteristics are unaffected.


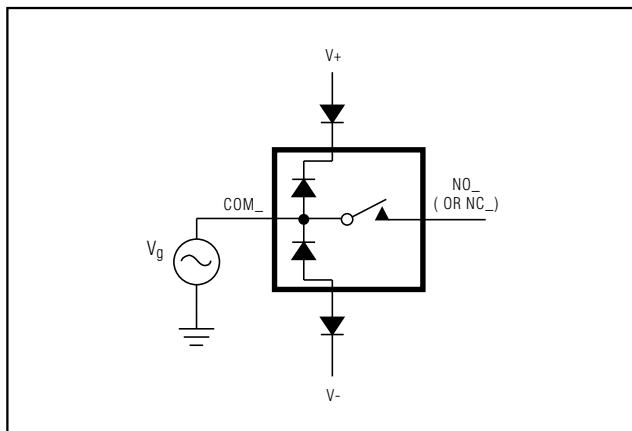


Figure 1. Overvoltage Protection Using Blocking Diodes

Test Circuits/Timing Diagrams

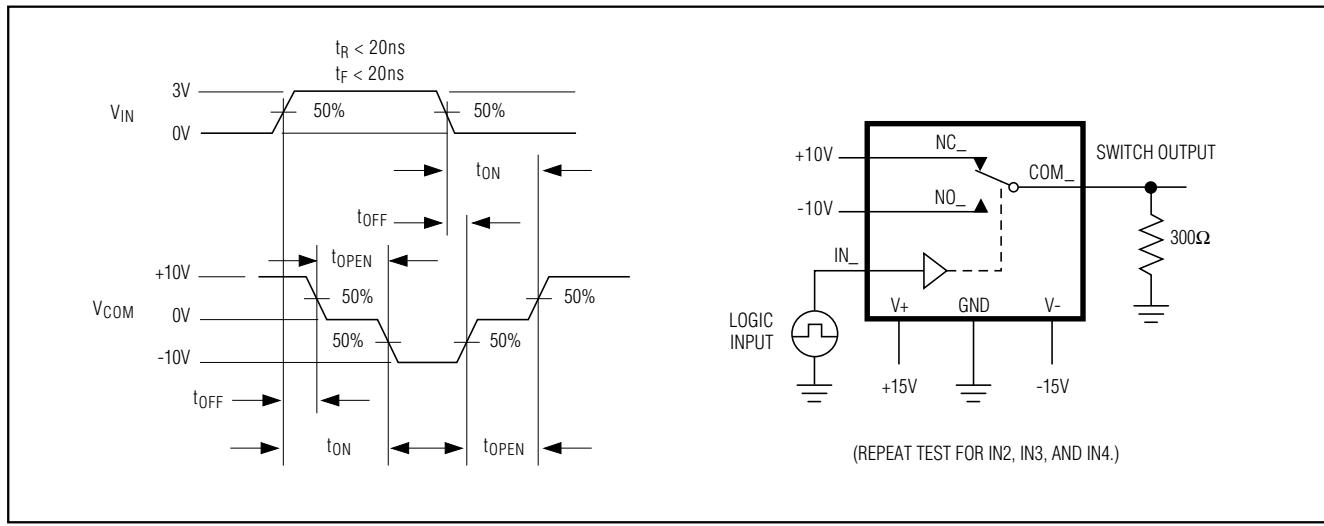

Precision, Quad, SPDT, CMOS Analog Switch

Test Circuits/Timing Diagrams

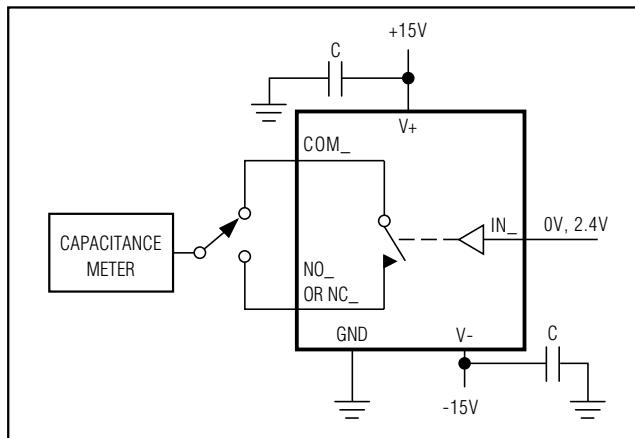


Figure 3. Channel-Off Capacitance

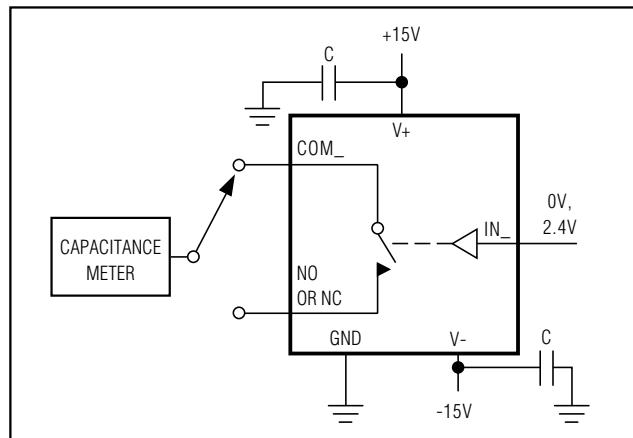


Figure 4. Channel-On Capacitance

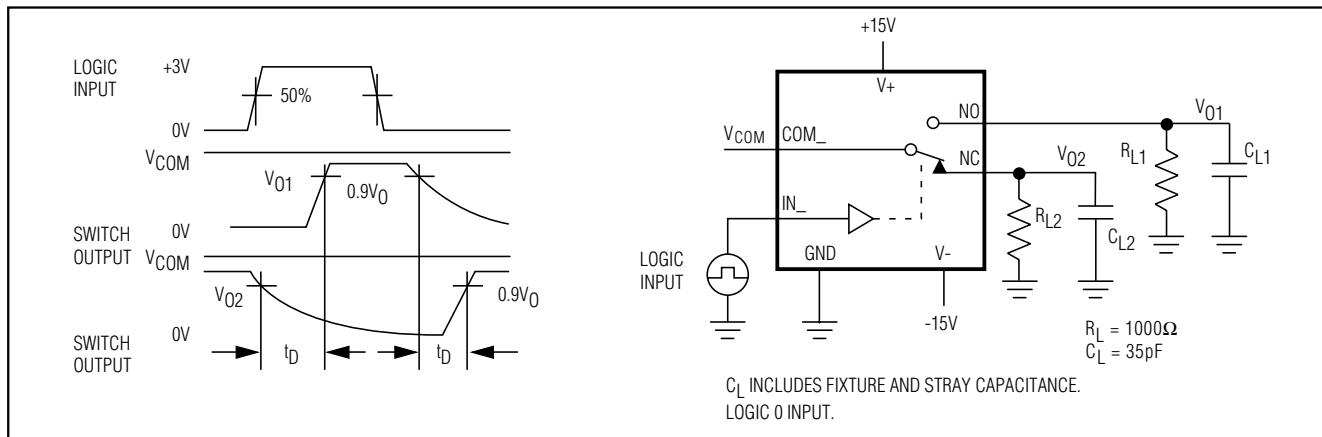


Figure 5. Break-Before-Make

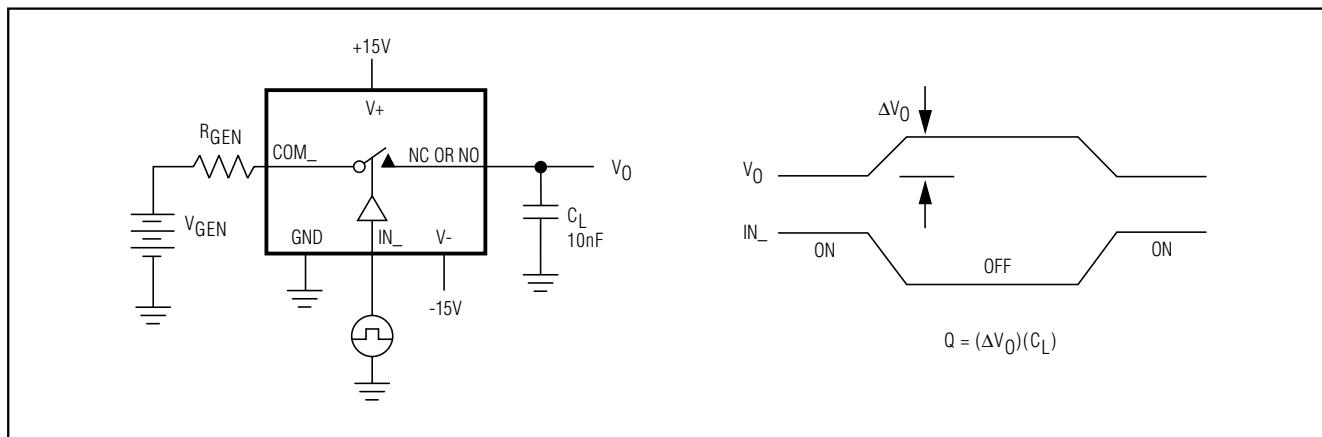


Figure 6. Charge Injection

Precision, Quad, SPDT, CMOS Analog Switch

Test Circuits/Timing Diagrams (continued)

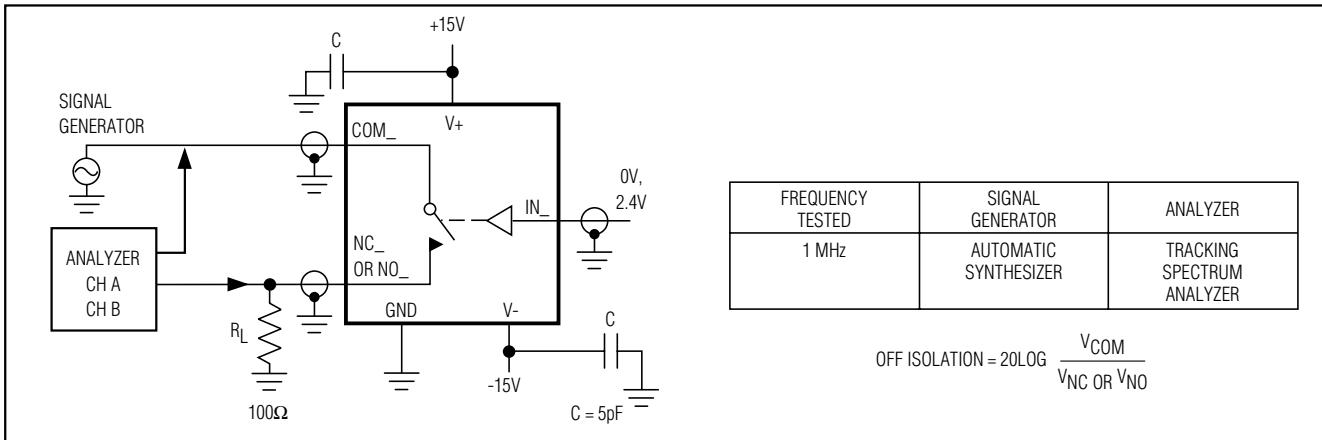


Figure 7. Off-Isolation


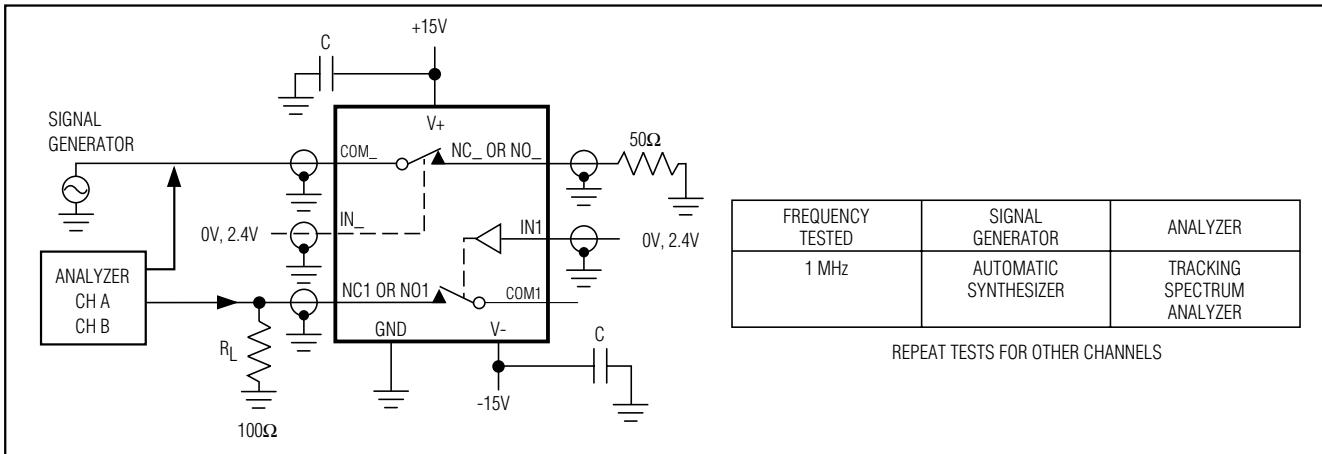


Figure 8. Crosstalk

Precision, Quad, SPDT, CMOS Analog Switch

Chip Topography

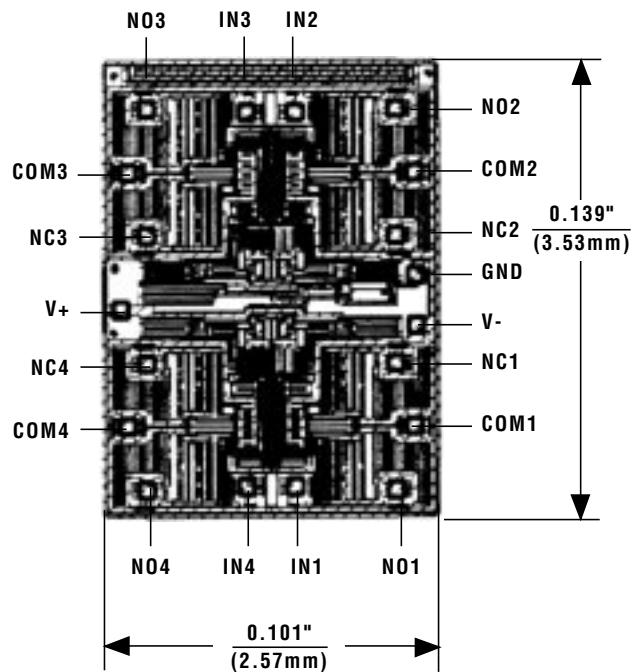

TRANSISTOR COUNT: 145;

SUBSTRATE CONNECTED TO V+.

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Maxim Integrated:

[MAX333ACAP+](#) [MAX333ACPP+](#) [MAX333ACUP+](#) [MAX333ACWP+](#) [MAX333AEUP+](#) [MAX333AEWP+](#)
[MAX333ACAP+T](#) [MAX333ACUP+T](#) [MAX333ACWP](#) [MAX333ACWP+T](#) [MAX333AEAP+](#) [MAX333AEAP+T](#)
[MAX333AEPP+](#) [MAX333AEUP+T](#) [MAX333AEWP+T](#) [MAX333ACWP-T](#) [MAX333AMJP](#) [MAX333AEWP/GG8-T](#)
[MAX333AMWP/PR](#) [MAX333AEPP](#)