


Automotive MLCC

NP0/X7R Dielectric

FLEXITERM FEATURES

- a) Bend Test
The capacitor is soldered to the PC Board as shown:

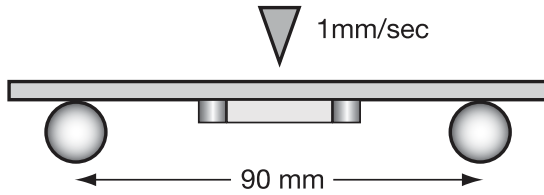

Typical bend test results are shown below:

Style	Conventional	Soft Term
0603	>2mm	>5
0805	>2mm	>5
1206	>2mm	>5

- a) Temperature Cycle testing
FLEXITERM® has the ability to withstand at least 1000 cycles between -55°C and +125°C

Automotive MLCC-NP0

Capacitance Range



SIZE		0402		0603				0805					1206					
Soldering		Reflow/Wave		Reflow/Wave				Reflow/Wave					Reflow/Wave					
WVDC		25V	50V	25V	50V	100V	200V	25V	50V	100V	200V	250V	25V	50V	100V	200V	250V	500V
0R5	0.5	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
1R0	1.0	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
1R2	1.2	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
1R5	1.5	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
1R8	1.8	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
2R2	2.2	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
2R7	2.7	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
3R3	3.3	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
3R9	3.9	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
4R7	4.7	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
5R6	5.6	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
6R8	6.8	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
8R2	8.2	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
100	10.0	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
120	12	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
150	15	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
180	18	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
220	22	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
270	27	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
330	33	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
390	39	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
470	47	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J	J	J
510	51	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J		
560	56	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J		
680	68	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J		
820	82	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J		
101	100	C	C	G	G	G	G	J	J	J	N	N	J	J	J	J		
121	120			G	G	G		J	J	J	N	N	J	J	J	J		
151	150			G	G	G		J	J	J	N	N	J	J	J	J		
181	180			G	G	G		J	J	J	N	N	J	J	J	J		
221	220			G	G	G		J	J	J	N	N	J	J	J	J		
271	270			G	G	G		J	J	J	N	N	J	J	J	J		
331	330			G	G	G		J	J	J	N	N	J	J	J	J		
391	390			G	G			J	J	J			J	J	J	J		
471	470			G	G			J	J	J			J	J	J	J		
561	560			G	G			J	J	J			J	J	J	J		
681	680			G	G			J	J	J			J	J	J	J		
821	820							J	J	J			J	J	J	J		
102	1000							J	J	J			J	J	J	J		
122	1200																	
152	1500																	
182	1800																	
222	2200																	
272	2700																	
332	3300																	
392	3900																	
472	4700																	
103	10nF																	
WVDC		25V	50V	25V	50V	100V	200V	25V	50V	100V	200V	250V	25V	50V	100V	200V	250V	500V
Size		0402		0603				0805					1206					

Letter	A	C	E	G	J	K	M	N	P	Q	X	Y	Z
Max. Thickness	0.33 (0.013)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)
	PAPER					EMBOSSED							

Automotive MLCC - X8R

Capacitance Range



SIZE			0603			0805			1206	
Soldering			Reflow/Wave			Reflow/Wave			Reflow/Wave	
WVDC	WVDC		25V	50V	100V	25V	50V	100V	25V	50V
472	pF	4700	G	G	G	J	J	J	J	J
562		5600	G	G	G	J	J	J	J	J
682		6800	G	G	G	J	J	J	J	J
822		8200	G	G	G	J	J	J	J	J
103	uF	0.01	G	G	G	J	J	J	J	J
123		0.012	G	G		J	J	N	J	J
153		0.015	G	G		J	J	N	J	J
183		0.018	G	G		J	J	N	J	J
223		0.022	G	G		J	J	N	J	J
273		0.027	G	G		J	J		J	J
333		0.033	G	G		J	J		J	J
393		0.039	G	G		J	J		J	J
473		0.047	G	G		J	J		J	J
563		0.056	G			N	N		M	M
683		0.068	G			N	N		M	M
823		0.082				N	N		M	M
104		0.1				N	N		M	M
124		0.12				N	N		M	M
154		0.15				N	N		M	M
184		0.18				N			M	M
224		0.22				N			M	M
274		0.27							M	M
334		0.33							M	M
394		0.39							M	M
474		0.47							M	Q
684		0.68							Q	Q
824		0.82							Q	Q
105		1							Q	Q
WVDC	WVDC		25V	50V	100V	25V	50V	100V	25V	50V
SIZE			0603			0805			1206	

Letter	A	C	E	G	J	K	M	N	P	Q	X	Y	Z
Max. Thickness	0.33 (0.013)	0.56 (0.022)	0.71 (0.028)	0.90 (0.035)	0.94 (0.037)	1.02 (0.040)	1.27 (0.050)	1.40 (0.055)	1.52 (0.060)	1.78 (0.070)	2.29 (0.090)	2.54 (0.100)	2.79 (0.110)
	PAPER					EMBOSSSED							

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

AVX:

[08055C102K4T4H](#) [08051C103K4T4H](#) [08055C683K4T4H](#) [12065C104K4T4H](#) [06031C103K4T4H](#) [06031C471K4T4H](#)
[08055C473K4T4H](#) [06033C473K4T4H](#)

Kyocera AVX:

[08051C221J4T4A](#) [06031A100B4T2A](#) [06031A100C4T2A](#) [06031A100D4T2A](#) [06031A100J4T2A](#) [06031A100K4T2A](#)
[06031A101F4T2A](#) [06031A101J4T2A](#) [06031A101J4T4A](#) [06031A101K4T2A](#) [06031A120F4T2A](#) [06031A120G4T2A](#)
[06031A121F4T2A](#) [06031A121G4T2A](#) [06031A121G4T4A](#) [06031A121J4T2A](#) [06031A150F4T2A](#) [06031A150J4T2A](#)
[06031A150K4T2A](#) [06031A151F4T2A](#) [06031A151J4T2A](#) [06031A151J4T4A](#) [06031A180F4T2A](#) [06031A180J4T2A](#)
[06031A180J4T4A](#) [06031A180K4T2A](#) [06031A181F4T2A](#) [06031A181J4T2A](#) [06031A181J4T7A](#) [06031A181K4T2A](#)
[06031A1R0C4T2A](#) [06031A1R5D4T2A](#) [06031A1R8B4T2A](#) [06031A1R8B4T4A](#) [06031A200F4T2A](#) [06031A200J4T4A](#)
[06031A220F4T2A](#) [06031A220J4T2A](#) [06031A220K4T2A](#) [06031A221J4T2A](#) [06031A221J4T4A](#) [06031A221K4T2A](#)
[06031A270F4T2A](#) [06031A270J4T2A](#) [06031A271F4T2A](#) [06031A271J4T2A](#) [06031A271K4T2A](#) [06031A2R0B4T2A](#)
[06031A2R0C4T2A](#) [06031A2R2C4T2A](#) [06031A300J4T2A](#) [06031A330G4T2A](#) [06031A330J4T2A](#) [06031A330K4T2A](#)
[06031A331F4T2A](#) [06031A331J4T2A](#) [06031A331K4T2A](#) [06031A390J4T2A](#) [06031A390K4T2A](#) [06031A390K4T4A](#)
[06031A3R0B4T2A](#) [06031A3R0C4T2A](#) [06031A3R3C4T4A](#) [06031A3R6B4T2A](#) [06031A3R9C4T2A](#) [06031A3R9C4T4A](#)
[06031A3R9D4T2A](#) [06031A470J4T2A](#) [06031A470K4T2A](#) [06031A4R0B4T2A](#) [06031A4R3B4T2A](#) [06031A4R7B4T2A](#)
[06031A4R7C4T2A](#) [06031A4R7C4T4A](#) [06031A4R7D4T2A](#) [06031A560F4T2A](#) [06031A5R0B4T2A](#) [06031A5R0B4T4A](#)
[06031A5R1D4T2A](#) [06031A680F4T2A](#) [06031A680F4T4A](#) [06031A680J4T2A](#) [06031A6R2C4T4A](#) [06031A6R8C4T2A](#)
[06031A7R5B4T2A](#) [06031A7R5D4T2A](#) [06031A820F4T2A](#) [06031A820F4T4A](#) [06031A820J4T4A](#) [06031A8R0D4T4A](#)
[06031A8R2C4T2A](#) [06031A9R1D4T2A](#) [06031AR51D4T2A](#) [06031C102J4T2A](#) [06031C102K4T2A](#) [06031C102K4T4A](#)
[06031C102K4Z2A](#) [06031C102M4T2A](#) [06031C102M4T4A](#) [06031C103K4T2A](#)