

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

| Part number | Marking code | Breakdown voltage $V_{BR}@I_T^{(1)}$ (V) | | Test current I_T (mA) | Working stand-off voltage V_{WM} (V) | Maximum reverse leakage current $I_R@V_{WM}^{(1)}$ (μA) | Maximum peak impulse current I_{PPM} (A) ⁽²⁾ | Maximum clamping voltage $V_C@I_{PPM}$ (V) ⁽²⁾ |
|-------------|--------------|------------------------------------------------|-------|-------------------------------|----------------------------------------------|-------------------------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------|
| | | Min. | Max. | | | | | |
| SMAJ5.0 | AD | 6.4 | 7.30 | 10 | 5 | 800 | 41.7 | 9.6 |
| SMAJ5.0A | AE | 6.4 | 7.00 | 10 | 5 | 800 | 43.5 | 9.2 |
| SMAJ6.0 | AF | 6.67 | 8.15 | 10 | 6 | 800 | 35.1 | 11.4 |
| SMAJ6.0A | AG | 6.67 | 7.37 | 10 | 6 | 800 | 38.8 | 10.3 |
| SMAJ6.5 | AH | 7.22 | 8.82 | 10 | 6.5 | 500 | 32.5 | 12.3 |
| SMAJ6.5A | AK | 7.22 | 7.98 | 10 | 6.5 | 500 | 35.7 | 11.2 |
| SMAJ7.0 | AL | 7.78 | 9.51 | 10 | 7 | 200 | 30.1 | 13.3 |
| SMAJ7.0A | AM | 7.78 | 8.60 | 10 | 7 | 200 | 33.3 | 12.0 |
| SMAJ7.5 | AN | 8.33 | 10.30 | 1 | 7.5 | 100 | 28.0 | 14.3 |
| SMAJ7.5A | AP | 8.33 | 9.21 | 1 | 7.5 | 100 | 31.0 | 12.9 |
| SMAJ8.0 | AQ | 8.89 | 10.90 | 1 | 8 | 50 | 26.7 | 15.0 |
| SMAJ8.0A | AR | 8.89 | 9.83 | 1 | 8 | 50 | 29.4 | 13.6 |
| SMAJ8.5 | AS | 9.44 | 11.50 | 1 | 8.5 | 10 | 25.2 | 15.9 |
| SMAJ8.5A | AT | 9.44 | 10.40 | 1 | 8.5 | 10 | 27.8 | 14.4 |
| SMAJ9.0 | AU | 10.0 | 12.20 | 1 | 9 | 5 | 23.7 | 16.9 |
| SMAJ9.0A | AV | 10.0 | 11.10 | 1 | 9 | 5 | 26.0 | 15.4 |
| SMAJ10 | AW | 11.1 | 13.60 | 1 | 10 | 5 | 21.3 | 18.8 |
| SMAJ10A | AX | 11.1 | 12.30 | 1 | 10 | 5 | 23.5 | 17.0 |
| SMAJ11 | AY | 12.2 | 14.90 | 1 | 11 | 1 | 19.9 | 20.1 |
| SMAJ11A | AZ | 12.2 | 13.50 | 1 | 11 | 1 | 22.0 | 18.2 |
| SMAJ12 | BD | 13.3 | 16.30 | 1 | 12 | 1 | 18.2 | 22.0 |
| SMAJ12A | BE | 13.3 | 14.70 | 1 | 12 | 1 | 20.1 | 19.9 |
| SMAJ13 | BF | 14.4 | 17.60 | 1 | 13 | 1 | 16.8 | 23.8 |
| SMAJ13A | BG | 14.4 | 15.90 | 1 | 13 | 1 | 18.6 | 21.5 |
| SMAJ14 | BH | 15.6 | 19.10 | 1 | 14 | 1 | 15.5 | 25.8 |
| SMAJ14A | BK | 15.6 | 17.20 | 1 | 14 | 1 | 17.2 | 23.2 |
| SMAJ15 | BL | 16.7 | 20.40 | 1 | 15 | 1 | 14.9 | 26.9 |
| SMAJ15A | BM | 16.7 | 18.50 | 1 | 15 | 1 | 16.4 | 24.4 |
| SMAJ16 | BN | 17.8 | 21.80 | 1 | 16 | 1 | 13.9 | 28.8 |
| SMAJ16A | BP | 17.8 | 19.70 | 1 | 16 | 1 | 15.4 | 26.0 |
| SMAJ17 | BQ | 18.9 | 23.10 | 1 | 17 | 1 | 13.1 | 30.5 |
| SMAJ17A | BR | 18.9 | 20.90 | 1 | 17 | 1 | 14.5 | 27.6 |
| SMAJ18 | BS | 20.0 | 24.40 | 1 | 18 | 1 | 12.4 | 32.2 |
| SMAJ18A | BT | 20.0 | 22.10 | 1 | 18 | 1 | 13.7 | 29.2 |
| SMAJ20 | BU | 22.2 | 27.10 | 1 | 20 | 1 | 11.2 | 35.8 |
| SMAJ20A | BV | 22.2 | 24.50 | 1 | 20 | 1 | 12.3 | 32.4 |
| SMAJ22 | BW | 24.4 | 29.80 | 1 | 22 | 1 | 10.2 | 39.4 |
| SMAJ22A | BX | 24.4 | 26.90 | 1 | 22 | 1 | 11.3 | 35.5 |
| SMAJ24 | BY | 26.7 | 32.60 | 1 | 24 | 1 | 9.3 | 43.0 |
| SMAJ24A | BZ | 26.7 | 29.50 | 1 | 24 | 1 | 10.3 | 38.9 |
| SMAJ26 | CD | 28.9 | 35.30 | 1 | 26 | 1 | 8.6 | 46.6 |
| SMAJ26A | CE | 28.9 | 31.90 | 1 | 26 | 1 | 9.5 | 42.1 |
| SMAJ28 | CF | 31.1 | 38.00 | 1 | 28 | 1 | 8.0 | 50.0 |
| SMAJ28A | CG | 31.1 | 34.40 | 1 | 28 | 1 | 8.8 | 45.4 |
| SMAJ30 | CH | 33.3 | 40.7 | 1 | 30 | 1 | 7.5 | 53.5 |
| SMAJ30A | CK | 33.3 | 36.8 | 1 | 30 | 1 | 8.3 | 48.4 |
| SMAJ33 | CL | 36.7 | 44.9 | 1 | 33 | 1 | 6.8 | 59.0 |
| SMAJ33A | CM | 36.7 | 40.6 | 1 | 33 | 1 | 7.5 | 53.3 |

ELECTRICAL SPECIFICATIONS ($T_A = 25^\circ\text{C}$ unless otherwise noted)

| Part number | Marking code | Breakdown voltage $V_{BR}@I_T^{(1)}$ (V) | | Test current I_T (mA) | Working stand-off voltage V_{WM} (V) | Maximum reverse leakage current $I_R@V_{WM}^{(1)}$ (μA) | Maximum peak impulse current I_{PPM} (A) ⁽²⁾ | Maximum clamping voltage $V_C@I_{PPM}$ (V) ⁽²⁾ |
|-------------|--------------|------------------------------------------------|------|-------------------------------|----------------------------------------------|-------------------------------------------------------------------------|--------------------------------------------------------------|--------------------------------------------------------------|
| | | Min. | Max. | | | | | |
| SMAJ36 | CN | 40.0 | 48.9 | 1 | 36 | 1 | 6.2 | 64.3 |
| SMAJ36A | CP | 40.0 | 44.2 | 1 | 36 | 1 | 6.9 | 58.1 |
| SMAJ40 | CQ | 44.4 | 54.3 | 1 | 40 | 1 | 5.6 | 71.4 |
| SMAJ40A | CR | 44.4 | 49.1 | 1 | 40 | 1 | 6.2 | 64.5 |
| SMAJ43 | CS | 47.8 | 58.4 | 1 | 43 | 1 | 5.2 | 76.7 |
| SMAJ43A | CT | 47.8 | 52.8 | 1 | 43 | 1 | 5.8 | 69.4 |
| SMAJ45 | CU | 50.0 | 61.1 | 1 | 45 | 1 | 5.0 | 80.3 |
| SMAJ45A | CV | 50.0 | 55.3 | 1 | 45 | 1 | 5.5 | 72.7 |
| SMAJ48 | CW | 53.3 | 65.1 | 1 | 48 | 1 | 4.7 | 85.5 |
| SMAJ48A | CX | 53.3 | 58.9 | 1 | 48 | 1 | 5.2 | 77.4 |
| SMAJ51 | CY | 56.7 | 69.3 | 1 | 51 | 1 | 4.4 | 91.1 |
| SMAJ51A | CZ | 56.7 | 62.7 | 1 | 51 | 1 | 4.9 | 82.4 |
| SMAJ54 | RD | 60.0 | 73.3 | 1 | 54 | 1 | 4.2 | 96.3 |
| SMAJ54A | RE | 60.0 | 66.3 | 1 | 54 | 1 | 4.6 | 87.1 |
| SMAJ58 | RF | 64.4 | 78.7 | 1 | 58 | 1 | 3.9 | 103 |
| SMAJ58A | RG | 64.4 | 71.2 | 1 | 58 | 1 | 4.3 | 93.6 |
| SMAJ60 | RH | 66.7 | 81.5 | 1 | 60 | 1 | 3.7 | 107 |
| SMAJ60A | RK | 66.7 | 73.7 | 1 | 60 | 1 | 4.1 | 96.8 |
| SMAJ64 | RL | 71.1 | 86.9 | 1 | 64 | 1 | 3.5 | 114 |
| SMAJ64A | RM | 71.1 | 78.6 | 1 | 64 | 1 | 3.9 | 103 |
| SMAJ70 | RN | 77.8 | 95.1 | 1 | 70 | 1 | 3.2 | 125 |
| SMAJ70A | RP | 77.8 | 86 | 1 | 70 | 1 | 3.5 | 113 |
| SMAJ75 | RQ | 83.3 | 102 | 1 | 75 | 1 | 3.0 | 134 |
| SMAJ75A | RR | 83.3 | 92.1 | 1 | 75 | 1 | 3.3 | 121 |
| SMAJ78 | RS | 86.7 | 106 | 1 | 78 | 1 | 2.9 | 139 |
| SMAJ78A | RT | 86.7 | 95.8 | 1 | 78 | 1 | 3.2 | 126 |
| SMAJ85 | RU | 94.4 | 115 | 1 | 85 | 1 | 2.0 | 151 |
| SMAJ85A | RV | 94.4 | 104 | 1 | 85 | 1 | 2.2 | 137 |
| SMAJ90 | RW | 100 | 122 | 1 | 90 | 1 | 1.9 | 160 |
| SMAJ90A | RX | 100 | 111 | 1 | 90 | 1 | 2.1 | 146 |
| SMAJ100 | RY | 111 | 136 | 1 | 100 | 1 | 1.7 | 179 |
| SMAJ100A | RZ | 111 | 123 | 1 | 100 | 1 | 1.9 | 162 |
| SMAJ110 | SD | 122 | 149 | 1 | 110 | 1 | 1.6 | 196 |
| SMAJ110A | SE | 122 | 135 | 1 | 110 | 1 | 1.7 | 177 |
| SMAJ120 | SF | 133 | 163 | 1 | 120 | 1 | 1.4 | 214 |
| SMAJ120A | SG | 133 | 147 | 1 | 120 | 1 | 1.6 | 193 |
| SMAJ130 | SH | 144 | 176 | 1 | 130 | 1 | 1.3 | 231 |
| SMAJ130A | SK | 144 | 159 | 1 | 130 | 1 | 1.5 | 209 |
| SMAJ150 | SL | 167 | 204 | 1 | 150 | 1 | 1.1 | 266 |
| SMAJ150A | SM | 167 | 185 | 1 | 150 | 1 | 1.3 | 243 |
| SMAJ160 | SN | 178 | 218 | 1 | 160 | 1 | 1.0 | 287 |
| SMAJ160A | SP | 178 | 197 | 1 | 160 | 1 | 1.2 | 259 |
| SMAJ170 | SQ | 189 | 231 | 1 | 170 | 1 | 1.0 | 304 |
| SMAJ170A | SR | 189 | 209 | 1 | 170 | 1 | 1.1 | 275 |
| SMAJ188 | ST | 209 | 255 | 1 | 188 | 1 | 0.9 | 344 |
| SMAJ188A | SS | 209 | 231 | 1 | 188 | 1 | 0.9 | 328 |

Notes:

1. Pulse test with PW=30 ms
2. Non-repetitive current pulse, per Fig. 3 and derated above $T_A=25^\circ\text{C}$ per Fig. 2
3. Peak pulse power waveform is 10/1000 μs
4. For bi-directional devices having V_R of 10 V and under, the I_R limit is double.

| ORDERING INFORMATION | | |
|--------------------------------------|----------------|--------------------------|
| ORDERING CODE (Note 1,2,3) | PACKAGE | PACKING |
| SMAJxxxAHR3G | SMA | 1,800 / 7" Plastic reel |
| SMAJxxxAHR2G | SMA | 7,500 / 13" Paper reel |
| SMAJxxxAHM2G | SMA | 7,500 / 13" Plastic reel |
| SMAJxxxAHF3G | Folded SMA | 1,800 / 7" Plastic reel |
| SMAJxxxAHF2G | Folded SMA | 7,500 / 13" Paper reel |
| SMAJxxxAHF4G | Folded SMA | 7,500 / 13" Plastic reel |
| SMAJxxxAHE3G | Clip SMA | 1,800 / 7" Plastic reel |
| SMAJxxxAHE2G | Clip SMA | 7,500 / 13" Plastic reel |
| SMAJxxxA R3G | SMA | 1,800 / 7" Plastic reel |
| SMAJxxxA R2G | SMA | 7,500 / 13" Paper reel |
| SMAJxxxA M2G | SMA | 7,500 / 13" Plastic reel |
| SMAJxxxA F3G | Folded SMA | 1,800 / 7" Plastic reel |
| SMAJxxxA F2G | Folded SMA | 7,500 / 13" Paper reel |
| SMAJxxxA F4G | Folded SMA | 7,500 / 13" Plastic reel |
| SMAJxxxA E3G | Clip SMA | 1,800 / 7" Plastic reel |
| SMAJxxxA E2G | Clip SMA | 7,500 / 13" Plastic reel |
| SMAJxxxAHR3 | SMA | 1,800 / 7" Plastic reel |
| SMAJxxxAHR2 | SMA | 7,500 / 13" Paper reel |
| SMAJxxxAHM2 | SMA | 7,500 / 13" Plastic reel |
| SMAJxxxAHF3 | Folded SMA | 1,800 / 7" Plastic reel |
| SMAJxxxAHF2 | Folded SMA | 7,500 / 13" Paper reel |
| SMAJxxxAHF4 | Folded SMA | 7,500 / 13" Plastic reel |
| SMAJxxxAHE3 | Clip SMA | 1,800 / 7" Plastic reel |
| SMAJxxxAHE2 | Clip SMA | 7,500 / 13" Plastic reel |
| SMAJxxxA R3 | SMA | 1,800 / 7" Plastic reel |
| SMAJxxxA R2 | SMA | 7,500 / 13" Paper reel |
| SMAJxxxA M2 | SMA | 7,500 / 13" Plastic reel |
| SMAJxxxA F3 | Folded SMA | 1,800 / 7" Plastic reel |
| SMAJxxxA F2 | Folded SMA | 7,500 / 13" Paper reel |
| SMAJxxxA F4 | Folded SMA | 7,500 / 13" Plastic reel |
| SMAJxxxA E3 | Clip SMA | 1,800 / 7" Plastic reel |
| SMAJxxxA E2 | Clip SMA | 7,500 / 13" Plastic reel |

Note 1:

"xxx" defines voltage from 5V (SMAJ5.0) to 188V (SMAJ188)

Note 2:

"H" means AEC-Q101 qualified

Note 3:

"G" means green compound (halogen free)

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Peak Pulse Power Rating Curve

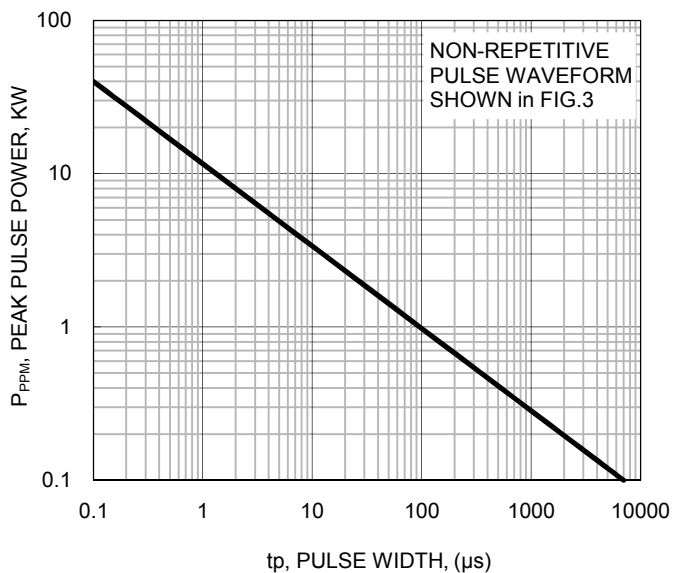


Fig.2 Pulse Derating Curve

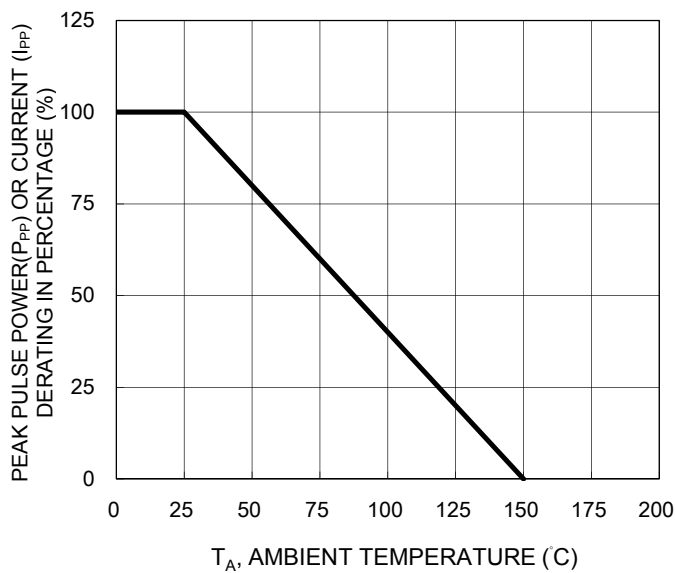


Fig.3 Clamping Power Pulse Waveform


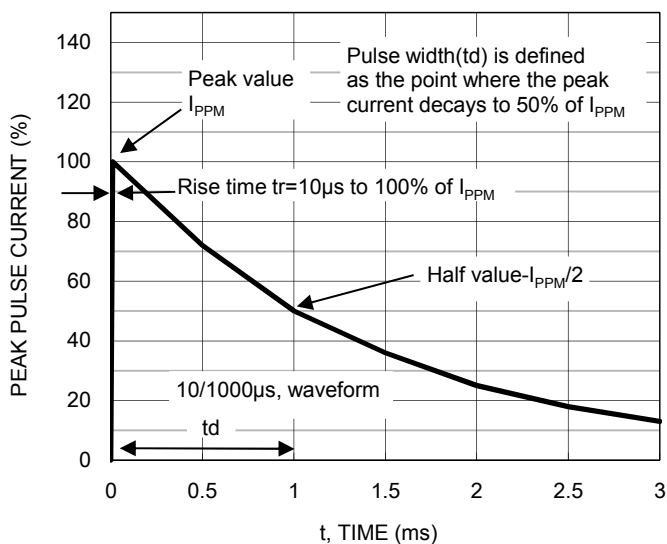



Fig.4 Maximum Non-repetitive Forward Surge Current

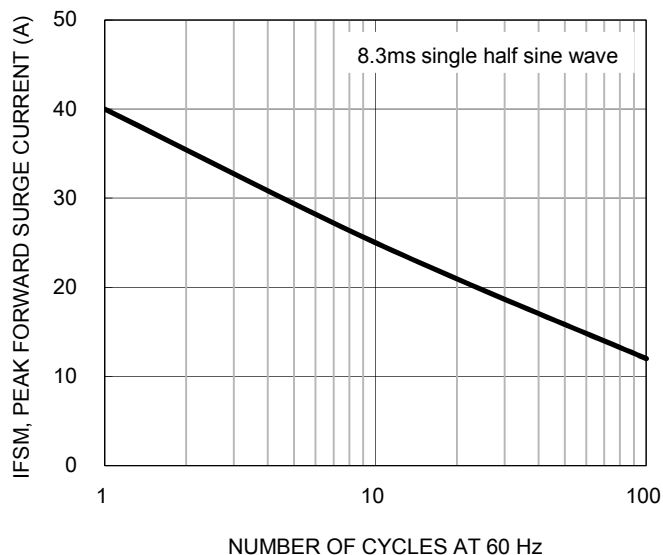

CHARACTERISTICS CURVES


($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.5 Typical Junction Capacitance

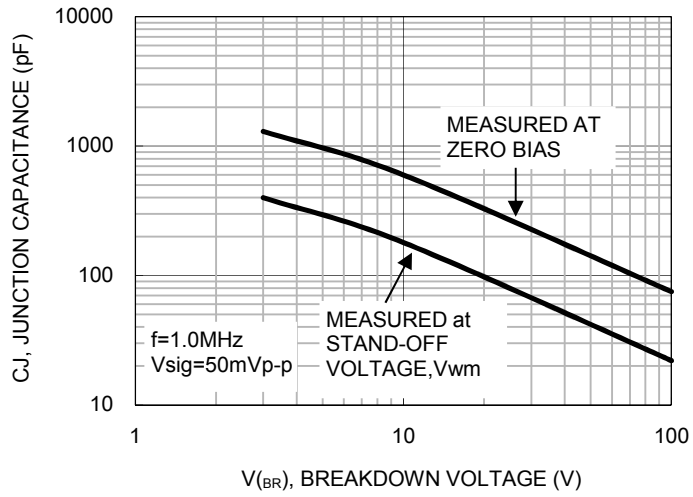


PACKAGE OUTLINE DIMENSIONS

DO-214AC (SMA)

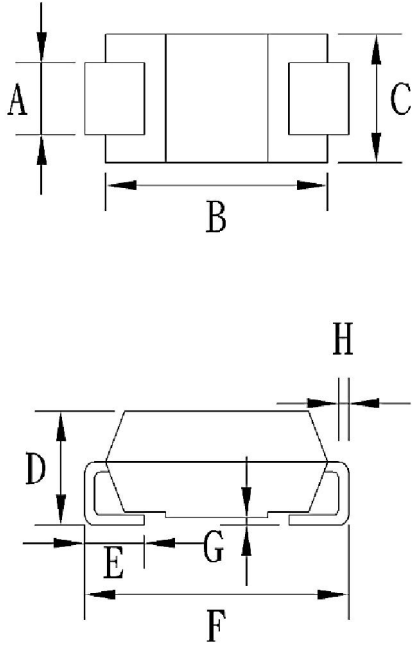

| DIM | Unit (mm) | | Unit (inch) | |
|-----|-----------|------|-------------|-------|
| | Min | Max | Min | Max |
| A | 1.27 | 1.58 | 0.050 | 0.062 |
| B | 4.06 | 4.60 | 0.160 | 0.181 |
| C | 2.29 | 2.83 | 0.090 | 0.111 |
| D | 1.99 | 2.50 | 0.078 | 0.098 |
| E | 0.90 | 1.41 | 0.035 | 0.056 |
| F | 4.95 | 5.33 | 0.195 | 0.210 |
| G | 0.10 | 0.20 | 0.004 | 0.008 |
| H | 0.15 | 0.31 | 0.006 | 0.012 |

SUGGESTED PAD LAYOUT

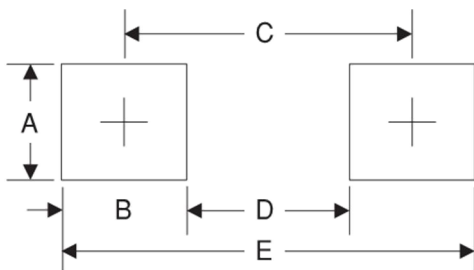

| Symbol | Unit (mm) | Unit (inch) |
|--------|-----------|-------------|
| A | 1.68 | 0.066 |
| B | 1.52 | 0.060 |
| C | 3.93 | 0.155 |
| D | 2.41 | 0.095 |
| E | 5.45 | 0.215 |

MARKING DIAGRAM



- P/N = Marking Code
- G = Green Compound
- YW = Date Code
- F = Factory Code

Note: Cathode band for uni-directional products only

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taiwan Semiconductor:

[SMAJ100A](#) [SMAJ10A](#) [SMAJ110A](#) [SMAJ11A](#) [SMAJ120A](#) [SMAJ12A](#) [SMAJ130A](#) [SMAJ13A](#) [SMAJ14A](#) [SMAJ150A](#)
[SMAJ15A](#) [SMAJ160A](#) [SMAJ16A](#) [SMAJ170A](#) [SMAJ17A](#) [SMAJ18A](#) [SMAJ20A](#) [SMAJ22A](#) [SMAJ24A](#) [SMAJ26A](#)
[SMAJ28A](#) [SMAJ30A](#) [SMAJ33A](#) [SMAJ36A](#) [SMAJ40A](#) [SMAJ43A](#) [SMAJ45A](#) [SMAJ48A](#) [SMAJ5.0A](#) [SMAJ51A](#)
[SMAJ54A](#) [SMAJ58A](#) [SMAJ6.0A](#) [SMAJ64A](#) [SMAJ78A](#) [SMAJ8.5A](#) [SMAJ6.0A R2](#) [SMAJ36A R2](#) [SMAJ120A R2](#)
[SMAJ17A R2](#) [SMAJ45A R2](#) [SMAJ20A R2](#) [SMAJ16A R2](#) [SMAJ12A R2](#) [SMAJ33A R2](#) [SMAJ14A R2](#) [SMAJ15A R2](#)
[SMAJ130A R2](#) [SMAJ28A R2](#) [SMAJ150A R2](#) [SMAJ170A R2](#) [SMAJ58A R2](#) [SMAJ130A R3](#) [SMAJ120A R3](#)
[SMAJ17A R3](#) [SMAJ14A R3](#) [SMAJ5.0AHR2G](#) [SMAJ54A R3G](#) [SMAJ8.0A R3](#) [SMAJ20AHR3](#) [SMAJ54AHR2](#)
[SMAJ5.0AHR3G](#) [SMAJ58A R3G](#) [SMAJ100A R3](#) [SMAJ7.0A R3](#) [SMAJ40AHR3](#) [SMAJ54AHR3](#) [SMAJ64A R3G](#)
[SMAJ9.0AHR3](#) [SMAJ26AHR2G](#) [SMAJ9.0AHR3G](#) [SMAJ36AHR2G](#) [SMAJ64A R3](#) [SMAJ85AHR2](#) [SMAJ120AHR3G](#)
[SMAJ110A R3G](#) [SMAJ7.0AHR2G](#) [SMAJ160AHR3](#) [SMAJ48AHR2](#) [SMAJ60AHR3G](#) [SMAJ14A R3G](#) [SMAJ78AHR2G](#)
[SMAJ78A R3](#) [SMAJ15AHR2G](#) [SMAJ13A R3G](#) [SMAJ43AHR3G](#) [SMAJ43AHR2](#) [SMAJ7.0A R3G](#) [SMAJ14AHR3](#)
[SMAJ15AHR2](#) [SMAJ36A R3](#) [SMAJ10AHR2](#) [SMAJ6.5AHR2](#) [SMAJ18AHR2](#) [SMAJ160AHR2](#) [SMAJ51A R3](#)
[SMAJ85A R3](#) [SMAJ60A R3](#) [SMAJ85AHR2G](#) [SMAJ100AHR3](#)