
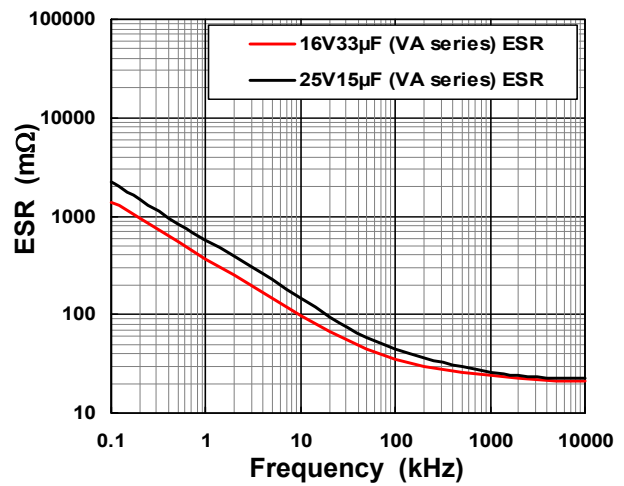


● Part number & Specifications

Rated Voltage (V)	Rated Capacitance (μF, 120Hz)	Part Number		Leakage Current* (μA, 2 min)	tanδ (120Hz)	ESR (mΩ, 100kHz)	Rated Ripple Current (mA, r.m.s.)	Size L×W×H(mm)	MSL (J-STD-020D)
		NICHICON	FPCAP						
2.0	330	RVB0D331MNG	FP-2R0CM331M-VBR	700	0.12	15	2800	7.3 × 4.3 × 2.8	Level 3
	330	RVC0D331MNG	FP-2R0CM331M-VCR	700	0.12	9	3300	7.3 × 4.3 × 2.8	Level 3
2.5	220	RVA0E221MNG	FP-2R5CM221M-VAR	700	0.12	18	2600	7.3 × 4.3 × 2.8	Level 3
	220	RVB0E221MNG	FP-2R5CM221M-VBR	700	0.12	15	2800	7.3 × 4.3 × 2.8	Level 3
4.0	150	RVA0G151MNG	FP-4R0CM151M-VAR	700	0.12	18	2600	7.3 × 4.3 × 2.8	Level 3
	150	RVB0G151MNG	FP-4R0CM151M-VBR	700	0.12	15	2800	7.3 × 4.3 × 2.8	Level 3
	220	RVB0G221MNG	FP-4R0CM221M-VBR	1000	0.12	15	2800	7.3 × 4.3 × 2.8	Level 3
6.3	100	RVA0J101MNG	FP-6R3CM101M-VAR	700	0.12	25	2000	7.3 × 4.3 × 2.8	Level 3
	100	RVB0J101MNG	FP-6R3CM101M-VBR	700	0.12	20	2400	7.3 × 4.3 × 2.8	Level 3
	150	RVB0J151MNG	FP-6R3CM151M-VBR	1000	0.12	20	2400	7.3 × 4.3 × 2.8	Level 3
16	27	RVA1C270MNG	FP-016CM270M-VAR	216	0.12	55	1100	7.3 × 4.3 × 2.8	Level 3
	33	RVA1C330MNG	FP-016CM330M-VAR	264	0.12	55	1100	7.3 × 4.3 × 2.8	Level 3
	47	RVA1C470MNG	FP-016CM470M-VAR	376	0.12	55	1100	7.3 × 4.3 × 2.8	Level 3
25	15	RVA1E150MNG	FP-025CM150M-VAR	188	0.12	60	1000	7.3 × 4.3 × 2.8	Level 3
	27	RVA1E270MNG	FP-025CM270M-VAR	337	0.12	60	1000	7.3 × 4.3 × 2.8	Level 3


\* In case of some doubt about measured values, measure after applying rated voltage for 120 minutes at 105°C.

● Frequency Characteristics

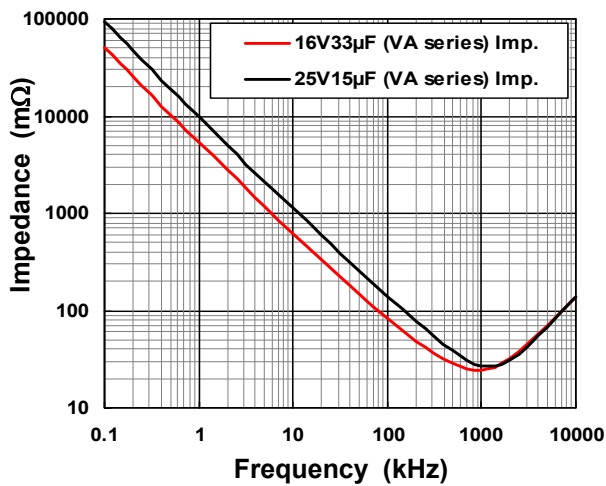


● Part Number (EX) 2.0V, 330μF, VB series

Nichicon P/N

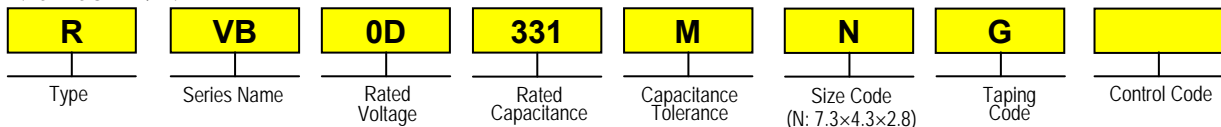

FPCAP P/N



# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Nichicon:

[RVA0E221MNG](#) [RVA0G151MNG](#) [RVA0J101MNG](#) [RVA1C270MNG](#) [RVA1C330MNG](#) [RVA1E150MNG](#)  
[RVB0E221MNG](#) [RVB0G151MNG](#) [RVB0J101MNG](#) [RVB0G221MNG](#) [RVA1E270MNG](#) [RVA1C470MNG](#)  
[RVB0J151MNG](#) [RVB0D331MNG](#) [RVB1E270MNG](#) [RVB1E150MNG](#) [RVB1C470MNG](#) [RVB1C270MNG](#)  
[RVB1C330MNG](#) [RVC0D331MNG](#)