

MAXIMUM RATINGS (at TA=25°C unless otherwise noted)

| PARAMETER | SYMBOL | CONDITIONS | Max | UNITS |
|-------------------------------------|------------------|---|---------------|----------------------|
| Continuous Forward Current | I _F | single diode loaded (note 1) | 215 | mA |
| | | double diode loaded (note 1) | 125 | |
| Non-repetitive Peak Forward Current | I _{FSM} | square wave, T _j =25 °C prior to surge t=1us t=1ms t=1s | 4 1 0.5 | Amps Amps Amps |
| Total Power Dissipation | P _{LOT} | T _{amb} = 25 °C | 250 | mW |

Note: 1.Device mounted on an FR4 printed-circuit board.

RATING AND CHARACTERISTIC CURVES (BAW56)

FIG. 1 - Maximum permissible continuous forward current as a function of ambient temperature

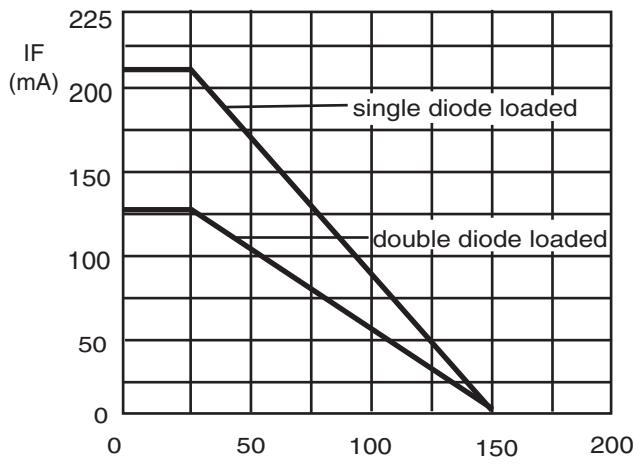


FIG. 2 - Forward current as a function of forward voltage

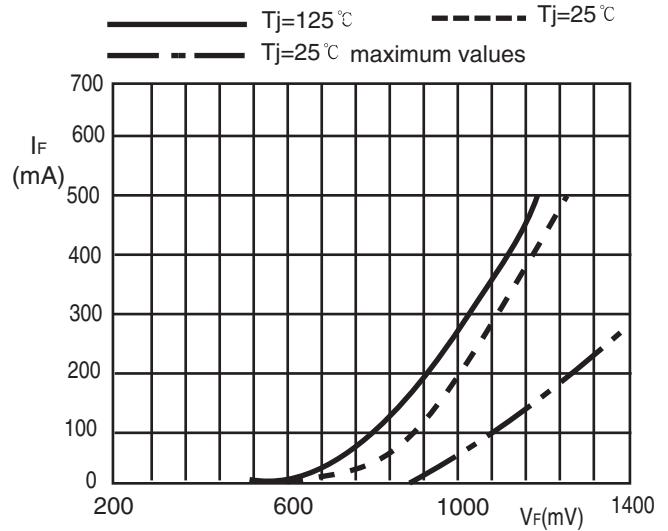


FIG. 3 - Maximum permissible non-repetitive peak forward current as a function of pulse duration

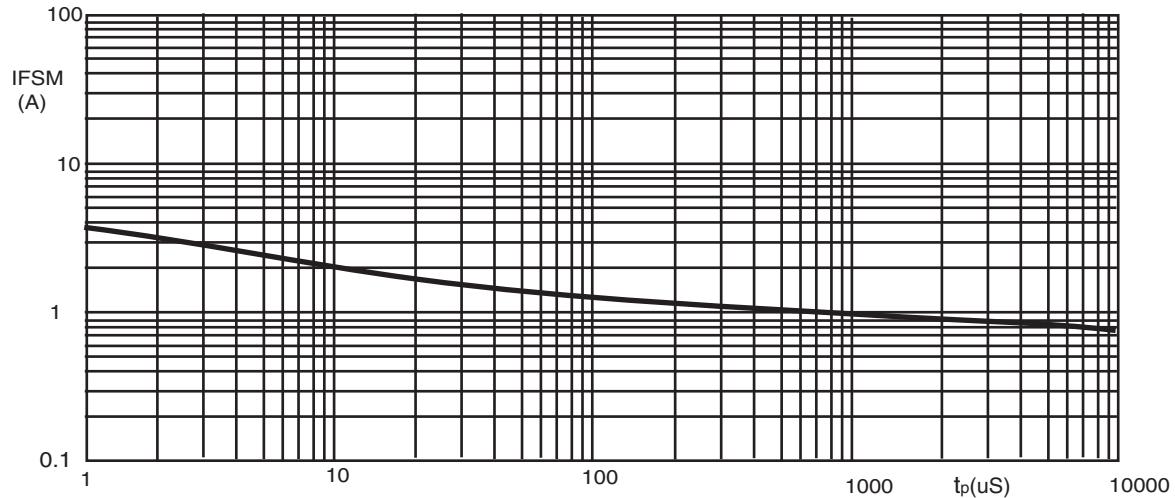


FIG. 4 - Reverse current as a function of junction temperature

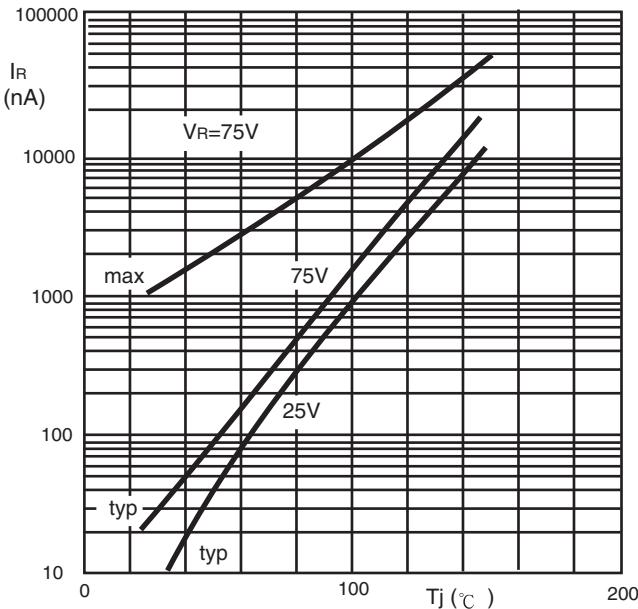


FIG. 5 - Diode capacitance as a function of reverse voltage ; typical values $f=1\text{MHz}; T_j=25^\circ\text{C}$

