### **ABSOLUTE MAXIMUM RATINGS**

Supply Voltage -0.6V to 15V Power Dissipation (T<sub>amb</sub>= 25°C) Supply Current 100mA QSOP16 500mW 0 to 15mA QSOP20 650mW

Drain Current (per FET) (set by R<sub>CAL1</sub> and R<sub>CAL2</sub>)

**Output Current** 100mA -40 to 70°C Operating Temperature Storage Temperature -50 to 85°C

# ELECTRICAL CHARACTERISTICS TEST CONDITIONS (Unless otherwise stated): Tamb=25°C,VCC=5V,ID=10mA (RCAL1=33k $\Omega$ ;RCAL2=33k $\Omega$ )

SYMBOL	PARAMETER	CONDITIONS	LIMITS			UNITS
			Min	Тур	Max	
V <sub>CC</sub>	Supply Voltage		5		12	V
I <sub>CC</sub>	Supply Current ZNBG4000/1	I <sub>D1</sub> to I <sub>D4</sub> =0 I <sub>D1</sub> to I <sub>D4</sub> =10mA			10 50	mA mA
I <sub>CC</sub>	Supply Current ZNBG6000/1	ID1 to I <sub>D6</sub> =0 I <sub>D1</sub> to I <sub>D6</sub> =10mA			15 75	mA mA
$V_{SUB}$	Substrate Voltage (Internally generated)	$I_{SUB}=0$ $I_{SUB}=-200\mu A$	-3.5	-3	-2 -2	V V
E <sub>ND</sub> E <sub>NG</sub>	Output Noise Drain Voltage Gate Voltage	$C_G$ =4.7nF, $C_D$ =10nF $C_G$ =4.7nF, $C_D$ =10nF			0.02 0.005	Vpkpk Vpkpk
f <sub>O</sub>	Oscillator Freq.		200	350	800	kHz

#### **DRAIN CHARACTERISTICS**

$I_D$	Current		8	10	12	mA
	Current Change					
$\Delta I_{DV}$	with V <sub>CC</sub>	V <sub>CC</sub> =5 to 12V		0.02		%/V
$\Delta I_{DT}$	with T <sub>j</sub>	$T_j$ =-40 to +70°C		0.05		%/°C
$V_D$	Voltage ZNBG4000, ZNGB6000 ZNBG4001, ZNBG6001		2 1.8	2.2	2.4 2.2	V V
	Voltage Change					
$\Delta V_{DV}$	with V <sub>CC</sub>	V <sub>CC</sub> = 5 to 12V		0.5		%/V
$\Delta V_{DT}$	with T <sub>j</sub>	$T_j = -40 \text{ to } +70^{\circ}\text{C}$		50		ppm

SYMBOL	PARAMETER	CONDITIONS	LIMITS			UNITS
			Min	Тур	Max	

#### **GATE CHARACTERISTICS**

$I_{GO}$	Output Current Range		-30	2000	μΑ
	Output Voltage ZNBG4000/1				
V <sub>OL</sub>	Output Low	I <sub>D1</sub> to I <sub>D4</sub> =12mA I <sub>G1</sub> to I <sub>G4</sub> =0	-3.5	-2	V
		$I_{D1}$ to $I_{D4}$ =12mA $I_{G1}$ to $I_{G4}$ = -10 $\mu$ A	-3.5	-2	V
V <sub>OH</sub>	Output High	$I_{D1}$ to $I_{D4}$ = 8mA $I_{G1}$ to $I_{G4}$ = 0	0	1	V
	Output Voltage ZNBG6000/1				
V <sub>OL</sub>	Output Low	I <sub>D1</sub> to I <sub>D6</sub> =12mA I <sub>G1</sub> to I <sub>G6</sub> = 0	-3.5	-2	V
		$I_{D1}$ to $I_{D6}$ =12mA $I_{G1}$ to $I_{G6}$ = -10 $\mu$ A	-3.5	-2	V
V <sub>OH</sub>	Output High	I <sub>D1</sub> to I <sub>D6</sub> = 8mA I <sub>G1</sub> to I <sub>G6</sub> = 0	0	1	V


#### Notes

- 3. Noise voltage is not measured in production.
- 4. Noise voltage measurement is made with FETs and gate and drain capacitors in place on all outputs.  $C_G$ , 4.7nF, are connected between gate outputs and ground,  $C_D$ , 10nF, are connected between drain outputs and ground.


<sup>1.</sup> The negative bias voltages specified are generated on-chip using an internal oscillator. Two external capacitors,  $C_{NB}$  and  $C_{SUB}$ , of 47nF are required for this purpose.

<sup>2.</sup> The characteristics are measured using two external reference resistors  $R_{CAL1}$  and  $R_{CAL2}$  of value  $33k\Omega$  wired from pins  $R_{CAL12}$  to ground. For the ZNBG4000, resistor  $R_{CAL1}$  sets the drain current of FETs 1 and 2, resistor  $R_{CAL2}$  sets the drain current of FETs 3 and 4. For the ZNBG6000, resistor  $R_{CAL1}$  sets the drain current of FETs 1 and 4, resistor  $R_{CAL2}$  sets the drain current of FETs 2, 3, 5 and 6.

## **TYPICAL CHARACTERISTICS**

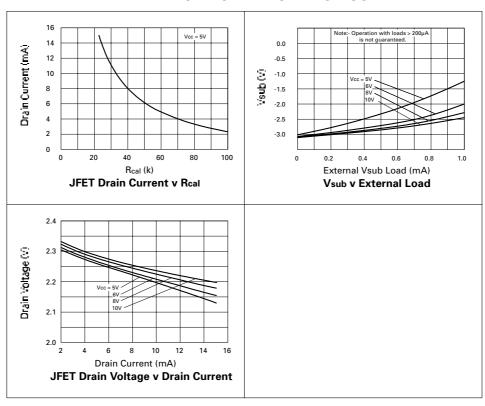

#### **FUNCTIONAL DIAGRAM**

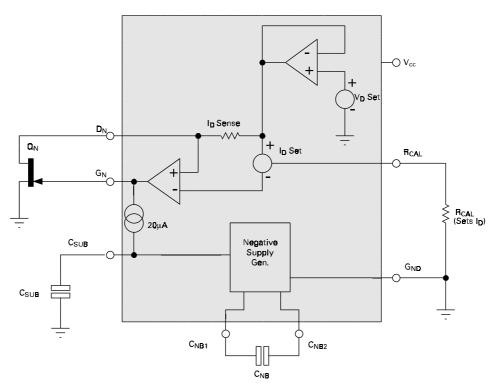

#### **FUNCTIONAL DESCRIPTION**

The ZNBG devices provide all the bias requirements for external FETs, including the generation of the negative supply required for gate biasing, from the single supply voltage.


The diagram above shows a single stage from the ZNBG series. The ZNBG4000/1 contains 4 such stages, the ZNBG6000/1 contains 6. The negative rail generator is common to all devices.

The drain voltage of the external FET  $Q_N$  is set by the ZNBG device to its normal operating voltage. This is determined by the on board  $V_D$  Set reference, for the ZNBG4000/6000 this is nominally 2.2 volts whilst the ZNBG4001/6001 provides nominally 2 volts.

The drain current taken by the FET is monitored by the low value resistor  $I_D$  Sense. The amplifier driving the gate of the FET adjusts the gate voltage of  $Q_N$  so that the drain current taken matches the current called for by an external resistor  $R_{CAL}$ . Both ZNBG devices have the facility to program different drain currents into selected FETs. Two  $R_{CAL}$  inputs are provided. For the ZNBG4000, resistor  $R_{CAL1}$  sets the drain current of FETs 1 and 2, resistor  $R_{CAL2}$  sets the drain current of FETs 3 and 4. For the ZNBG6000, resistor  $R_{CAL2}$  sets the drain current of FETs 1 and 4, resistor  $R_{CAL2}$  sets the drain current of FETs 2, 3, 5 and 6.

Since the FET is a depletion mode transistor, it is usually necessary to drive its gate negative with respect to ground to obtain the required drain current. To provide this capability powered from a single positive supply, the device includes a low current negative supply generator. This generator uses an internal oscillator and two external capacitors,  $C_{NB}$  and  $C_{SUB}$ .

#### TYPICAL APPLICATION CIRCUIT

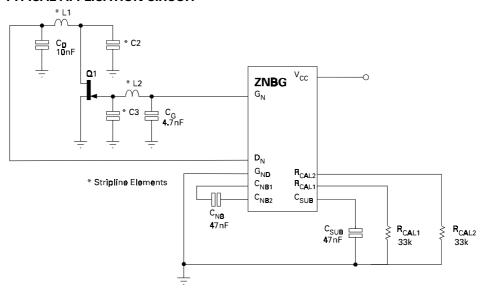

#### **APPLICATIONS INFORMATION**

The above is a partial application circuit for the ZNBG series showing all external components required for appropriate biasing. The bias circuits are unconditionally stable over the full temperature range with the associated FETs and gate and drain capacitors in circuit.

Capacitors  $C_D$  and  $C_G$  ensure that residual power supply and substrate generator noise is not allowed to affect other external circuits which may be sensitive to RF interference. They also serve to suppress any potential RF feedthrough between stages via the ZNBG device. These capacitors are required for all stages used. Values of 10nF and 4.7nF respectively are recommended however this is design dependent and any value between 1nF and 100nF could be used.

The capacitors  $C_{NB}$  and  $C_{SUB}$  are an integral part of the ZNBGs negative supply generator. The negative bias voltage is generated on-chip using an internal oscillator. The required value of capacitors  $C_{NB}$  and  $C_{SUB}$  is 47nF. This generator produces a low current supply of approximately -3 volts. Although this generator is intended purely to bias the external FETs, it can be used to power other external circuits via the  $C_{SUB}$  pin.

Resistors  $R_{CAL1/2}$  sets the drain current at which all external FETs are operated. Both ZNBG devices have the facility to program different drain currents into selected FETs. Two  $R_{CAL}$  inputs are provided. For the ZNBG4000, resistor  $R_{CAL1}$  sets the drain current of FETs 1 and 2, resistor  $R_{CAL2}$  sets the drain current of FETs 3 and 4. For the ZNBG6000, resistor  $R_{CAL1}$  sets the drain current of FETs 1 and 4, resistor  $R_{CAL2}$  sets the drain current of FETs 2, 3, 5 and 6. If the same drain current is required for all FETs on either device then pins  $R_{CAL1}$  and  $R_{CAL2}$  can be wired together and shunted to ground by a single calibration resistor of half normal value.


If any bias control circuit is not required, its related drain and gate connections may be left open circuit without affecting the operation of the remaining bias circuits. If all FETs associated with a current setting resistor are omitted, the particular  $R_{CAL}$  should still be included. The supply current can be reduced, if required, by using a high value  $R_{CAL}$  resistor (e.g. 470k).


#### **APPLICATIONS INFORMATION (Continued)**

The ZNBG devices have been designed to protect the external FETs from adverse operating conditions. With a JFET connected to any bias circuit, the gate output voltage of the bias circuit can not exceed the range -3.5V to 0.7V, under any conditions including powerup and powerdown transients. Should the negative bias generator be shorted or overloaded so that the drain current of the external FETs can no longer be controlled, the drain supply to FETs is shut down to avoid damage to the FETs by excessive drain current.


The following diagrams show the ZNBG4000/1 and ZNBG6000/1 in typical LNB applications. Within each FET gain stage the numbering system indicates how the bias stages relate to the application circuits. This is important when RCAL values are used to set differing drain currents.

#### Dual standard or enhanced LNB block diagram

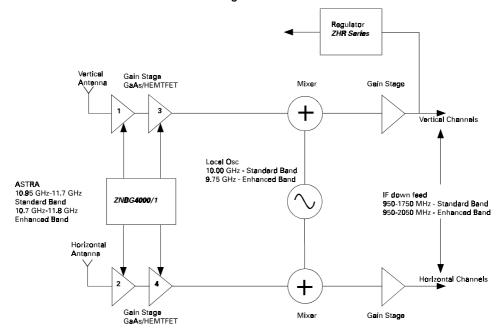


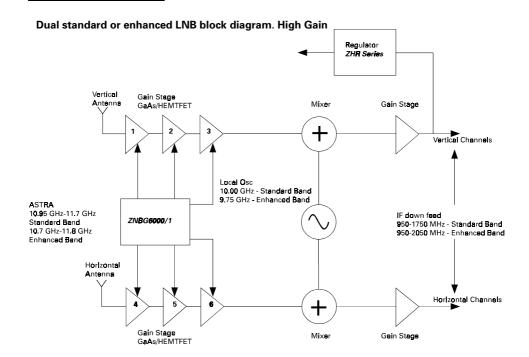

#### **CONNECTION DIAGRAMS**



ZNBG4000 ZNBG4001




ZNBG6000 ZNBG6001

#### **ORDERING INFORMATION**

Part Number	Package	Part Mark
ZNBG4000Q16	QSOP16	ZNBG4000
ZNBG4001Q16	QSOP16	ZNBG4001
ZNBG6000Q20	QSOP20	ZNBG6000
ZNBG6001Q20	QSOP20	ZNBG6001

#### **PACKAGE DIMENSIONS**

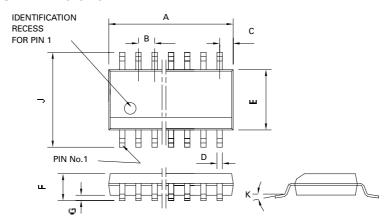

#### QSOP16

PIN	Millimetres		Inches		
	MIN	MAX	MIN	MAX	
Α	4.80	4.90	0.033	0.039	
В	0.635		0.025 NOM		
С	0.177	0.267	0.007	0.011	
D	0.20	0.30	0.008	0.012	
E	3.81	3.99	0.15	0.157	
F	1.35	1.75	0.053	0.069	
G	0.10	0.25	0.004	0.01	
J	5.79	6.20	0.228	0.244	
K	0°	8°	0°	8°	

#### QSOP20

PIN	Millimetres		Inches		
	MIN	MAX	MIN	MAX	
Α	8.55	8.74	0.337	0.344	
В	0.635		0.025 NOM		
С	1.42	1.52	0.056	0.06	
D	0.20	0.30	0.008	0.012	
Е	3.81	3.99	0.15	0.157	
F	1.35	1.75	0.053	0.069	
G	0.10	0.25	0.004	0.01	
J	5.79	6.20	0.228	0.244	
K	0°	8°	0°	8°	



Zetex plc.
Fields New Road, Chadderton, Oldham, OL9-8NP, United Kingdom.
Telephone: (44)161 622 4422 (Sales), (44)161 622 4444 (General Enquiries)
Fax: (44)161 622 4420

Zetex GmbH Streitfeldstraße 19 D-81673 München Germany Telefon: (49) 89 45 49 49 0 Fax: (49) 89 45 49 49 49 Zetex Inc. 47 Mall Drive, Unit 4 Commack NY 11725 USA Telephone: (516) 543-7100 Fax: (516) 864-7630 Zetex (Asia) Ltd. 3510 Metroplaza, Tower 2 Hing Fong Road, Kwai Fong, Hong Kong Telephone:(852) 26100 611 Fax: (852) 24250 494

These are supported by agents and distributors in major countries world-wide ©Zetex plc 1998

Internet:http://www.zetex.com

This publication is issued to provide outline information only which (unless agreed by the Company in writing) may not be used, applied or reproduced for any purpose or form part of any order or contract or be regarded as a representation relating to the products or services concerned. The Company reserves the right to alter without notice the specification, design, price or conditions of supply of any product or service.

## **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Diodes Incorporated:

ZNBG4000Q16TC ZNBG4001Q16TC