

ELECTRICAL CHARACTERISTICS

| AVX PN | V _w (DC) | V _w (AC) | V _R | V _C | I _{VC} | I _L | E _T | I _p | Cap | Freq | Case |
|--------------|---------------------|---------------------|----------------|----------------|-----------------|----------------|----------------|----------------|-------|------|------|
| | Vdc | Vac | V | V | A | µA | J | A | pF | | |
| VC060303A100 | 3.3 | 2.3 | 5.0±20% | 12 | 1 | 100 | 0.1 | 30 | 1450 | K | 0603 |
| VC080503A100 | 3.3 | 2.3 | 5.0±20% | 12 | 1 | 100 | 0.1 | 40 | 1400 | K | 0805 |
| VC080503C100 | 3.3 | 2.3 | 5.0±20% | 12 | 1 | 100 | 0.3 | 120 | 5000 | K | 0805 |
| VC120603A100 | 3.3 | 2.3 | 5.0±20% | 12 | 1 | 100 | 0.1 | 40 | 1250 | K | 1206 |
| VC120603D100 | 3.3 | 2.3 | 5.0±20% | 12 | 1 | 100 | 0.4 | 150 | 4700 | K | 1206 |
| VC040205X150 | 5.6 | 4.0 | 8.5±20% | 18 | 1 | 35 | 0.05 | 20 | 175 | M | 0402 |
| VC060305A150 | 5.6 | 4.0 | 8.5±20% | 18 | 1 | 35 | 0.1 | 30 | 750 | K | 0603 |
| VC080505A150 | 5.6 | 4.0 | 8.5±20% | 18 | 1 | 35 | 0.1 | 40 | 1100 | K | 0805 |
| VC080505C150 | 5.6 | 4.0 | 8.5±20% | 18 | 1 | 35 | 0.3 | 120 | 3000 | K | 0805 |
| VC120605A150 | 5.6 | 4.0 | 8.5±20% | 18 | 1 | 35 | 0.1 | 40 | 1200 | K | 1206 |
| VC120605D150 | 5.6 | 4.0 | 8.5±20% | 18 | 1 | 35 | 0.4 | 150 | 3000 | K | 1206 |
| VC040209X200 | 9.0 | 6.4 | 12.7±15% | 22 | 1 | 25 | 0.05 | 20 | 175 | M | 0402 |
| VC060309A200 | 9.0 | 6.4 | 12.7±15% | 22 | 1 | 25 | 0.1 | 30 | 550 | K | 0603 |
| VC080509A200 | 9.0 | 6.4 | 12.7±15% | 22 | 1 | 25 | 0.1 | 40 | 750 | K | 0805 |
| VC080512A250 | 12.0 | 8.5 | 16±15% | 27 | 1 | 25 | 0.1 | 40 | 525 | K | 0805 |
| VC040214X300 | 14.0 | 10.0 | 18.5±12% | 32 | 1 | 15 | 0.05 | 20 | 85 | K | 0402 |
| VC060314A300 | 14.0 | 10.0 | 18.5±12% | 32 | 1 | 15 | 0.1 | 30 | 350 | K | 0603 |
| VC080514A300 | 14.0 | 10.0 | 18.5±12% | 32 | 1 | 15 | 0.1 | 40 | 325 | K | 0805 |
| VC080514C300 | 14.0 | 10.0 | 18.5±12% | 32 | 1 | 15 | 0.3 | 120 | 900 | K | 0805 |
| VC120614A300 | 14.0 | 10.0 | 18.5±12% | 32 | 1 | 15 | 0.1 | 40 | 600 | K | 1206 |
| VC120614D300 | 14.0 | 10.0 | 18.5±12% | 32 | 1 | 15 | 0.4 | 150 | 1050 | K | 1206 |
| VC121016J390 | 16.0 | 13.0 | 25.5±10% | 40 | 2.5 | 10 | 1.6 | 500 | 3100 | K | 1210 |
| VG181216P390 | 16.0 | 11.0 | 24.5±10% | 40 | 5 | 15 | 2.9 | 1000 | 7000 | K | 1812 |
| VG181216P400 | 16.0 | 11.0 | 24.5±10% | 42 | 5 | 10 | 2.9 | 1000 | 5000 | K | 1812 |
| VG222016Y400 | 16.0 | 11.0 | 24.5±10% | 42 | 10 | 10 | 7.2 | 1500 | 13000 | K | 2220 |
| VC040218X400 | 18.0 | 13.0 | 25.5±10% | 42 | 1 | 10 | 0.05 | 20 | 65 | M | 0402 |
| VC060318A400 | 18.0 | 13.0 | 25.5±10% | 42 | 1 | 10 | 0.1 | 30 | 150 | K | 0603 |
| VC080518A400 | 18.0 | 13.0 | 25.5±10% | 42 | 1 | 10 | 0.1 | 30 | 225 | K | 0805 |
| VC080518C400 | 18.0 | 13.0 | 25.5±10% | 42 | 1 | 10 | 0.3 | 100 | 550 | K | 0805 |
| VC120618A400 | 18.0 | 13.0 | 25.5±10% | 42 | 1 | 10 | 0.1 | 30 | 350 | K | 1206 |
| VC120618D400 | 18.0 | 13.0 | 25.5±10% | 42 | 1 | 10 | 0.4 | 150 | 900 | K | 1206 |
| VC120618E380 | 18.0 | 13.0 | 25.5±10% | 38 | 1 | 15 | 0.5 | 200 | 930 | K | 1206 |
| VG121018J380 | 18.0 | 14.0 | 22±10% | 38 | 2.5 | 15 | 1.5 | 400 | 2300 | K | 1210 |
| VC121018J390 | 18.0 | 13.0 | 25.5±10% | 42 | 5 | 10 | 1.6 | 500 | 3100 | K | 1210 |
| VG181218P380 | 18.0 | 14 | 22±10% | 38 | 5 | 15 | 2.3 | 800 | 5000 | K | 1218 |
| VG181218P440 | 18.0 | 14.0 | 27.5±10% | 44 | 5 | 15 | 2.9 | 800 | 5000 | K | 1812 |
| VG222018W380 | 18.0 | 14.0 | 22±10% | 38 | 10 | 15 | 5.8 | 1200 | 18000 | K | 2220 |
| VG121022R440 | 22.0 | 17.0 | 27±10% | 44 | 2.5 | 15 | 1.7 | 400 | 1600 | K | 1210 |
| VG222022Y440 | 22.0 | 17.0 | 27±10% | 44 | 10 | 15 | 7.2 | 1200 | 18000 | K | 2220 |
| VG222022Y490 | 22.0 | 17.0 | 30±10% | 49 | 10 | 15 | 6.8 | 1200 | 12000 | K | 2220 |
| VC060326A580 | 26.0 | 18.0 | 34.5±10% | 60 | 1 | 10 | 0.1 | 30 | 155 | K | 0603 |
| VC080526A580 | 26.0 | 18.0 | 34.5±10% | 60 | 1 | 10 | 0.1 | 30 | 120 | K | 0805 |
| VC080526C580 | 26.0 | 18.0 | 34.5±10% | 60 | 1 | 10 | 0.3 | 100 | 250 | K | 0805 |
| VC120626D580 | 26.0 | 18.0 | 34.5±10% | 60 | 1 | 10 | 0.4 | 120 | 500 | K | 1206 |
| VC120626F540 | 26.0 | 20.0 | 33.0±10% | 54 | 1 | 15 | 0.7 | 200 | 600 | K | 1206 |
| VC121026H560 | 26.0 | 18.0 | 34.5±10% | 60 | 5 | 10 | 1.2 | 300 | 2150 | K | 1210 |
| VG121026S540 | 26.0 | 20.0 | 33±10% | 54 | 2.5 | 15 | 1.9 | 400 | 1600 | K | 1210 |
| VG181226P540 | 26.0 | 20 | 35±10% | 54 | 5 | 15 | 3 | 800 | 3000 | K | 1812 |

ELECTRICAL CHARACTERISTICS

| AVX PN | V _w (DC) | V _w (AC) | V _B | V _c | I _{vc} | I _L | E _T | I _p | Cap | Freq | Case |
|--------------|---------------------|---------------------|----------------|----------------|-----------------|----------------|----------------|----------------|-------|------|------|
| | Vdc | Vac | V | V | A | µA | J | A | pF | | |
| VG181226P570 | 26.0 | 23.0 | 35.0±10% | 57 | 5 | 15 | 2.5 | 600 | 3000 | K | 1812 |
| VG181226P540 | 26.0 | 20.0 | 35.0±10% | 54 | 5 | 15 | 3.0 | 800 | 3000 | K | 1812 |
| VG222026Y540 | 26.0 | 20.0 | 33.0±10% | 54 | 10 | 15 | 7.8 | 1200 | 11000 | K | 2220 |
| VG222026Y570 | 26.0 | 23.0 | 35.0±10% | 57 | 10 | 15 | 6.8 | 1100 | 7000 | K | 2220 |
| VG322026N570 | 26.0 | 20.0 | 33.0±10% | 57 | 10 | 15 | 1.1 | 400 | 5500 | K | 3220 |
| VC060330A650 | 30.0 | 21.0 | 41.0±10% | 67 | 1 | 10 | 0.1 | 30 | 125 | K | 0603 |
| VC080530A650 | 30.0 | 21.0 | 41.0±10% | 67 | 1 | 10 | 0.1 | 30 | 90 | M | 0805 |
| VC080530C650 | 30.0 | 21.0 | 41.0±10% | 67 | 1 | 10 | 0.3 | 80 | 250 | K | 0805 |
| VC120630D650 | 30.0 | 21.0 | 41.0±10% | 67 | 1 | 10 | 0.4 | 120 | 400 | K | 1206 |
| VC121030G620 | 30.0 | 21.0 | 41.0±10% | 67 | 5 | 10 | 0.9 | 220 | 1750 | K | 1210 |
| VC121030H620 | 30.0 | 21.0 | 41.0±10% | 67 | 5 | 10 | 1.2 | 280 | 1850 | K | 1210 |
| VC121030S620 | 30.0 | 21.0 | 41.0±10% | 67 | 5 | 10 | 1.9 | 300 | 1500 | K | 1210 |
| VC080531C650 | 31.0 | 25.0 | 39.0±10% | 65 | 1 | 10 | 0.3 | 80 | 250 | K | 0805 |
| VC120631M650 | 31.0 | 25.0 | 39.0±10% | 65 | 1 | 15 | 1.0 | 200 | 500 | K | 1206 |
| VG121031R650 | 31.0 | 25.0 | 39.0±10% | 65 | 2.5 | 15 | 1.7 | 300 | 1200 | K | 1210 |
| VG181231P650 | 31.0 | 25.0 | 39.0±10% | 65 | 5 | 15 | 3.7 | 800 | 2600 | K | 1812 |
| VG222031Y650 | 31.0 | 25.0 | 39.0±10% | 65 | 10 | 15 | 9.6 | 1200 | 6100 | K | 2220 |
| VC080538C770 | 38.0 | 30.0 | 47.0±10% | 77 | 1 | 10 | 0.3 | 80 | 200 | K | 0805 |
| VC120638N770 | 38.0 | 30.0 | 47.0±10% | 77 | 1 | 15 | 1.1 | 200 | 400 | K | 1206 |
| VG121038S770 | 38.0 | 30.0 | 47.0±10% | 77 | 2.5 | 15 | 2.0 | 400 | 1000 | K | 1210 |
| VG181238U770 | 38.0 | 30.0 | 47.0±10% | 77 | 5 | 15 | 4.2 | 800 | 1300 | K | 1812 |
| VG222038Y770 | 38.0 | 30.0 | 47.0±10% | 77 | 10 | 15 | 12 | 2000 | 4200 | K | 2220 |
| VG322038J920 | 38.0 | 30.0 | 47.0±10% | 92 | 10 | 15 | 1.5 | 400 | 2600 | K | 3220 |
| VC120642L800 | 42.0 | 32.0 | 51.0±10% | 80 | 1 | 15 | 0.8 | 180 | 600 | K | 1206 |
| VC120645K900 | 45.0 | 35.0 | 56.0±10% | 90 | 1 | 15 | 0.6 | 200 | 260 | K | 1206 |
| VG121045S900 | 45.0 | 35.0 | 56.0±10% | 90 | 2.5 | 15 | 2 | 300 | 800 | K | 1210 |
| VG181245U900 | 45.0 | 35.0 | 56.0±10% | 90 | 5 | 15 | 4.0 | 500 | 1200 | K | 1812 |
| VG222045Y900 | 45.0 | 35.0 | 56.0±10% | 90 | 10 | 15 | 12 | 1000 | 5000 | K | 2220 |
| VC120648D101 | 48.0 | 34.0 | 62.0±10% | 100 | 1 | 10 | 0.4 | 100 | 225 | K | 1206 |
| VC121048G101 | 48.0 | 34.0 | 62.0±10% | 100 | 5 | 10 | 0.9 | 220 | 450 | K | 1210 |
| VC121048H101 | 48.0 | 34.0 | 62.0±10% | 100 | 5 | 10 | 1.2 | 250 | 500 | K | 1210 |
| VC120656F111 | 56.0 | 40.0 | 68.0±10% | 110 | 1 | 15 | 0.7 | 100 | 180 | K | 1206 |
| VG121056P111 | 56.0 | 40.0 | 68.0±10% | 110 | 2.5 | 15 | 2.3 | 250 | 500 | K | 1210 |
| VG181256U111 | 56.0 | 40.0 | 68.0±10% | 110 | 5 | 15 | 4.8 | 500 | 800 | K | 1812 |
| VG222056Y111 | 56.0 | 40.0 | 68.0±10% | 110 | 10 | 15 | 9 | 1000 | 2000 | K | 2220 |
| VC121060J121 | 60.0 | 42.0 | 76.0±10% | 120 | 5 | 10 | 1.5 | 250 | 400 | K | 1210 |
| VC120665L131 | 65.0 | 50.0 | 82.0±10% | 135 | 1 | 15 | 0.8 | 100 | 250 | K | 1206 |
| VC120665M131 | 65.0 | 50.0 | 82.0±10% | 135 | 1 | 15 | 1.0 | 150 | 250 | K | 1206 |
| VG121065P131 | 65.0 | 50.0 | 82.0±10% | 135 | 2.5 | 15 | 2.7 | 350 | 600 | K | 1210 |
| VG181265U131 | 65.0 | 50.0 | 82.0±10% | 135 | 5 | 15 | 4.5 | 400 | 600 | K | 1812 |
| VG222065Y131 | 65.0 | 50.0 | 82.0±10% | 135 | 10 | 15 | 6.5 | 800 | 3000 | K | 2220 |
| VC121085S151 | 85.0 | 60.0 | 100±10% | 150 | 1 | 35 | 2.0 | 250 | 275 | K | 1210 |
| VG181285U161 | 85.0 | 60.0 | 100±10% | 165 | 5 | 15 | 4.5 | 400 | 500 | K | 1812 |
| VG222085Y161 | 85.0 | 60.0 | 100±10% | 165 | 10 | 15 | 6.8 | 800 | 1500 | K | 2220 |

V_w (DC) DC Working Voltage (V)

V_w (AC) AC Working Voltage (V)

V_B Typical Breakdown Voltage (V @ 1mA_{DC})

V_c Clamping Voltage (V @ I_{vc})

I_{vc} Test Current for V_c (A, 8x20µS)


I_L Maximum Leakage Current at the Working Voltage (µA)

E_T Transient Energy Rating (J, 10x1000µS)

I_p Peak Current Rating (A, 8x20µS)

Cap Typical Capacitance (pF) @ frequency specified and 0.5 V_{RMS}

Freq Frequency at which capacitance is measured (K = 1kHz, M = 1MHz)

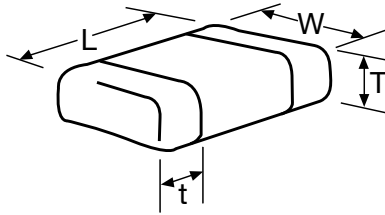


DIMENSIONS:

mm (inches)

| AVX Style | | 0402 | 0603 | 0805 | 1206 | 1210 | 1812 | 2220 | 3220 |
|-------------------|----------|----------------------------|----------------------------|----------------------------|--|----------------------------|----------------------------|----------------------------|----------------------------|
| (L) Length | mm (in.) | 1.00±0.10 (0.040±0.004) | 1.60±0.15 (0.063±0.006) | 2.01±0.20 (0.079±0.008) | 3.20±0.20 (0.126±0.008) | 3.20±0.20 (0.126±0.008) | 4.50±0.30 (0.177±0.012) | 5.70±0.40 (0.224±0.016) | 8.20±0.40 (0.323±0.016) |
| (W) Width | mm (in.) | 0.50±0.10 (0.020±0.004) | 0.80±0.15 (0.031±0.006) | 1.25±0.20 (0.049±0.008) | 1.60±0.20 (0.063±0.008) | 2.49±0.20 (0.098±0.008) | 3.20±0.30 (0.126±0.012) | 5.00±0.40 (0.197±0.016) | 5.00±0.40 (0.197±0.016) |
| (T) Max Thickness | mm (in.) | 0.6 (0.024) | 0.9 (0.035) | 1.02 (0.040) | 1.02 (0.040) 1.27 (0.050) ¹⁾ 1.70 (0.067) ²⁾ | 1.70 (0.067) | 2.00 (0.080) | 2.50 (0.098) | 2.50 max. (0.098 max.) |
| (t) Land Length | mm (in.) | 0.25±0.15 (0.010±0.006) | 0.35±0.15 (0.014±0.006) | 0.71 max. (0.028 max.) | 0.94 max. (0.037 max.) | 1.14 max. (0.045 max.) | 1.00 max. (0.039 max.) | 1.00 max. (0.039 max.) | 1.30 max. (0.051 max.) |

1) Applicable for: VC120618E380

2) Applicable for: VC120626F540, VC120631M650, VC120638N770, VC120642L800, VC120645K900, VC120656F111, VC120660M131

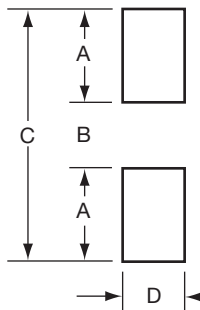

SOLDERING PAD:


mm (inches)

| Pad Layout | 0402 | 0603 | 0805 | 1206 | 1210 | 1812 | 2220 | 3220 |
|------------|--------------|--------------|--------------|--------------|--------------|--------------|--------------|---------------|
| A | 1.61 (0.024) | 0.89 (0.035) | 1.02 (0.040) | 1.02 (0.040) | 1.02 (0.040) | 1.00 (0.039) | 1.00 (0.039) | 2.21 (0.087) |
| B | 1.51 (0.020) | 0.76 (0.030) | 1.02 (0.040) | 2.03 (0.080) | 2.03 (0.080) | 3.60 (0.142) | 4.60 (0.18) | 5.79 (0.228) |
| C | 1.70 (0.067) | 2.54 (0.100) | 3.05 (0.120) | 4.06 (0.160) | 4.06 (0.160) | 5.60 (0.220) | 6.60 (0.26) | 10.21 (0.402) |
| D | 1.51 (0.020) | 0.76 (0.030) | 1.27 (0.050) | 1.65 (0.065) | 2.54 (0.100) | 3.00 (0.118) | 5.00 (0.20) | 5.50 (0.217) |

TYPICAL PERFORMANCE CURVES (0402 CHIP SIZE)

VOLTAGE/CURRENT CHARACTERISTICS


Multilayer construction and improved grain structure result in excellent transient clamping characteristics up to 20 amps peak current, while maintaining very low leakage currents under DC operating conditions. The VI curves below show the voltage/current characteristics for the 5.6V, 9V, 14V, 18V and low capacitance StaticGuard parts with currents ranging from parts of a micro amp to tens of amps.

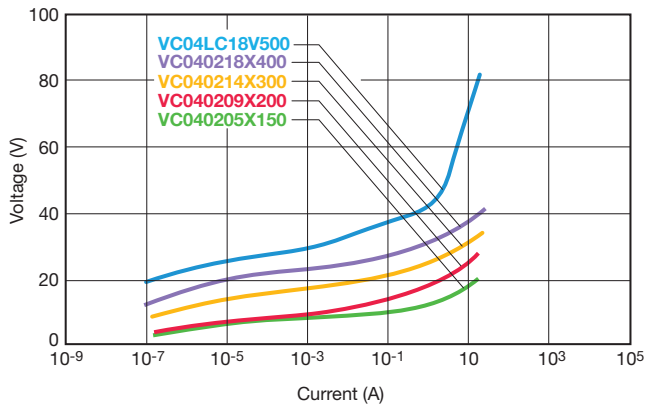


PULSE DEGRADATION

Traditionally varistors have suffered degradation of electrical performance with repeated high current pulses resulting in decreased breakdown voltage and increased leakage current. It has been suggested that irregular intergranular boundaries and bulk material result in restricted current paths and other non-Schottky barrier paralleled conduction paths in the ceramic. Repeated pulsing of TransGuard® transient voltage suppressors with 150Amp peak 8 x 20µs waveforms shows negligible degradation in breakdown voltage and minimal increases in leakage current.


ESD TEST OF 0402 PARTS

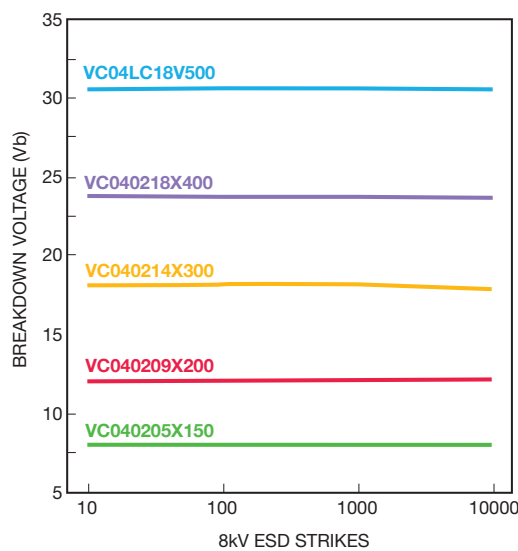

PEAK POWER VS PULSE DURATION

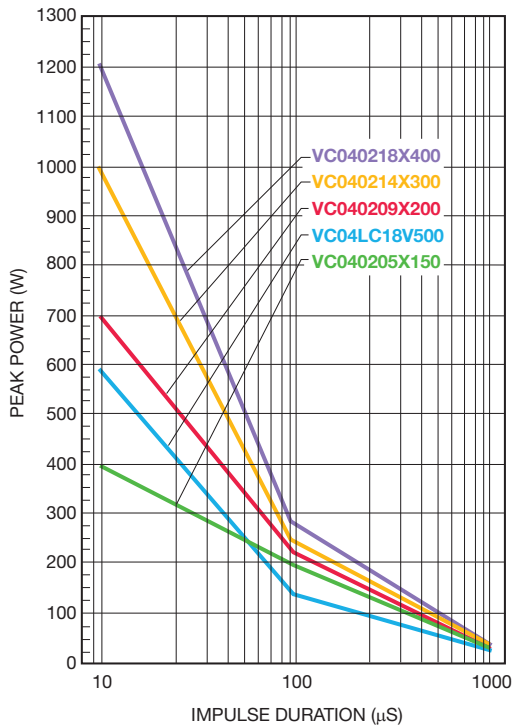

INSERTION LOSS CHARACTERISTICS

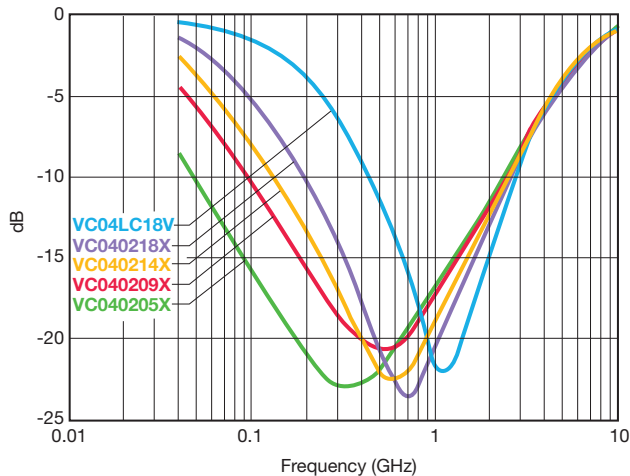


TYPICAL PERFORMANCE CURVES (0603, 0805, 1206 & 1210 CHIP SIZES)


VOLTAGE/CURRENT CHARACTERISTICS

Multilayer construction and improved grain structure result in excellent transient clamping characteristics up to 500 amps peak current, depending on case size and energy rating, while maintaining very low leakage currents under DC operating conditions. The VI curve below shows the voltage/current characteristics for the 3.3V, 5.6V, 12V, 14V, 18V, 26V, 30V, 48V and 60VDC parts with currents ranging from parts of a micro amp to tens of amps.


VI Curves - 3.3V and 5.6V Products

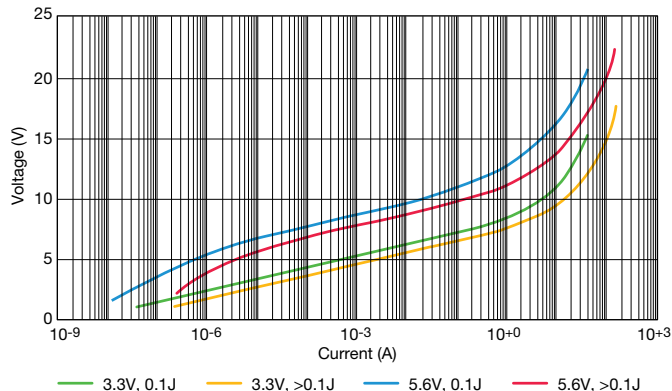


VI Curves - 9V, 12V, and 14V Products

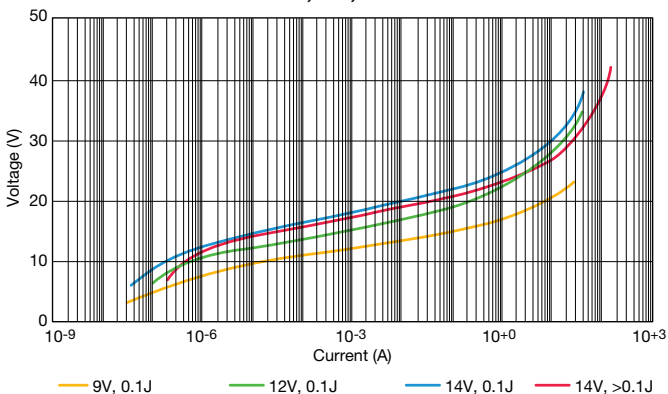


VI Curves - 18V and 26V Products

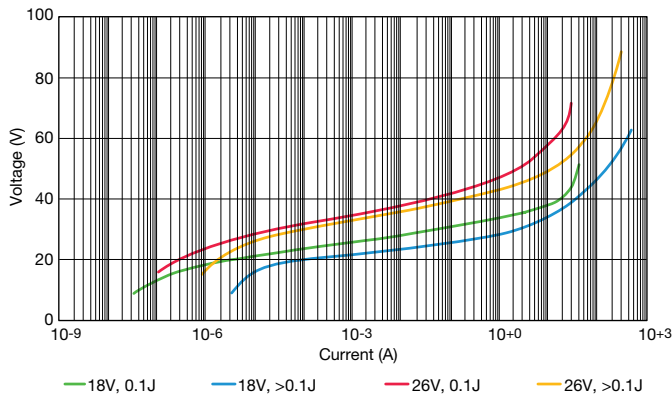

VI Curves - 30V, 48V, and 60V Products

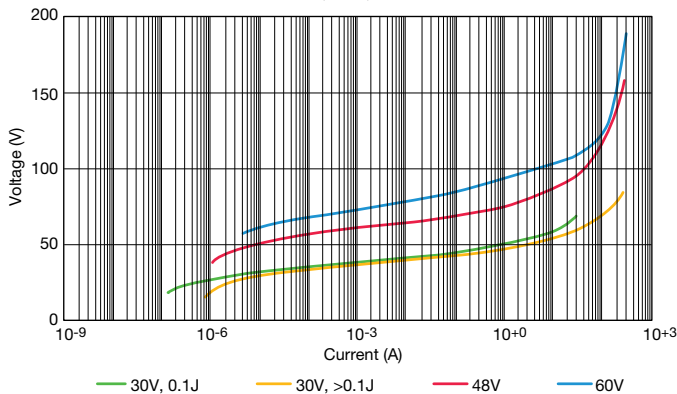


VI Curve - 85V Product

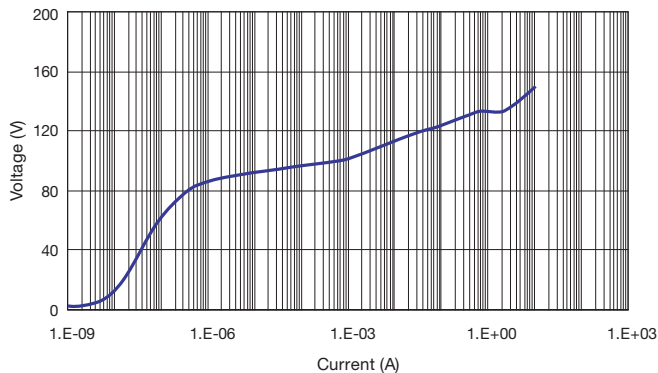


TYPICAL PERFORMANCE CURVES (0603, 0805, 1206 & 1210 CHIP SIZES)


TYPICAL PULSE RATING CURVE
 3.3V MULTILAYER TRANSGUARD®

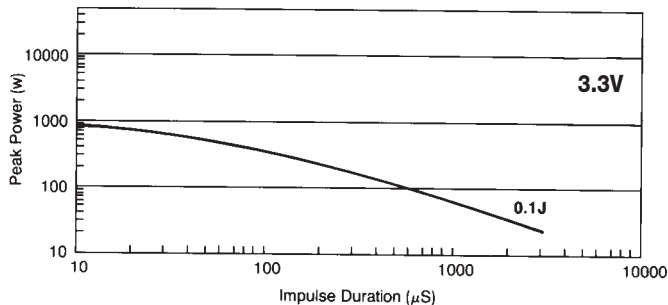


TYPICAL PULSE RATING CURVE
 26V MULTILAYER TRANSGUARD®

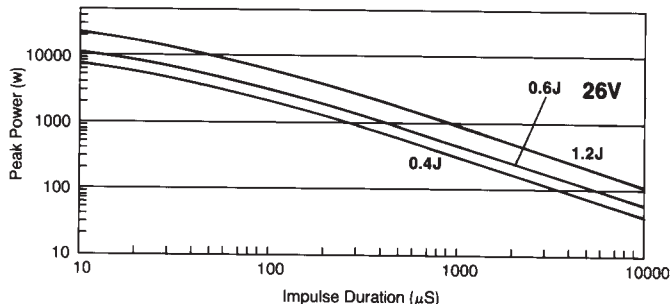


TYPICAL PULSE RATING CURVE
 5.6V MULTILAYER TRANSGUARD®

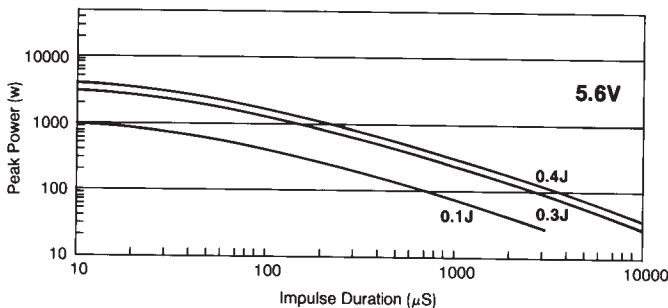


TYPICAL PULSE RATING CURVE
 30V MULTILAYER TRANSGUARD®

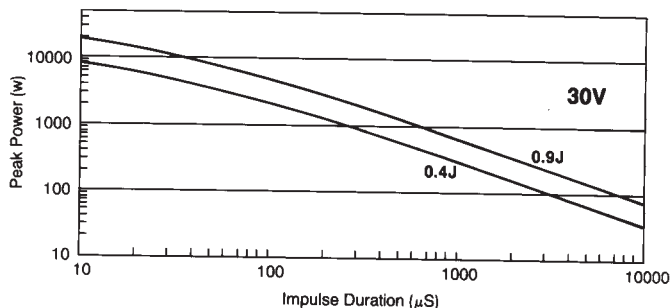


TYPICAL PULSE RATING CURVE
 14V MULTILAYER TRANSGUARD®

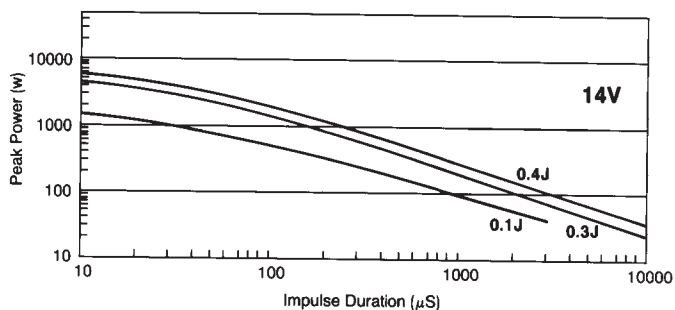


TYPICAL PULSE RATING CURVE
 48V MULTILAYER TRANSGUARD®

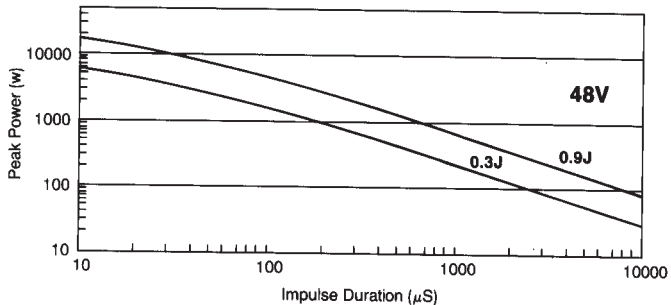

TYPICAL PULSE RATING CURVE
 18V MULTILAYER TRANSGUARD®

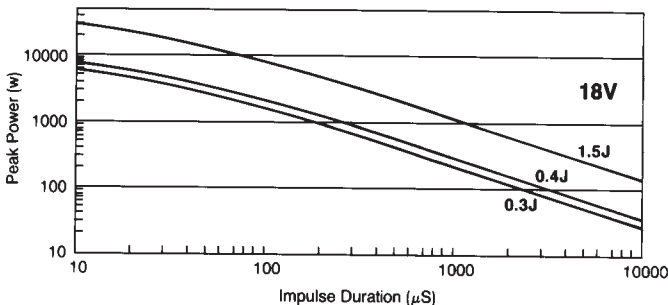







TYPICAL PULSE RATING CURVE
 60V MULTILAYER TRANSGUARD®

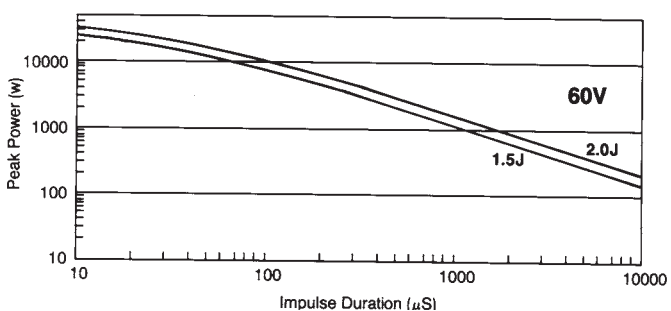

TYPICAL PERFORMANCE CURVES (0603, 0805, 1206 & 1210 CHIP SIZES)

TEMPERATURE CHARACTERISTICS

TransGuard® suppressors are designed to operate over the full temperature range from -55°C to +125°C. This operating temperature range is for both surface mount and axial leaded products.

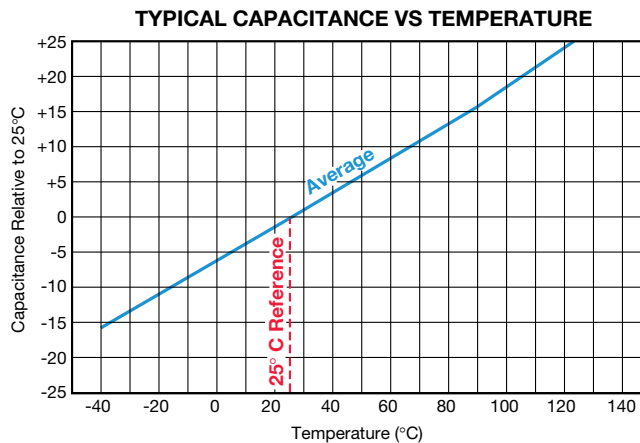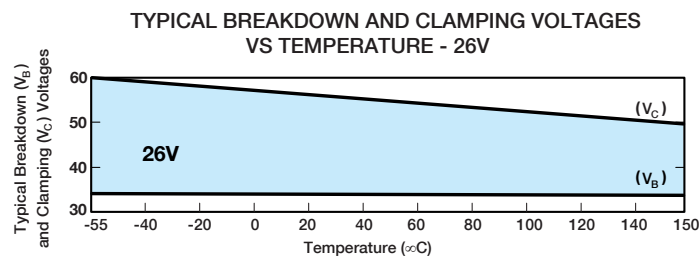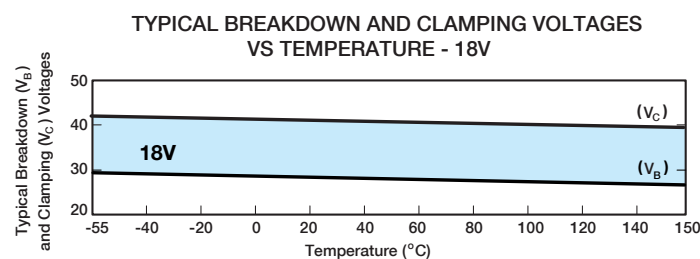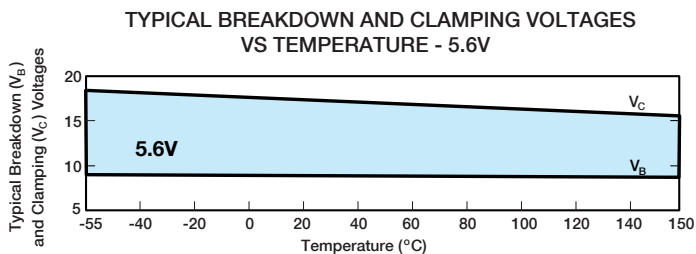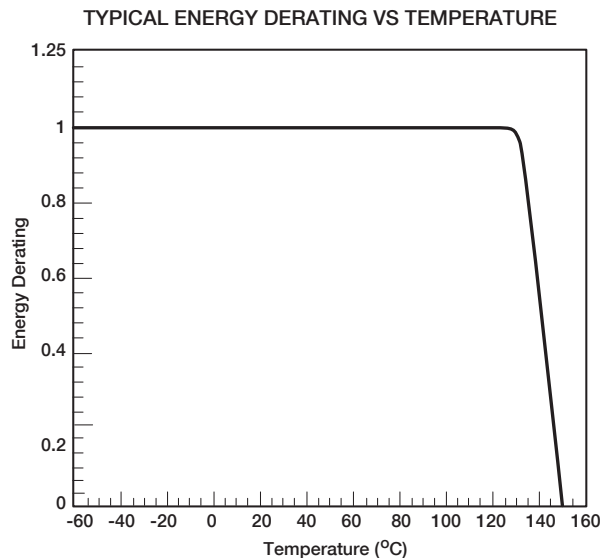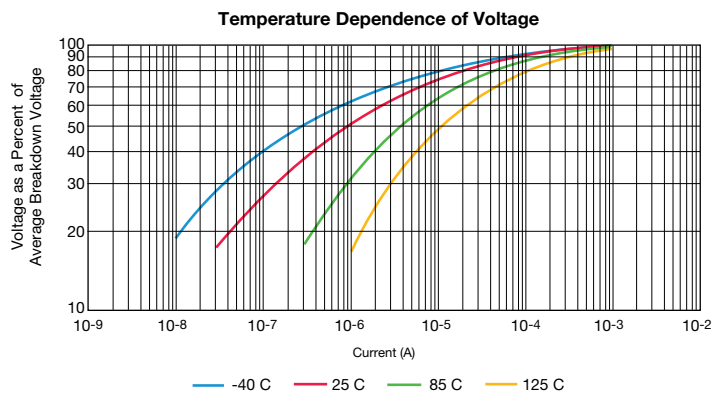

TYPICAL PERFORMANCE CURVES (0603, 0805, 1206 & 1210 CHIP SIZES)
PULSE DEGRADATION

Traditionally varistors have suffered degradation of electrical performance with repeated high current pulses resulting in decreased breakdown voltage and increased leakage current. It has been suggested that irregular intergranular boundaries and bulk material result in restricted current paths and other non-Schottky barrier paralleled conduction paths in the ceramic. Repeated pulsing of both 5.6 and 14V TransGuard® transient voltage

suppressors with 150 Amp peak 8 x 20µS waveforms shows negligible degradation in breakdown voltage and minimal increases in leakage current. The plots of typical breakdown voltage vs number of 150A pulses are shown below.

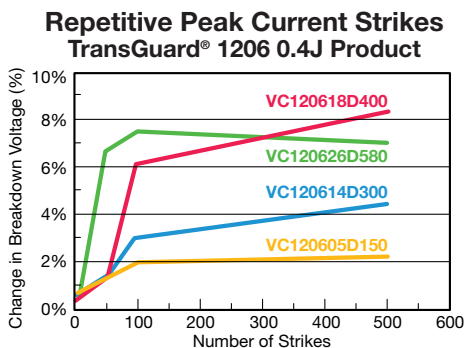


Figure 1

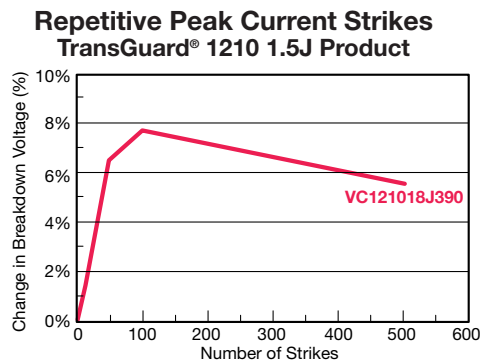


Figure 3

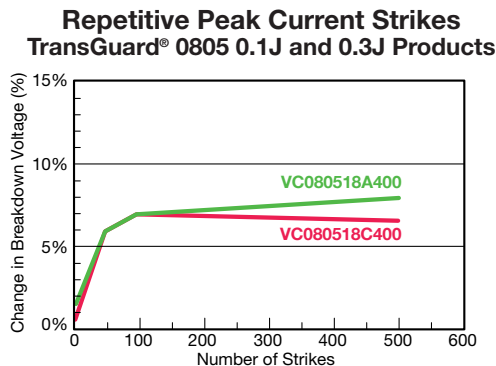


Figure 2




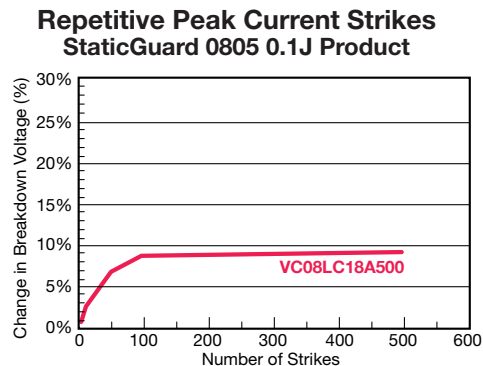


Figure 4

CAPACITANCE/FREQUENCY CHARACTERISTICS

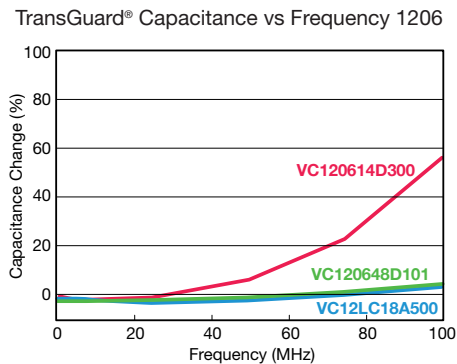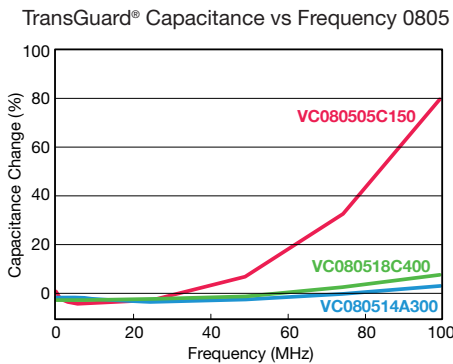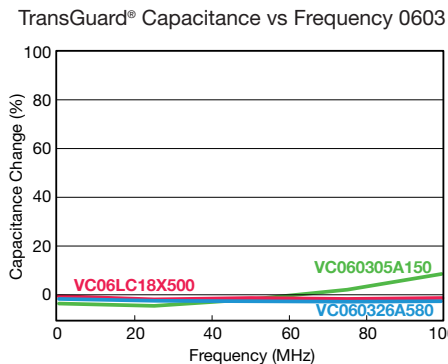

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Kyocera AVX:

[VC121048G101DP](#) [VC080530A650RP](#) [VC060303A100RP](#) [VC060303A100DP](#) [VC120630D650DP](#)
[VC080526C580DP](#) [VC060309A200RP](#) [VC060309A200DP](#) [VC121018J390DP](#) [VC040205X150WP](#)
[VC040205X150RP](#) [VC080530A650DP](#) [VC120618A400DP](#) [VC080518A400DP](#) [VC080518A400RP](#)
[VC060318A400RP](#) [VC060318A400DP](#) [VC080505A150DP](#) [VC080514A300DP](#) [VC080505A150TP](#) [VC080505A150RP](#)
[VC080514A300RP](#) [VC120605D150DP](#) [VC120605D150RP](#) [VC040209X200RP](#) [VC040209X200WP](#)
[VC120603A100DP](#) [VC060305A150DP](#) [VC121026H560RP](#) [VC121026H560DP](#) [VC060305A150RP](#)
[VC080505C150DP](#) [VC080514C300DP](#) [VC080505C150RP](#) [VC040214X300WP](#) [VC121030G620DP](#)
[VC121030H620DP](#) [VC121030H620RP](#) [VC060314A300DP](#) [VC080518C400DP](#) [VC080509A200DP](#)
[VC060314A300RP](#) [VC040214X300RP](#) [VC120614D300RP](#) [VC120614D300DP](#) [VC121048H101DP](#)
[VC120626D580DP](#) [VC120618D400DP](#) [VC120603D100DP](#) [VC120618D400RP](#) [VC040218X400RP](#)
[VC120605A150DP](#) [VC120605A150RP](#) [VC080503A100DP](#) [VC060326A580DP](#) [VC121060J121DP](#) [VC060330A650DP](#)
[VC080503C100DP](#) [VC120630D650RP](#) [VC120648D101DP](#) [VC120648D101RP](#) [VC080512A250DP](#)
[VC080512A250TP](#) [VC120614A300DP](#) [VC080518C400RP](#) [VC080526A580DP](#) [VC181245U900DP](#) [VC120626F540RP](#)
[VC120656F111RP](#) [VC120638N770RP](#) [VC120656F111DP](#) [VC120631M650RP](#) [VC121038S770RP](#)
[VC120645K900RP](#) [VC120665L131RP](#) [VC120665L131DP](#) [VC181226P540DP](#) [VC181238U770DP](#) [VC120618E380RP](#)
[VC181256U111RP](#) [VC040218X400WP](#) [VC120638N770DP](#) [VC060326A580RP](#) [VC060330A650RP](#)
[VC120614A300RP](#) [VC121018J390TP](#) [VC121060J121RP](#) [VC060303A100TP](#) [VC080503A100RP](#) [VC080503C100RP](#)
[VC080505C150TP](#) [VC080509A200RP](#) [VC080512A250RP](#) [VC080514C300RP](#) [VC080518A400TP](#)
[VC080518C400TP](#) [VC080526A580RP](#) [VC080526C580RP](#) [VC120603A100RP](#) [VC120603A100TP](#)