AQ18A Series Characteristics¹

WWW.PHIHONG.COM

Input:

AC Input Voltage Rating

100 to 240V AC

AC Input Voltage Range

90 to 264V AC

AC Input Current

0.5A(RMS) max at 100V AC input

Leakage Current

100uA max

Input Power Saving²

≤75mW at no load at 230VAC/50Hz

Output:

Efficiency

DOE Level VI

Hold-up Time

3mS min at 115VAC/60Hz

Environmental:

Temperature

Operation 0°C to $+40^{\circ}\text{C}$ Non-operation -30°C to $+70^{\circ}\text{C}$

Relative Humidity 10 to 90%

Emissions

FCC Class B

EN55032 Class B

Immunity

ESD: EN61000-4-2

RS: EN61000-4-3 EFT: EN61000-4-4

Surge: EN61000-4-5

CS: EN61000-4-6

MS: EN61000-4-8 Dip: EN61000-4-11

Dielectric Withstand (Hi-pot) Test

Pri. to Sec. 3000VAC 3mA for 1 Minute

Insulation Resistance

Pri to Sec. >100M ohm at 500VDC

FEATURES:

Over-Voltage Protection

6.25V max for 5V; 11.25V max for 9V; 15V max for

12V; 18.75V max for 15V

Over-Current Protection

Auto-recovery. 4.05A max for 5Vdc; 2.7A max for 9Vdc; 2.025A max for 12Vdc; 1.62A max for

15Vdc

Over-Temperature Protection

Latch off function. Case temperature shall not

exceed 95°C

Short-Circuit Protection

Auto-recovery

DC Output Connector


USB Type-C receptacle


Notes:

- 1. The characteristics defined are at ambient temperature of 25°C unless otherwise specified
- 2. After 15 minutes warm-up


Dimension Diagram Unit: mm



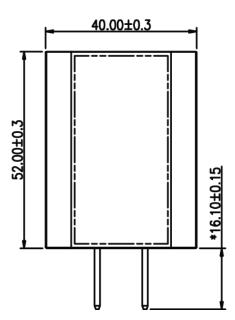

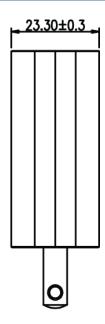

USB Cables – Sold Separately

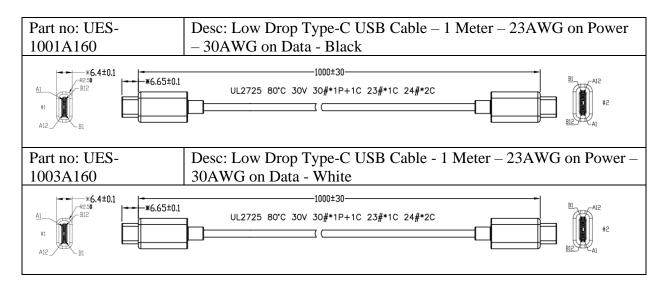



Supplier's Declaration of Conformity 47 CFR § 2.1077 Compliance Information

Phihong USA Corporation 47800 Fremont Boulevard Fremont, CA 94538 Telephone: (510) 445-0100

www.phihong.com

This device complies with/The devices in this product series comply with part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) This device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Phihong:

AQ18A-59CFA-H AQ18E-59CFA-H