
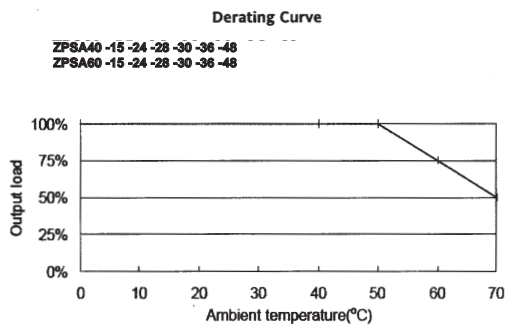


Model Selector

Model	Output (V)	Adjustment Range (V)	Maximum Output (A)	Peak Load (A)(4)	Output Power (W)	Efficiency (%)
ZPSA40-3R3	3.3	-	6.0	7.2	20	74
ZPSA60-3R3	3.3	-	8.0	8.5	26	74
ZPSA40-5	5	-	6.0	7.2	30	79
ZPSA60-5	5	-	8.0	9.0	40	79
ZPSA40-9	9	-	4.45	5.34	40	83
ZPSA60-9	9	-	6.67	8.0	60	83
ZPSA40-12	12	-	3.34	4.0	40	85
ZPSA60-12	12	-	5.0	6.0	60	85
ZPSA40-15	15	-	2.67	3.2	40	85
ZPSA60-15	15	-	4.0	4.8	60	85
ZPSA40-24	24	-	1.67	2.0	40	86
ZPSA60-24	24	-	2.5	3.0	60	86
ZPSA40-28	28	-	1.43	1.7	40	86
ZPSA60-28	28	-	2.14	2.6	60	86
ZPSA40-30	30	-	1.33	1.6	40	86
ZPSA60-30	30	-	2.0	2.4	60	86
ZPSA40-36	36	-	1.11	1.33	40	87
ZPSA60-36	36	-	1.67	2.0	60	86
ZPSA40-48	48	-	0.834	1.0	40	87
ZPSA60-48	48	-	1.25	1.5	60	87


(4) Average not to exceed max power, <30s, 10% duty cycle

Derating Curve

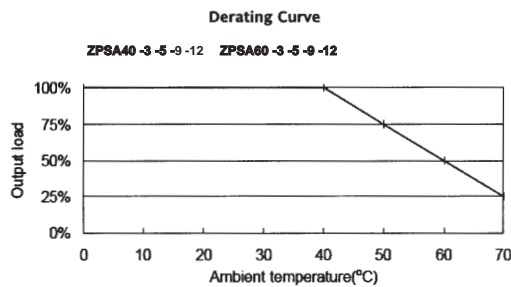

Outline Drawings

All Dimensions are in inches[mm]
Tolerances : XX±0.02[.XX±.5] unless otherwise noted

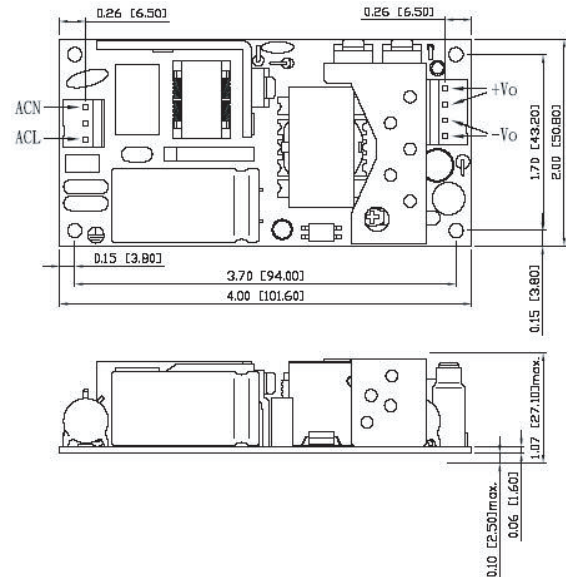

Other Industrial Products

SC40/60	40 to 80W, 3x5", 1 - 3 outputs
NV175	175W, 3x5", 1-5 outputs
ZWS	5 to 240W, single output
KPSA	5 to 15W, pcb mount
ZPD, ZPT	40W, 2x4" dual and triple outputs

Options

Suffix	Description
Blank	Molex connectors
/P	PCB mount pins

For additional information, please visit
<https://product.tdk.com/en/power/>



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[TDK-Lambda:](#)

[ZPSA60-15](#) [ZPSA60-24](#) [ZPSA60-30](#) [ZPSA40-28](#) [ZPSA40-36](#) [ZPSA40-48](#) [ZPSA40-5](#) [ZPSA60-12](#) [ZPSA60-28](#)
[ZPSA60-5](#) [ZPSA60-9](#) [ZPSA40-12](#) [ZPSA40-24](#) [ZPSA40-15](#) [ZPSA40-30](#) [ZPSA40-3R3](#) [ZPSA40-9](#) [ZPSA60-36](#)
[ZPSA60-3R3](#) [ZPSA60-48](#)