

## Thin-Film Chip Capacitors

### ACCU-F® TECHNOLOGY

The use of very low-loss dielectric materials, silicon dioxide and silicon oxynitride, in conjunction with highly conductive electrode metals results in low ESR and high Q. These high-frequency characteristics change at a slower rate with increasing frequency than for ceramic microwave capacitors.

Because of the thin-film technology, the above-mentioned frequency characteristics are obtained without significant compromise of properties required for surface mounting.

The main Accu-F® properties are:

- Internationally agreed sizes with excellent dimensional control.
- Small size chip capacitors (0603) are available.
- Tight capacitance tolerances.
- Low ESR at VHF, UHF and microwave frequencies.
- High stability with respect to time, temperature, frequency and voltage variation.
- Nickel/solder-coated terminations to provide excellent solderability and leach resistance.

### ACCU-F® FEATURES

Accu-F® meets the fast-growing demand for low-loss (high-Q) capacitors for use in surface mount technology especially for the mobile communications market, such as cellular radio of 450 and 900 MHz, UHF walkie-talkies, UHF cordless telephones to 2.3 GHz, low noise blocks at 11-12.5 GHz and for other VHF, UHF and microwave applications.

Accu-F® is currently unique in its ability to offer very low capacitance values (0.1pF) and very tight capacitance tolerances ( $\pm 0.05pF$ ). Typically Accu-F® will be used in small signal applications in VCO's, matching networks, filters, etc.

Inspection test and quality control procedures in accordance with ISO 9001, CECC, IECQ and USA MIL Standards yield products of the highest quality.

### APPLICATIONS

- |  |                     |
|--|---------------------|
| Cellular Communications                              | Radar Systems       |
| CT2/PCN (Cordless Telephone/Personal Comm. Networks) | Video Switching     |
| Satellite TV   | Test & Measurements |
| Cable TV   | Filters             |
| GPS (Global Positioning Systems)                     | VCO's               |
| Vehicle Location Systems                             | Matching Networks   |
| Vehicle Alarm Systems                                |                     |
| Paging   |                     |
| Military Communications                              |                     |

### APPROVALS

ISO 9001

### ACCU-P® TECHNOLOGY

As in the Accu-F® series the use of very low-loss dielectric materials (silicon dioxide and silicon oxynitride) in conjunction with highly conductive electrode metals results in low ESR and high Q. At high frequency these characteristics change at a slower rate with increasing frequency than conventional ceramic microwave capacitors. Using thin-film technology, the above-mentioned frequency characteristics are obtained without significant compromise of properties required for surface mounting. The use of high thermal conductivity materials results in excellent RF power handling capabilities.

The main Accu-P® properties are:

- Enhanced RF power handling capability.
- Improved mechanical characteristics.
- Internationally agreed sizes with excellent dimensional control.
- Ultra Small size chip capacitors (0201) are available.
- Tight capacitance tolerances.
- Low ESR at UHF, VHF, and microwave frequencies.
- High-stability with respect to time, temperature, frequency and voltage variation.
- High temperature nickel/solder-coated terminations as standard to provide excellent solderability and leach resistance.

### ACCU-P® FEATURES

- Minimal batch to batch variability of parameters at high frequency.
- The Accu-P® has the same unique features as the Accu-F® capacitor such as low ESR, high Q, availability of very low capacitance values and very tight capacitance tolerances.
- The RF power handling capability of the Accu-P® allows for its usage in both small signal and RF power applications.
- Inspection, test and quality control procedures in accordance with ISO 9001, CECC, IECQ and USA MIL Standards guarantee product of the highest quality.
- Hand soldering Accu-P®: Due to their construction utilizing relatively high thermal conductivity materials, Accu-P's have become the preferred device in R & D labs and production environments where hand soldering is used. Accu-P's are available in all sizes and are electrically identical to their Accu-F counterparts.

### APPLICATIONS

- |  |                     |
|--|---------------------|
| Cellular Communications                              | Radar Systems       |
| CT2/PCN (Cordless Telephone/Personal Comm. Networks) | Video Switching     |
| Satellite TV   | Test & Measurements |
| Cable TV   | Filters             |
| GPS (Global Positioning Systems)                     | VCO's               |
| Vehicle Location Systems                             | Matching Networks   |
| Vehicle Alarm Systems                                | RF Amplifiers       |
| Paging   |                     |
| Military Communications                              |                     |

### APPROVALS


ISO 9001

# Accu-F® \*/ Accu-P®

## Thin-Film Chip Capacitors for RF Signal and Power Applications



1

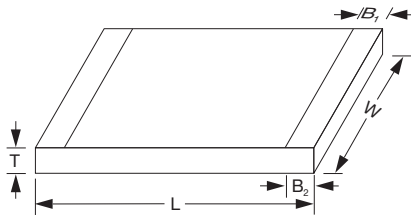

### ACCU-F® \*(Signal Type Capacitors)

|          | 0603                      | 0805                      |
|----------|---------------------------|---------------------------|
| <b>L</b> | 1.60±0.1<br>(0.063±0.004) | 2.01±0.1<br>(0.079±0.004) |
| <b>W</b> | 0.81±0.1<br>(0.032±0.004) | 1.27±0.1<br>(0.050±0.004) |
| <b>T</b> | 0.63±0.1<br>(0.025±0.004) | 0.63±0.1<br>(0.025±0.004) |
| <b>B</b> | 0.30±0.1<br>(0.012±0.004) | 0.30±0.1<br>(0.012±0.004) |

\*Not recommended for new designs. Accu-P's are recommended. **DIMENSIONS:** millimeters (inches)

### ACCU-P® (Signal and Power Type Capacitors)

|                      | 0201                          | 0402*  | 0603*                      | 0805*                     | 1210                      |
|----------------------|-------------------------------|--|----------------------------|---------------------------|---------------------------|
| <b>L</b>             | 0.60±0.05<br>(0.023±0.002)    | 1.00±0.1<br>(0.039±0.004)  | 1.60±0.1<br>(0.063±0.004)  | 2.01±0.1<br>(0.079±0.004) | 3.02±0.1<br>(0.119±0.004) |
| <b>W</b>             | 0.325±0.050<br>(0.0128±0.002) | 0.55±0.07<br>(0.022±0.003)   | 0.81±0.1<br>(0.032±0.004)  | 1.27±0.1<br>(0.050±0.004) | 2.5±0.1<br>(0.100±0.004)  |
| <b>T</b>             | 0.225±0.050<br>(0.009±0.002)  | 0.40±0.1<br>(0.016±0.004)  | 0.63±0.1<br>(0.025±0.004)  | 0.93±0.2<br>(0.036±0.008) | 0.93±0.2<br>(0.036±0.008) |
| <b>B<sub>1</sub></b> | 0.10±0.10<br>(0.004±0.004)    | 0.00 <sup>+0.1</sup> <sub>-0.0</sub><br>(0.000 <sup>+0.004</sup> <sub>-0.000</sub> ) | 0.35±0.15<br>(0.014±0.006) | 0.30±0.1<br>(0.012±0.004) | 0.43±0.1<br>(0.017±0.004) |
| <b>B<sub>2</sub></b> | 0.15±0.05<br>(0.006±0.002)    | 0.20±0.1<br>(0.008±0.004)  | 0.35±0.15<br>(0.014±0.006) | 0.30±0.1<br>(0.012±0.004) | 0.43±0.1<br>(0.017±0.004) |

\*Mount Black Side Up

**DIMENSIONS:** millimeters (inches)

### HOW TO ORDER

| 0402          | 3        | J                           | 4R7   | A                             | B                      | S   | TR               |
|---------------|----------|-----------------------------|---|-------------------------------|------------------------|---|------------------|
| <b>Size</b>   | 1 = 100V | Temperature Coefficient (1) | Capacitance   | Tolerance for <b>C≤2.0pF*</b> | Specification Code     | Termination Code                                | Packaging Code   |
| 0201*         | 5 = 50V  | J = 0±30ppm/°C              | Capacitance expressed in pF. (2 significant digits + number of zeros) | P = ±0.02pF                   | A = Accu-F® technology | W = Nickel/Solder Coated                        | TR = Tape & Reel |
| 0402*         | 3 = 25V  | (-55°C to +125°C)           | for values <10pF, letter R denotes decimal point.                     | Q = ±0.03pF                   | B = Accu-P® technology | <b>Accu-F®</b> Sn63, Pb37                       |                  |
| 0603          | Y = 16V  | K = 0±60ppm/°C              | Example: 68pF = 680   | A = ±0.05pF                   |                        | <b>Accu-P® 0402</b> Sn90, Pb10                  |                  |
| 0805          | Z = 10V  | (-55°C to +125°C)           | 8.2pF = 8R2   | B = ±0.1pF                    |                        | T = Nickel/High Temperature Solder Coated       |                  |
| 1210*         |          |                             |   | C = ±0.25pF                   |                        | <b>Accu-P® 0805**</b> , <b>1210**</b>           |                  |
| * Accu-P ONLY |          |                             |   | for <b>C≤3.0pF</b>            |                        | Sn96, Ag4                                       |                  |
|               |          |                             |   | Q = ±0.03pF                   |                        | Nickel/Solder Coated                            |                  |
|               |          |                             |   | A = ±0.05pF                   |                        | <b>Accu-P® 0603</b>                             |                  |
|               |          |                             |   | B = ±0.1pF                    |                        | Sn63, Pb37                                      |                  |
|               |          |                             |   | C = ±0.25pF                   |                        | **S = Nickel/Lead Free Solder Coated            |                  |
|               |          |                             |   | for <b>C≤5.6pF</b>            |                        | <b>Accu-P® 0201</b> , <b>0402</b> , <b>0603</b> |                  |
|               |          |                             |   | A = ±0.05pF                   |                        | Sn100   |                  |
|               |          |                             |   | B = ±0.1pF                    |                        |   |                  |
|               |          |                             |   | C = ±0.25pF                   |                        |   |                  |
|               |          |                             |   | for <b>5.6pF&lt;C&lt;10pF</b> |                        |   |                  |
|               |          |                             |   | B = ±0.1pF                    |                        |   |                  |
|               |          |                             |   | C = ±0.25pF                   |                        |   |                  |
|               |          |                             |   | D = ±0.5pF                    |                        |   |                  |
|               |          |                             |   | for <b>C≥10pF</b>             |                        |   |                  |
|               |          |                             |   | F = ±1%                       |                        |   |                  |
|               |          |                             |   | G = ±2%                       |                        |   |                  |
|               |          |                             |   | J = ±5%                       |                        |   |                  |

(1) TC's shown are per EIA/IEC Specifications.

**Not RoHS Compliant**



LEAD-FREE  
LEAD-FREE COMPATIBLE COMPONENT



RoHS  
COMPLIANT

For RoHS compliant products, please select correct termination style.

**\*\*RoHS compliant**

**Engineering Kits Available**  
see pages 90-91

\*Tolerances as tight as ±0.01pF are available. Please consult the factory.

### ELECTRICAL SPECIFICATIONS

|   |  |
|---|--|
| Operating and Storage Temperature Range | -55°C to +125°C  |
| Temperature Coefficients <sup>(1)</sup> | 0 ± 30ppm/°C dielectric code "J" / 0 ± 60ppm/°C dielectric code "K"    |
| Capacitance Measurement                 | 1 MHz, 1 Vrms  |
| Insulation Resistance (IR)              | ≥10 <sup>11</sup> Ohms (≥10 <sup>10</sup> Ohms for 0201 and 0402 size) |
| Proof Voltage                           | 2.5 U <sub>R</sub> for 5 secs.   |
| Aging Characteristic                    | Zero   |
| Dielectric Absorption                   | 0.01%  |

(1) TC's shown are per EIA/IEC Specifications.

## Signal Type Capacitors

### Accu-F® Capacitance Ranges (pF)

#### TEMP. COEFFICIENT CODE

“J” = 0±30ppm/°C  
(-55°C to +125°C)<sup>(2)</sup>

| Size                     |          | 0603 |    |    | 0805 |    |    |
|--------------------------|----------|------|----|----|------|----|----|
| Size Code                |          | 0603 |    |    | 0805 |    |    |
| Voltage                  |          | 100  | 50 | 25 | 100  | 50 | 25 |
| Cap in pF <sup>(1)</sup> | Cap code |      |    |    |      |    |    |
| 0.1                      | — 0R1    |      |    |    |      |    |    |
| 0.2                      | — 0R2    |      |    |    |      |    |    |
| 0.3                      | — 0R3    |      |    |    |      |    |    |
| 0.4                      | — 0R4    |      |    |    |      |    |    |
| 0.5                      | — 0R5    |      |    |    |      |    |    |
| 0.6                      | — 0R6    |      |    |    |      |    |    |
| 0.7                      | — 0R7    |      |    |    |      |    |    |
| 0.8                      | — 0R8    |      |    |    |      |    |    |
| 0.9                      | — 0R9    |      |    |    |      |    |    |
| 1.0                      | — 1R0    |      |    |    |      |    |    |
| 1.2                      | — 1R2    |      |    |    |      |    |    |
| 1.5                      | — 1R5    |      |    |    |      |    |    |
| 1.8                      | — 1R8    |      |    |    |      |    |    |
| 2.2                      | — 2R2    |      |    |    |      |    |    |
| 2.7                      | — 2R7    |      |    |    |      |    |    |
| 3.3                      | — 3R3    |      |    |    |      |    |    |
| 3.9                      | — 3R9    |      |    |    |      |    |    |
| 4.7                      | — 4R7    |      |    |    |      |    |    |
| 5.6                      | — 5R6    |      |    |    |      |    |    |
| 6.8                      | — 6R8    |      |    |    |      |    |    |
| 8.2                      | — 8R2    |      |    |    |      |    |    |
| 10                       | — 100    |      |    |    |      |    |    |
| 12                       | — 120    |      |    |    |      |    |    |
| 15                       | — 150    |      |    |    |      |    |    |
| 18                       | — 180    |      |    |    |      |    |    |
| 22                       | — 220    |      |    |    |      |    |    |
| 27                       | — 270    |      |    |    |      |    |    |
| 33                       | — 330    |      |    |    |      |    |    |
| 39                       | — 390    |      |    |    |      |    |    |
| 47                       | — 470    |      |    |    |      |    |    |
| 56                       | — 560    |      |    |    |      |    |    |
| 68                       | — 680    |      |    |    |      |    |    |
| 82                       | — 820    |      |    |    |      |    |    |
| 100                      | — 101    |      |    |    |      |    |    |
| 120                      | — 121    |      |    |    |      |    |    |
| 150                      | — 151    |      |    |    |      |    |    |

<sup>(1)</sup> For capacitance values higher than listed in table, please consult factory.

<sup>(2)</sup> TC shown is per EIA/IEC Specifications.

#### TEMP. COEFFICIENT CODE

“K” = 0±60ppm/°C  
(-55°C to +125°C)<sup>(2)</sup>

| Size                     |          | 0603 |    |    | 0805 |    |    |
|--------------------------|----------|------|----|----|------|----|----|
| Size Code                |          | 0603 |    |    | 0805 |    |    |
| Voltage                  |          | 100  | 50 | 25 | 100  | 50 | 25 |
| Cap in pF <sup>(1)</sup> | Cap code |      |    |    |      |    |    |
| 0.1                      | — 0R1    |      |    |    |      |    |    |
| 0.2                      | — 0R2    |      |    |    |      |    |    |
| 0.3                      | — 0R3    |      |    |    |      |    |    |
| 0.4                      | — 0R4    |      |    |    |      |    |    |
| 0.5                      | — 0R5    |      |    |    |      |    |    |
| 0.6                      | — 0R6    |      |    |    |      |    |    |
| 0.7                      | — 0R7    |      |    |    |      |    |    |
| 0.8                      | — 0R8    |      |    |    |      |    |    |
| 0.9                      | — 0R9    |      |    |    |      |    |    |
| 1.0                      | — 1R0    |      |    |    |      |    |    |
| 1.2                      | — 1R2    |      |    |    |      |    |    |
| 1.5                      | — 1R5    |      |    |    |      |    |    |
| 1.8                      | — 1R8    |      |    |    |      |    |    |
| 2.2                      | — 2R2    |      |    |    |      |    |    |
| 2.7                      | — 2R7    |      |    |    |      |    |    |
| 3.3                      | — 3R3    |      |    |    |      |    |    |
| 3.9                      | — 3R9    |      |    |    |      |    |    |
| 4.7                      | — 4R7    |      |    |    |      |    |    |
| 5.6                      | — 5R6    |      |    |    |      |    |    |
| 6.8                      | — 6R8    |      |    |    |      |    |    |
| 8.2                      | — 8R2    |      |    |    |      |    |    |
| 10                       | — 100    |      |    |    |      |    |    |
| 12                       | — 120    |      |    |    |      |    |    |
| 15                       | — 150    |      |    |    |      |    |    |
| 18                       | — 180    |      |    |    |      |    |    |
| 22                       | — 220    |      |    |    |      |    |    |
| 27                       | — 270    |      |    |    |      |    |    |
| 33                       | — 330    |      |    |    |      |    |    |
| 39                       | — 390    |      |    |    |      |    |    |
| 47                       | — 470    |      |    |    |      |    |    |
| 56                       | — 560    |      |    |    |      |    |    |
| 68                       | — 680    |      |    |    |      |    |    |
| 82                       | — 820    |      |    |    |      |    |    |
| 100                      | — 101    |      |    |    |      |    |    |
| 120                      | — 121    |      |    |    |      |    |    |
| 150                      | — 151    |      |    |    |      |    |    |

<sup>(1)</sup> For capacitance values higher than listed in table, please consult factory.

<sup>(2)</sup> TC shown is per EIA/IEC Specifications.

Intermediate values are available within the indicated range.

\*Not recommended for new designs.  
Accu-P's are recommended.

### Accu-P<sup>®</sup> Capacitance Ranges (pF)

#### TEMP. COEFFICIENT CODE

“J” = 0±30ppm/°C (-55°C to +125°C)<sup>(2)</sup>

| Size                     |          | 0201 |    |    |    |    | 0402 |    |    |    |    | 0603 |    |    | 0805 |    |    | 1210 |    |
|--------------------------|----------|------|----|----|----|----|------|----|----|----|----|------|----|----|------|----|----|------|----|
| Size Code                |          | 0201 |    |    |    |    | 0402 |    |    |    |    | 0603 |    |    | 0805 |    |    | 1210 |    |
| Voltage                  |          | 100  | 50 | 25 | 16 | 10 | 100  | 50 | 25 | 16 | 10 | 100  | 50 | 25 | 100  | 50 | 25 | 100  | 50 |
| Cap in pF <sup>(1)</sup> | Cap code |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 0.1                      | — 0R1    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 0.2                      | — 0R2    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 0.3                      | — 0R3    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 0.4                      | — 0R4    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 0.5                      | — 0R5    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 0.6                      | — 0R6    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 0.7                      | — 0R7    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 0.8                      | — 0R8    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 0.9                      | — 0R9    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 1.0                      | — 1R0    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 1.1                      | — 1R1    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 1.2                      | — 1R2    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 1.3                      | — 1R3    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 1.4                      | — 1R4    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 1.5                      | — 1R5    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 1.6                      | — 1R6    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 1.7                      | — 1R7    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 1.8                      | — 1R8    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 1.9                      | — 1R9    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 2.0                      | — 2R0    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 2.1                      | — 2R1    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 2.2                      | — 2R2    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 2.3                      | — 2R3    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 2.4                      | — 2R4    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 2.5                      | — 2R5    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 2.6                      | — 2R6    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 2.7                      | — 2R7    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 2.8                      | — 2R8    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 2.9                      | — 2R9    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 3.0                      | — 3R0    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 3.1                      | — 3R1    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 3.2                      | — 3R2    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 3.3                      | — 3R3    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 3.4                      | — 3R4    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 3.5                      | — 3R5    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 3.6                      | — 3R6    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 3.7                      | — 3R7    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 3.8                      | — 3R8    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 3.9                      | — 3R9    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 4.0                      | — 4R0    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 4.1                      | — 4R1    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 4.2                      | — 4R2    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 4.3                      | — 4R3    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 4.4                      | — 4R4    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 4.5                      | — 4R5    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 4.6                      | — 4R6    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 4.7                      | — 4R7    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 5.1                      | — 5R1    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 5.6                      | — 5R6    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 6.2                      | — 6R2    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 6.8                      | — 6R8    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 7.5                      | — 7R5    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 8.2                      | — 8R2    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 9.1                      | — 9R1    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 10.0                     | — 100    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 11.0                     | — 110    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 12.0                     | — 120    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 13.0                     | — 130    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 14.0                     | — 140    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 15.0                     | — 150    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 16.0                     | — 160    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 17.0                     | — 170    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 18.0                     | — 180    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 19.0                     | — 190    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 20.0                     | — 200    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 21.0                     | — 210    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 22.0                     | — 220    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 24.0                     | — 240    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 27.0                     | — 270    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 30.0                     | — 300    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 33.0                     | — 330    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 39.0                     | — 390    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 47.0                     | — 470    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 56.0                     | — 560    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |
| 68.0                     | — 680    |      |    |    |    |    |      |    |    |    |    |      |    |    |      |    |    |      |    |

<sup>(1)</sup> For capacitance values higher than listed in table, please consult factory.

<sup>(2)</sup> TC shown is per EIA/IEC Specifications.

These values are produced with “K” temperature coefficient code only.

#### TEMP. COEFFICIENT CODE

“K” = 0±60ppm/°C (-55°C to +125°C)<sup>(2)</sup>

| Size                     |          | 805 |    |    | 1210 |                   |
|--------------------------|----------|-----|----|----|------|-------------------|
| Size Code                |          | 805 |    |    | 1210 |                   |
| Voltage                  |          | 100 | 50 | 25 | 100  | 50 <sup>(3)</sup> |
| Cap in pF <sup>(1)</sup> | Cap code |     |    |    |      |                   |
| 0.1                      | — 0R1    |     |    |    |      |                   |
| 0.2                      | — 0R2    |     |    |    |      |                   |
| 0.3                      | — 0R3    |     |    |    |      |                   |
| 0.4                      | — 0R4    |     |    |    |      |                   |
| 0.5                      | — 0R5    |     |    |    |      |                   |
| 0.6                      | — 0R6    |     |    |    |      |                   |
| 0.7                      | — 0R7    |     |    |    |      |                   |
| 0.8                      | — 0R8    |     |    |    |      |                   |
| 0.9                      | — 0R9    |     |    |    |      |                   |
| 1.0                      | — 1R0    |     |    |    |      |                   |
| 1.1                      | — 1R1    |     |    |    |      |                   |
| 1.2                      | — 1R2    |     |    |    |      |                   |
| 1.3                      | — 1R3    |     |    |    |      |                   |
| 1.4                      | — 1R4    |     |    |    |      |                   |
| 1.5                      | — 1R5    |     |    |    |      |                   |
| 1.6                      | — 1R6    |     |    |    |      |                   |
| 1.7                      | — 1R7    |     |    |    |      |                   |
| 1.8                      | — 1R8    |     |    |    |      |                   |
| 1.9                      | — 1R9    |     |    |    |      |                   |
| 2.0                      | — 2R0    |     |    |    |      |                   |
| 2.1                      | — 2R1    |     |    |    |      |                   |
| 2.2                      | — 2R2    |     |    |    |      |                   |
| 2.3                      | — 2R3    |     |    |    |      |                   |
| 2.4                      | — 2R4    |     |    |    |      |                   |
| 2.5                      | — 2R5    |     |    |    |      |                   |
| 2.6                      | — 2R6    |     |    |    |      |                   |
| 2.7                      | — 2R7    |     |    |    |      |                   |
| 2.8                      | — 2R8    |     |    |    |      |                   |
| 2.9                      | — 2R9    |     |    |    |      |                   |
| 3.0                      | — 3R0    |     |    |    |      |                   |
| 3.1                      | — 3R1    |     |    |    |      |                   |
| 3.2                      | — 3R2    |     |    |    |      |                   |
| 3.3                      | — 3R3    |     |    |    |      |                   |
| 3.4                      | — 3R4    |     |    |    |      |                   |
| 3.5                      | — 3R5    |     |    |    |      |                   |
| 3.6                      | — 3R6    |     |    |    |      |                   |
| 3.7                      | — 3R7    |     |    |    |      |                   |
| 3.8                      | — 3R8    |     |    |    |      |                   |
| 3.9                      | — 3R9    |     |    |    |      |                   |
| 4.0                      | — 4R0    |     |    |    |      |                   |
| 4.1                      | — 4R1    |     |    |    |      |                   |
| 4.2                      | — 4R2    |     |    |    |      |                   |
| 4.3                      | — 4R3    |     |    |    |      |                   |
| 4.4                      | — 4R4    |     |    |    |      |                   |
| 4.5                      | — 4R5    |     |    |    |      |                   |
| 4.6                      | — 4R6    |     |    |    |      |                   |
| 4.7                      | — 4R7    |     |    |    |      |                   |
| 5.1                      | — 5R1    |     |    |    |      |                   |
| 5.6                      | — 5R6    |     |    |    |      |                   |
| 6.2                      | — 6R2    |     |    |    |      |                   |
| 6.8                      | — 6R8    |     |    |    |      |                   |
| 7.5                      | — 7R5    |     |    |    |      |                   |
| 8.2                      | — 8R2    |     |    |    |      |                   |
| 9.1                      | — 9R1    |     |    |    |      |                   |
| 10.0                     | — 100    |     |    |    |      |                   |
| 11.0                     | — 110    |     |    |    |      |                   |
| 12.0                     | — 120    |     |    |    |      |                   |
| 13.0                     | — 130    |     |    |    |      |                   |
| 14.0                     | — 140    |     |    |    |      |                   |
| 15.0                     | — 150    |     |    |    |      |                   |
| 16.0                     | — 160    |     |    |    |      |                   |
| 17.0                     | — 170    |     |    |    |      |                   |
| 18.0                     | — 180    |     |    |    |      |                   |
| 19.0                     | — 190    |     |    |    |      |                   |
| 20.0                     | — 200    |     |    |    |      |                   |
| 21.0                     | — 210    |     |    |    |      |                   |
| 22.0                     | — 220    |     |    |    |      |                   |
| 24.0                     | — 240    |     |    |    |      |                   |
| 27.0                     | — 270    |     |    |    |      |                   |
| 30.0                     | — 300    |     |    |    |      |                   |
| 33.0                     | — 330    |     |    |    |      |                   |
| 39.0                     | — 390    |     |    |    |      |                   |
| 47.0                     | — 470    |     |    |    |      |                   |
| 56.0                     | — 560    |     |    |    |      |                   |
| 68.0                     | — 680    |     |    |    |      |                   |

<sup>(1)</sup> For capacitance values higher than listed in table, please consult factory.

<sup>(2)</sup> TC shown is per EIA/IEC Specifications.

<sup>(3)</sup> For 50 volt range, please consult factory.

Intermediate values are available within the indicated range.

## 0201 Typical Electrical Tables

1

| Capacitance<br>@ 1 MHz<br>(pF) | Self<br>Resonance<br>Frequency<br>(GHz)<br>Typical | 250MHz                 |           |                     | 500MHz                 |           |                     | 750MHz                 |           |                     | 1000MHz                |           |                     | 1250MHz                |           |                     |
|--------------------------------|--|------------------------|-----------|---------------------|------------------------|-----------|---------------------|------------------------|-----------|---------------------|------------------------|-----------|---------------------|------------------------|-----------|---------------------|
|                                |  | Typ.<br>C(eff)<br>(pF) | Typ.<br>Q | Typ.<br>ESR<br>(mΩ) | Typ.<br>C(eff)<br>(pF) | Typ.<br>Q | Typ.<br>ESR<br>(mΩ) | Typ.<br>C(eff)<br>(pF) | Typ.<br>Q | Typ.<br>ESR<br>(mΩ) | Typ.<br>C(eff)<br>(pF) | Typ.<br>Q | Typ.<br>ESR<br>(mΩ) | Typ.<br>C(eff)<br>(pF) | Typ.<br>Q | Typ.<br>ESR<br>(mΩ) |
| 0.8                            | 9.1  | 0.84                   | 2154      | 360                 | 0.84                   | 630       | 603                 | 0.85                   | 424       | 594                 | 0.85                   | 327       | 577                 | 0.86                   | 255       | 588                 |
| 1.2                            | 7.6  | 1.21                   | 1375      | 405                 | 1.21                   | 525       | 517                 | 1.22                   | 341       | 527                 | 1.23                   | 267       | 503                 | 1.23                   | 208       | 515                 |
| 1.8                            | 6.3  | 1.84                   | 1298      | 271                 | 1.85                   | 520       | 341                 | 1.86                   | 337       | 347                 | 1.87                   | 270       | 326                 | 1.88                   | 201       | 347                 |
| 2.2                            | 5.7  | 2.23                   | 1355      | 214                 | 2.24                   | 512       | 281                 | 2.25                   | 335       | 284                 | 2.27                   | 264       | 270                 | 2.29                   | 199       | 284                 |
| 3.3                            | 4.6  | 3.29                   | 1295      | 156                 | 3.31                   | 430       | 230                 | 3.33                   | 285       | 230                 | 3.36                   | 220       | 223                 | 3.40                   | 159       | 242                 |
| 3.9                            | 4.3  | 3.91                   | 1902      | 93                  | 3.93                   | 460       | 181                 | 3.97                   | 298       | 185                 | 4.02                   | 227       | 181                 | 4.08                   | 163       | 198                 |
| 4.7                            | 3.9  | 4.71                   | 1677      | 84                  | 4.74                   | 391       | 174                 | 4.80                   | 252       | 178                 | 4.87                   | 181       | 183                 | 4.97                   | 130       | 200                 |
| 5.6                            | 3.6  | 5.62                   | 1391      | 84                  | 5.67                   | 370       | 154                 | 5.74                   | 257       | 148                 | 5.83                   | 195       | 144                 | 5.95                   | 140       | 157                 |
| 6.8                            | 3.3  | 6.77                   | 1135      | 84                  | 6.83                   | 314       | 149                 | 6.91                   | 217       | 142                 | 7.03                   | 164       | 139                 | 7.18                   | 118       | 151                 |

| Capacitance<br>@ 1 MHz<br>(pF) | Self<br>Resonance<br>Frequency<br>(GHz)<br>Typical | 1500MHz                |           |                     | 1750MHz                |           |                     | 2250MHz                |           |                     | 2500MHz                |                |                     | 2750MHz                |           |                     |
|--------------------------------|--|------------------------|-----------|---------------------|------------------------|-----------|---------------------|------------------------|-----------|---------------------|------------------------|----------------|---------------------|------------------------|-----------|---------------------|
|                                |  | Typ.<br>C(eff)<br>(pF) | Typ.<br>Q | Typ.<br>ESR<br>(mΩ) | Typ.<br>C(eff)<br>(pF) | Typ.<br>Q | Typ.<br>ESR<br>(mΩ) | Typ.<br>C(eff)<br>(pF) | Typ.<br>Q | Typ.<br>ESR<br>(mΩ) | Typ.<br>C(eff)<br>(pF) | Typ.<br>Q<br>M | Typ.<br>ESR<br>(mΩ) | Typ.<br>C(eff)<br>(pF) | Typ.<br>Q | Typ.<br>ESR<br>(mΩ) |
| 0.8                            | 9.1  | 0.86                   | 204       | 611                 | 0.87                   | 168       | 631                 | 0.88                   | 141       | 587                 | 0.89                   | 126            | 571                 | 0.90                   | 122       | 532                 |
| 1.2                            | 7.6  | 1.24                   | 155       | 565                 | 1.26                   | 129       | 577                 | 1.28                   | 92        | 570                 | 1.30                   | 89             | 566                 | 1.31                   | 81        | 558                 |
| 1.8                            | 6.3  | 1.90                   | 148       | 388                 | 1.92                   | 123       | 395                 | 1.96                   | 96        | 395                 | 1.99                   | 83             | 396                 | 2.02                   | 74        | 397                 |
| 2.2                            | 5.7  | 2.32                   | 145       | 320                 | 2.34                   | 123       | 322                 | 2.41                   | 93        | 329                 | 2.46                   | 81             | 328                 | 2.50                   | 72        | 330                 |
| 3.3                            | 4.6  | 3.45                   | 119       | 266                 | 3.50                   | 101       | 263                 | 3.63                   | 74        | 277                 | 3.73                   | 64             | 276                 | 3.84                   | 55        | 281                 |
| 3.9                            | 4.3  | 4.16                   | 122       | 216                 | 4.25                   | 103       | 214                 | 4.46                   | 75        | 224                 | 4.63                   | 64             | 223                 | 4.79                   | 56        | 225                 |
| 4.7                            | 3.9  | 5.08                   | 99        | 213                 | 5.23                   | 83        | 212                 | 5.55                   | 60        | 221                 | 5.83                   | 50             | 222                 | 6.10                   | 43        | 224                 |
| 5.6                            | 3.6  | 6.11                   | 108       | 166                 | 6.31                   | 91        | 164                 | 6.76                   | 64        | 174                 | 7.16                   | 53             | 175                 | 7.56                   | 45        | 141                 |
| 6.8                            | 3.3  | 7.38                   | 93        | 155                 | 7.63                   | 76        | 158                 | 8.22                   | 54        | 166                 | 8.74                   | 44             | 169                 | 9.29                   | 37        | 173                 |

## 0402 Typical Electrical Tables

| Capacitance & Tolerance* @ 1 MHz (pF) | Self Resonance Frequency (GHz) Typical | Ref Freq (MHz) | Typ. C(eff) (pF) | Typ. Q | Typ. ESR (Ω) | Ref Freq (MHz) | Typ. C(eff) (pF) | Typ. Q | Typ. ESR (Ω) | Ref Freq (MHz) | Typ. C(eff) (pF) | Typ. Q | Typ. ESR (Ω) | Ref Freq (MHz) | Typ. C(eff) (pF) | Typ. Q | Typ. ESR (Ω) | Ref Freq (MHz) | Typ. C(eff) (pF) | Typ. Q | Typ. ESR (Ω) |      |
|---------------------------------------|--|----------------|------------------|--------|--------------|----------------|------------------|--------|--------------|----------------|------------------|--------|--------------|----------------|------------------|--------|--------------|----------------|------------------|--------|--------------|------|
| 0.1±0.05                              | 19.4                                   | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a  |
| 0.2±0.05                              | 16.4                                   | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a  |
| 0.3±0.05                              | 14.6                                   | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a  |
| 0.4±0.05                              | 12.5                                   | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a  |
| 0.5±0.05                              | 11.3                                   | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a  |
| 0.6±0.05                              | 10.4                                   | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a  |
| 0.7±0.05                              | 9.5                                    | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a  |
| 0.8±0.05                              | 9.1                                    | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a  |
| 0.9±0.05                              | 8.8                                    | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a  |
| 1.00±0.05                             | 8                                      | 247            | 1.16             | 1635   | 0.34         | 494            | 1.15             | 1283   | 0.22         | 742            | 1.13             | 870    | 0.22         | 991            | 1.12             | 620    | 0.23         | 1240           | 1.14             | 474    | 0.25         | 0.25 |
| 1.10±0.05                             | 7.8                                    | 246            | 1.25             | 1581   | 0.32         | 492            | 1.22             | 1219   | 0.21         | 740            | 1.21             | 791    | 0.22         | 989            | 1.19             | 561    | 0.24         | 1238           | 1.21             | 425    | 0.25         | 0.25 |
| 1.20±0.05                             | 7.4                                    | 245            | 1.34             | 1538   | 0.30         | 491            | 1.33             | 1153   | 0.21         | 738            | 1.31             | 727    | 0.22         | 986            | 1.3              | 503    | 0.25         | 1234           | 1.33             | 372    | 0.25         | 0.25 |
| 1.30±0.05                             | 7                                      | 244            | 1.42             | 1502   | 0.29         | 490            | 1.42             | 1109   | 0.21         | 736            | 1.4              | 701    | 0.21         | 983            | 1.35             | 480    | 0.24         | 1230           | 1.41             | 350    | 0.25         | 0.25 |
| 1.40±0.05                             | 6.8                                    | 243            | 1.53             | 1476   | 0.28         | 488            | 1.54             | 1061   | 0.20         | 733            | 1.52             | 680    | 0.21         | 980            | 1.49             | 461    | 0.23         | 1229           | 1.53             | 333    | 0.25         | 0.25 |
| 1.50±0.05                             | 6.5                                    | 242            | 1.63             | 1454   | 0.28         | 486            | 1.63             | 1002   | 0.20         | 731            | 1.58             | 638    | 0.21         | 978            | 1.6              | 438    | 0.23         | 1226           | 1.65             | 316    | 0.25         | 0.25 |
| 1.60±0.05                             | 6.5                                    | 242            | 1.71             | 1448   | 0.27         | 485            | 1.76             | 986    | 0.20         | 729            | 1.69             | 622    | 0.21         | 986            | 1.71             | 429    | 0.23         | 1224           | 1.77             | 309    | 0.24         | 0.24 |
| 1.70±0.05                             | 6.4                                    | 241            | 1.85             | 1444   | 0.27         | 483            | 1.81             | 970    | 0.19         | 728            | 1.75             | 612    | 0.20         | 985            | 1.75             | 422    | 0.22         | 1223           | 1.86             | 305    | 0.23         | 0.23 |
| 1.80±0.05                             | 6.2                                    | 240            | 1.93             | 1430   | 0.26         | 482            | 1.86             | 931    | 0.19         | 727            | 1.83             | 597    | 0.20         | 983            | 1.8              | 413    | 0.22         | 1220           | 1.91             | 299    | 0.23         | 0.23 |
| 1.90±0.05                             | 6                                      | 239            | 2.01             | 1421   | 0.25         | 481            | 1.93             | 897    | 0.19         | 726            | 1.91             | 583    | 0.20         | 972            | 1.91             | 401    | 0.21         | 1219           | 1.97             | 294    | 0.22         | 0.22 |
| 2.00±0.05                             | 5.7                                    | 239            | 2.11             | 1410   | 0.24         | 480            | 2.06             | 896    | 0.18         | 722            | 2.11             | 582    | 0.19         | 969            | 2.01             | 400    | 0.20         | 1215           | 2.11             | 293    | 0.21         | 0.21 |
| 2.10±0.05                             | 5.4                                    | 238            | 2.21             | 1406   | 0.23         | 478            | 2.14             | 893    | 0.17         | 720            | 2.21             | 581    | 0.18         | 966            | 2.1              | 398    | 0.19         | 1213           | 2.22             | 291    | 0.20         | 0.20 |
| 2.20±0.05                             | 5.1                                    | 237            | 2.28             | 1406   | 0.22         | 476            | 2.27             | 893    | 0.16         | 718            | 2.26             | 581    | 0.17         | 964            | 2.27             | 396    | 0.18         | 1212           | 2.25             | 289    | 0.19         | 0.19 |
| 2.30±0.05                             | 5                                      | 237            | 2.32             | 1405   | 0.20         | 475            | 2.36             | 870    | 0.16         | 716            | 2.4              | 549    | 0.17         | 962            | 2.3              | 379    | 0.18         | 1209           | 2.4              | 262    | 0.20         | 0.20 |
| 2.40±0.05                             | 4.9                                    | 236            | 2.45             | 1404   | 0.19         | 473            | 2.48             | 845    | 0.16         | 715            | 2.51             | 501    | 0.17         | 960            | 2.41             | 358    | 0.19         | 1208           | 2.53             | 253    | 0.20         | 0.20 |
| 2.50±0.05                             | 4.7                                    | 235            | 2.49             | 1404   | 0.18         | 472            | 2.6              | 821    | 0.16         | 714            | 2.62             | 486    | 0.17         | 959            | 2.52             | 349    | 0.19         | 1205           | 2.7              | 240    | 0.20         | 0.20 |
| 2.60±0.05                             | 4.6                                    | 234            | 2.6              | 1402   | 0.16         | 470            | 2.71             | 799    | 0.15         | 712            | 2.73             | 477    | 0.17         | 958            | 2.65             | 331    | 0.19         | 1204           | 2.85             | 231    | 0.20         | 0.20 |
| 2.70±0.05                             | 4.5                                    | 233            | 2.84             | 1399   | 0.15         | 469            | 2.83             | 778    | 0.15         | 711            | 2.82             | 464    | 0.17         | 956            | 2.86             | 313    | 0.19         | 1203           | 3                | 224    | 0.20         | 0.20 |
| 2.80±0.05                             | 4.5                                    | 233            | 2.85             | 1395   | 0.15         | 468            | 2.94             | 769    | 0.15         | 710            | 2.9              | 458    | 0.16         | 954            | 2.91             | 308    | 0.18         | 1202           | 3.12             | 220    | 0.20         | 0.20 |
| 2.90±0.05                             | 4.4                                    | 232            | 2.87             | 1395   | 0.15         | 467            | 3.11             | 751    | 0.15         | 710            | 2.99             | 450    | 0.16         | 953            | 3.15             | 303    | 0.18         | 1201           | 3.24             | 218    | 0.19         | 0.19 |
| 3.00±0.05                             | 4.4                                    | 231            | 2.88             | 1392   | 0.14         | 466            | 3.39             | 746    | 0.15         | 709            | 3.11             | 440    | 0.16         | 952            | 3.41             | 299    | 0.18         | 1201           | 3.33             | 212    | 0.19         | 0.19 |
| 3.10±0.05                             | 4.4                                    | 230            | 2.9              | 1392   | 0.14         | 465            | 3.45             | 733    | 0.15         | 708            | 3.22             | 429    | 0.16         | 951            | 3.48             | 291    | 0.18         | 1199           | 3.45             | 207    | 0.19         | 0.19 |
| 3.20±0.05                             | 4.3                                    | 230            | 2.91             | 1391   | 0.14         | 464            | 3.61             | 725    | 0.15         | 707            | 3.3              | 421    | 0.16         | 950            | 3.68             | 285    | 0.17         | 1198           | 3.58             | 203    | 0.19         | 0.19 |
| 3.30±0.05                             | 4.3                                    | 229            | 2.92             | 1391   | 0.14         | 462            | 3.72             | 711    | 0.14         | 707            | 3.42             | 415    | 0.16         | 949            | 3.8              | 282    | 0.17         | 1197           | 3.61             | 198    | 0.19         | 0.19 |
| 3.40±0.05                             | 4.3                                    | 228            | 2.93             | 1390   | 0.14         | 461            | 3.78             | 705    | 0.14         | 706            | 3.53             | 407    | 0.15         | 948            | 3.79             | 276    | 0.17         | 1196           | 3.78             | 195    | 0.19         | 0.19 |
| 3.50±0.05                             | 4.2                                    | 227            | 2.95             | 1389   | 0.13         | 460            | 3.82             | 693    | 0.14         | 705            | 3.6              | 402    | 0.15         | 947            | 3.85             | 273    | 0.16         | 1195           | 3.91             | 191    | 0.18         | 0.18 |
| 3.60±0.05                             | 4.2                                    | 226            | 2.97             | 1382   | 0.13         | 459            | 3.87             | 688    | 0.14         | 704            | 3.7              | 395    | 0.15         | 946            | 3.89             | 270    | 0.16         | 1194           | 4                | 186    | 0.18         | 0.18 |
| 3.70±0.05                             | 4.1                                    | 226            | 2.99             | 1381   | 0.13         | 458            | 3.93             | 667    | 0.14         | 702            | 3.81             | 389    | 0.15         | 945            | 3.95             | 262    | 0.16         | 1193           | 4.1              | 181    | 0.18         | 0.18 |
| 3.80±0.05                             | 4                                      | 225            | 4                | 1380   | 0.13         | 458            | 4                | 658    | 0.13         | 699            | 3.9              | 386    | 0.15         | 944            | 4.02             | 256    | 0.16         | 1192           | 4.23             | 177    | 0.18         | 0.18 |
| 3.90±0.05                             | 3.9                                    | 224            | 4.01             | 1379   | 0.13         | 457            | 4.01             | 649    | 0.13         | 697            | 4.02             | 384    | 0.15         | 943            | 4.11             | 251    | 0.16         | 1191           | 4.37             | 172    | 0.18         | 0.18 |
| 4.00±0.05                             | 3.9                                    | 224            | 4.09             | 1372   | 0.12         | 457            | 4.07             | 650    | 0.13         | 696            | 4.11             | 381    | 0.14         | 942            | 4.18             | 250    | 0.16         | 1190           | 4.46             | 170    | 0.18         | 0.18 |
| 4.10±0.05                             | 3.8                                    | 223            | 4.18             | 1370   | 0.12         | 456            | 4.18             | 655    | 0.13         | 696            | 4.2              | 380    | 0.14         | 941            | 4.23             | 248    | 0.15         | 1190           | 4.52             | 169    | 0.17         | 0.17 |
| 4.20±0.05                             | 3.8                                    | 223            | 4.27             | 1356   | 0.12         | 455            | 4.27             | 658    | 0.12         | 695            | 4.29             | 379    | 0.14         | 940            | 4.37             | 247    | 0.15         | 1199           | 4.66             | 167    | 0.17         | 0.17 |
| 4.30±0.05                             | 3.7                                    | 222            | 4.36             | 1355   | 0.12         | 454            | 4.34             | 657    | 0.12         | 694            | 4.43             | 373    | 0.14         | 939            | 4.58             | 246    | 0.15         | 1195           | 4.75             | 168    | 0.17         | 0.17 |
| 4.40±0.05                             | 3.7                                    | 222            | 4.44             | 1351   | 0.11         | 453            | 4.45             | 660    | 0.12         | 693            | 4.5              | 369    | 0.14         | 939            | 4.62             | 246    | 0.14         | 1192           | 4.82             | 162    | 0.16         | 0.16 |
| 4.50±0.05                             | 3.6                                    | 221            | 4.53             | 1350   | 0.11         | 452            | 4.52             | 665    | 0.12         | 692            | 4.6              | 364    | 0.13         | 938            | 4.7              | 245    | 0.14         | 1190           | 4.96             | 161    | 0.16         | 0.16 |
| 4.60±0.05                             | 3.6                                    | 221            | 4.62             | 1347   | 0.11         | 451            | 4.62             | 670    | 0.11         | 691            | 4.72             | 359    | 0.13         | 938            | 4.79             | 244    | 0.14         | 1188           | 5.07             | 161    | 0.16         | 0.16 |
| 4.70±0.05                             | 3.5                                    | 220            | 4.75             | 1343   | 0.11         | 450            | 4.74             | 673    | 0.11         | 690            | 4.74             | 351    | 0.13         | 937            | 4.86             | 244    | 0.14         | 1186           | 5.18             | 159    | 0.16         | 0.16 |
| 5.10±0.05                             | 3.4                                    | 217            | 5.19             | 1310   | 0.11         | 447            | 5.16             | 589    | 0.11         | 687            | 5.23             | 348    | 0.13         | 934            | 5.53             | 230    | 0.14         | 1184           | 5.82             | 131    | 0.16         | 0.16 |
| 5.60±0.05                             | 3.3                                    | 214            | 5.74             | 1297   | 0.11         | 443            | 5.75             | 576    | 0.11         | 684            | 5.81             | 342    | 0.12         | 932            | 6.01             | 201    | 0.14         | 1182           | 6.62             | 129    | 0.16         | 0.16 |
| 6.2±0.1                               | 3                                      | 211            | 6.31             | 1244   | 0.10         | 440            | 6.09             | 585    | 0.10         | 681            | 6.33             | 339    | 0.11         | 928            | 6.68             | 202    | 0.12         | 1180           | 7.34             | 128    | 0.15         | 0.15 |
| 6.8±0.1                               | 2.8                                    | 208            | 6.92             | 1202   | 0.09         | 436            | 6.94             | 591    | 0.09         | 678            | 7.04             | 334    | 0.10         | 926            | 7.39             | 203    | 0.11         | 1177           | 8.22             | 127    | 0.14         | 0.14 |
| 7.5±0.1                               | 2.7                                    | 205            | 7.57             | 1155   | 0.08         | 433            | 7.51             | 567    | 0.09         | 675            | 7.85             | 320    | 0.10         | 924            | 8.17             | 191    | 0.10         | 1176           | 9.01             | 120    | 0.13         | 0.13 |
| 8.2±0.1                               | 2.6                                    | 202            | 8.35             | 1116   | 0.08         | 430            | 8.36             | 542    | 0.08         | 673            | 8.48             | 306    | 0.09         | 922            | 8.93             | 186    | 0.10         | 1174           | 10.04            | 118    | 0.13         | 0.13 |
| 9.1±0.1                               | 2.5                                    | 199            | 9.23             | 1059   | 0.09         | 428            | 9.28             | 458    | 0.09         | 670            | 9.87             | 249    | 0.10         | 920            | 10.2             | 152    | 0.11         | 1172           | 11.98            | 88     | 0.13         | 0.13 |
| 10.0±1%                               | 2.4                                    | 196            | 10.14            | 936    | 0.09         | 424            | 10.24            | 385    | 0.10         | 668            | 10.55            | 202    | 0.11         | 919            | 11.49            | 118    | 0.13         | 1171           | 13.75            | 70     | 0.12         | 0.12 |
| 11.0±1%                               | 2.3                                    | 193            | 11.19            | 912    | 0.08         | 421            | 11.17            | 363    | 0.09         | 666            | 11.81            | 185    | 0.11         | 917            | 12.87            | 103    | 0.12         | 1170           | 15.3             | 61     | 0.12         | 0.12 |
| 12.0±1%                               | 2.2                                    | 189            | 12.16            | 889    | 0.08         | 418            | 12.3             | 348    | 0.09         | 664            | 12.77            | 173    | 0.11         | 915            | 14.16            | 95     | 0.13         | 1168           | 17.63            | 52     | 0.12         | 0.12 |
| 13.0±1%                               | 2.2                                    | 186            | 13.3             | 984    | 0.07         | 416            | 13.32            | 363    | 0.08         | 661            | 14.1             | 183    | 0.09         | 912            | 15.8             | 101    | 0.11         | 1164           | 23.9             | 47     | 0.12         | 0.12 |
| 14.0±1%                               | 2.1                                    | 184            | 14.26            | 802    | 0.08         | 414            | 14.44            | 298    | 0.09         | 660            | 15.03            | 149    | 0.12         | 913            | 16.72            | 76.7   | 0.14         | 1167           | 23.1             | 40     | 0.15         | 0.15 |
| 15.0±1%                               | 2.1                                    | 182            | 15.34            | 791    | 0.07         | 413            | 15.46            | 283    | 0.08         | 660            | 16.16            | 138    | 0.10         | 912            | 18.51            | 82     | 0.16         | 1166           | 23.6             | 44     | 0.13         | 0.13 |
| 16.0                                  |  |                |                  |        |              |                |                  |        |              |                |                  |        |              |                |                  |        |              |                |                  |        |              |      |

## 0402 Typical Electrical Tables

| Capacitance & Tolerance* @ 1 MHz (pF) | Self Resonance Frequency (GHz) Typical | Ref Freq (MHz) | Typ. C(eff) (pF) | Typ. Q | Typ. ESR (Ω) | Ref Freq (MHz) | Typ. C(eff) (pF) | Typ. Q | Typ. ESR (Ω) | Ref Freq (MHz) | Typ. C(eff) (pF) | Typ. Q | Typ. ESR (Ω) | Ref Freq (MHz) | Typ. C(eff) (pF) | Typ. Q | Typ. ESR (Ω) | Ref Freq (MHz) | Typ. C(eff) (pF) | Typ. Q | Typ. ESR (Ω) |     |
|---------------------------------------|--|----------------|------------------|--------|--------------|----------------|------------------|--------|--------------|----------------|------------------|--------|--------------|----------------|------------------|--------|--------------|----------------|------------------|--------|--------------|-----|
| 0.1±0.05                              | 19.4                                   | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a |
| 0.2±0.05                              | 16.4                                   | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a |
| 0.3±0.05                              | 14.6                                   | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a |
| 0.4±0.05                              | 12.5                                   | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a |
| 0.5±0.05                              | 11.3                                   | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a |
| 0.6±0.05                              | 10.4                                   | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a |
| 0.7±0.05                              | 9.5                                    | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a |
| 0.8±0.05                              | 9.1                                    | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a |
| 0.9±0.05                              | 8.8                                    | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a            | n/a              | n/a    | n/a          | n/a |
| 1.00±0.05                             | 8                                      | 1489           | 1.18             | 380    | 0.25         | 1739           | 1.25             | 314    | 0.25         | 1988           | 1.32             | 265    | 0.24         | 2240           | 1.38             | 229    | 0.23         | 2493           | 1.41             | 200    | 0.23         |     |
| 1.10±0.05                             | 7.8                                    | 1485           | 1.29             | 342    | 0.25         | 1735           | 1.33             | 275    | 0.25         | 1986           | 1.41             | 232    | 0.24         | 2238           | 1.49             | 201    | 0.24         | 2490           | 1.55             | 177    | 0.25         |     |
| 1.20±0.05                             | 7.4                                    | 1483           | 1.37             | 307    | 0.25         | 1732           | 1.45             | 251    | 0.25         | 1982           | 1.54             | 208    | 0.24         | 2234           | 1.59             | 173    | 0.25         | 2488           | 1.62             | 149    | 0.27         |     |
| 1.30±0.05                             | 7                                      | 1479           | 1.45             | 289    | 0.25         | 1729           | 1.58             | 240    | 0.25         | 1980           | 1.66             | 196    | 0.24         | 2230           | 1.73             | 166    | 0.25         | 2485           | 1.76             | 137    | 0.27         |     |
| 1.40±0.05                             | 6.8                                    | 1477           | 1.6              | 265    | 0.25         | 1726           | 1.71             | 221    | 0.25         | 1977           | 1.78             | 179    | 0.24         | 2229           | 1.88             | 154    | 0.25         | 2483           | 1.89             | 125    | 0.26         |     |
| 1.50±0.05                             | 6.5                                    | 1474           | 1.72             | 252    | 0.25         | 1724           | 1.82             | 203    | 0.25         | 1974           | 1.94             | 169    | 0.24         | 2227           | 2.01             | 143    | 0.25         | 2481           | 2.03             | 115    | 0.27         |     |
| 1.60±0.05                             | 6.5                                    | 1472           | 1.81             | 246    | 0.24         | 1722           | 1.91             | 201    | 0.24         | 1971           | 2.01             | 168    | 0.23         | 2226           | 2.1              | 142    | 0.24         | 2479           | 2.1              | 119    | 0.25         |     |
| 1.70±0.05                             | 6.4                                    | 1470           | 1.92             | 241    | 0.23         | 1719           | 1.99             | 199    | 0.23         | 1970           | 2.1              | 167    | 0.22         | 2225           | 2.23             | 141    | 0.23         | 2478           | 2.23             | 120    | 0.24         |     |
| 1.80±0.05                             | 6.2                                    | 1469           | 1.98             | 240    | 0.22         | 1718           | 2.06             | 198    | 0.22         | 1969           | 2.24             | 166    | 0.21         | 2223           | 2.34             | 141    | 0.22         | 2477           | 2.35             | 122    | 0.22         |     |
| 1.90±0.05                             | 6                                      | 1468           | 2.06             | 239    | 0.22         | 1717           | 2.19             | 197    | 0.21         | 1968           | 2.33             | 165    | 0.21         | 2222           | 2.41             | 140    | 0.21         | 2476           | 2.42             | 123    | 0.21         |     |
| 2.00±0.05                             | 5.7                                    | 1466           | 2.12             | 233    | 0.21         | 1716           | 2.22             | 190    | 0.21         | 1968           | 2.51             | 160    | 0.20         | 2220           | 2.62             | 138    | 0.21         | 2475           | 2.65             | 118    | 0.21         |     |
| 2.10±0.05                             | 5.4                                    | 1463           | 2.31             | 230    | 0.20         | 1714           | 2.43             | 185    | 0.21         | 1966           | 2.62             | 155    | 0.20         | 2219           | 2.76             | 132    | 0.2          | 2474           | 2.81             | 115    | 0.20         |     |
| 2.20±0.05                             | 5.1                                    | 1461           | 2.47             | 228    | 0.20         | 1711           | 2.65             | 183    | 0.20         | 1964           | 2.83             | 149    | 0.20         | 2217           | 2.91             | 126    | 0.19         | 2473           | 2.91             | 108    | 0.20         |     |
| 2.30±0.05                             | 5                                      | 1460           | 2.51             | 214    | 0.20         | 1709           | 2.81             | 168    | 0.20         | 1963           | 2.98             | 132    | 0.19         | 2216           | 3.15             | 121    | 0.19         | 2471           | 3.16             | 99     | 0.22         |     |
| 2.40±0.05                             | 4.9                                    | 1459           | 2.6              | 196    | 0.20         | 1708           | 3                | 151    | 0.20         | 1962           | 3.16             | 120    | 0.19         | 2215           | 3.42             | 109    | 0.2          | 2469           | 3.42             | 91     | 0.23         |     |
| 2.50±0.05                             | 4.7                                    | 1458           | 2.77             | 182    | 0.20         | 1706           | 3.12             | 144    | 0.20         | 1960           | 3.32             | 112    | 0.19         | 2214           | 3.58             | 92     | 0.21         | 2468           | 3.66             | 81     | 0.23         |     |
| 2.60±0.05                             | 4.6                                    | 1455           | 2.85             | 173    | 0.20         | 1705           | 3.25             | 132    | 0.20         | 1957           | 3.51             | 97     | 0.19         | 2212           | 3.73             | 85     | 0.22         | 2467           | 3.73             | 72     | 0.24         |     |
| 2.70±0.05                             | 4.5                                    | 1453           | 3.18             | 164    | 0.20         | 1703           | 3.47             | 122    | 0.20         | 1956           | 3.75             | 94     | 0.20         | 2211           | 3.89             | 78     | 0.24         | 2466           | 3.89             | 66     | 0.25         |     |
| 2.80±0.05                             | 4.5                                    | 1451           | 3.25             | 159    | 0.20         | 1702           | 3.62             | 120    | 0.20         | 1956           | 3.93             | 88     | 0.20         | 2210           | 3.97             | 75     | 0.24         | 2466           | 4.03             | 65     | 0.25         |     |
| 2.90±0.05                             | 4.4                                    | 1450           | 3.33             | 156    | 0.19         | 1702           | 3.77             | 117    | 0.20         | 1956           | 4.02             | 84     | 0.20         | 2210           | 4.12             | 73     | 0.24         | 2466           | 4.17             | 63     | 0.25         |     |
| 3.00±0.05                             | 4.4                                    | 1449           | 3.49             | 150    | 0.19         | 1701           | 3.99             | 114    | 0.20         | 1955           | 4.21             | 81     | 0.20         | 2209           | 4.26             | 72     | 0.24         | 2465           | 4.21             | 61     | 0.25         |     |
| 3.10±0.05                             | 4.4                                    | 1448           | 3.61             | 148    | 0.19         | 1700           | 4.16             | 109    | 0.20         | 1952           | 4.4              | 79     | 0.20         | 2209           | 4.45             | 70     | 0.24         | 2465           | 4.33             | 59     | 0.25         |     |
| 3.20±0.05                             | 4.3                                    | 1447           | 3.7              | 145    | 0.19         | 1700           | 4.31             | 105    | 0.20         | 1952           | 4.62             | 77     | 0.19         | 2208           | 4.62             | 69     | 0.23         | 2464           | 4.49             | 58     | 0.25         |     |
| 3.30±0.05                             | 4.3                                    | 1446           | 3.79             | 143    | 0.19         | 1699           | 4.47             | 101    | 0.20         | 1951           | 4.76             | 76     | 0.20         | 2207           | 4.81             | 68     | 0.23         | 2464           | 4.66             | 55     | 0.25         |     |
| 3.40±0.05                             | 4.3                                    | 1446           | 4.01             | 138    | 0.19         | 1698           | 4.62             | 101    | 0.20         | 1950           | 4.92             | 75     | 0.20         | 2206           | 4.93             | 66     | 0.22         | 2464           | 4.92             | 52     | 0.24         |     |
| 3.50±0.05                             | 4.2                                    | 1445           | 4.11             | 133    | 0.19         | 1697           | 4.78             | 95     | 0.20         | 1950           | 5.18             | 73     | 0.19         | 2206           | 5.21             | 65     | 0.23         | 2463           | 5.15             | 51     | 0.24         |     |
| 3.60±0.05                             | 4.2                                    | 1445           | 4.2              | 130    | 0.19         | 1697           | 4.91             | 94     | 0.20         | 1949           | 5.34             | 71     | 0.20         | 2205           | 5.4              | 63     | 0.22         | 2463           | 5.25             | 51     | 0.24         |     |
| 3.70±0.05                             | 4.1                                    | 1444           | 4.28             | 126    | 0.19         | 1696           | 5.05             | 92     | 0.19         | 1949           | 5.5              | 69     | 0.20         | 2205           | 5.62             | 62     | 0.22         | 2462           | 5.41             | 49     | 0.24         |     |
| 3.80±0.05                             | 4                                      | 1443           | 4.44             | 125    | 0.19         | 1696           | 5.11             | 90     | 0.19         | 1948           | 5.61             | 67     | 0.20         | 2204           | 5.78             | 61     | 0.22         | 2462           | 5.66             | 48     | 0.24         |     |
| 3.90±0.05                             | 3.9                                    | 1442           | 4.72             | 121    | 0.19         | 1695           | 5.26             | 89     | 0.19         | 1948           | 5.77             | 66     | 0.21         | 2204           | 5.94             | 60     | 0.22         | 2461           | 5.82             | 47     | 0.24         |     |
| 4.00±0.05                             | 3.9                                    | 1441           | 4.8              | 121    | 0.18         | 1694           | 5.38             | 88     | 0.19         | 1947           | 5.81             | 66     | 0.20         | 2203           | 6.03             | 60     | 0.21         | 2461           | 5.86             | 48     | 0.23         |     |
| 4.10±0.05                             | 3.8                                    | 1440           | 4.92             | 121    | 0.18         | 1693           | 5.5              | 87     | 0.19         | 1947           | 5.93             | 65     | 0.19         | 2203           | 6.11             | 60     | 0.21         | 2460           | 5.9              | 49     | 0.23         |     |
| 4.20±0.05                             | 3.8                                    | 1440           | 5.01             | 120    | 0.18         | 1692           | 5.63             | 87     | 0.18         | 1946           | 6.05             | 65     | 0.18         | 2203           | 6.24             | 59     | 0.21         | 2460           | 5.95             | 49     | 0.21         |     |
| 4.30±0.05                             | 3.7                                    | 1439           | 5.17             | 120    | 0.18         | 1692           | 5.78             | 85     | 0.18         | 1946           | 6.11             | 64     | 0.18         | 2202           | 6.35             | 58     | 0.2          | 2459           | 6.01             | 50     | 0.20         |     |
| 4.40±0.05                             | 3.7                                    | 1439           | 5.28             | 119    | 0.18         | 1691           | 5.91             | 85     | 0.18         | 1945           | 6.23             | 64     | 0.18         | 2202           | 6.4              | 57     | 0.2          | 2459           | 6.12             | 52     | 0.20         |     |
| 4.50±0.05                             | 3.6                                    | 1438           | 5.41             | 119    | 0.18         | 1691           | 6.04             | 81     | 0.18         | 1945           | 6.45             | 64     | 0.19         | 2201           | 6.52             | 56     | 0.19         | 2458           | 6.23             | 52     | 0.19         |     |
| 4.60±0.05                             | 3.6                                    | 1438           | 5.49             | 118    | 0.17         | 1691           | 6.11             | 80     | 0.18         | 1944           | 6.66             | 63     | 0.17         | 2201           | 6.67             | 55     | 0.18         | 2458           | 6.29             | 54     | 0.19         |     |
| 4.70±0.05                             | 3.5                                    | 1437           | 5.6              | 118    | 0.17         | 1690           | 6.23             | 80     | 0.18         | 1944           | 6.72             | 63     | 0.17         | 2200           | 6.71             | 56     | 0.18         | 2457           | 6.35             | 54     | 0.19         |     |
| 5.10±0.05                             | 3.4                                    | 1435           | 6.59             | 105    | 0.17         | 1689           | 7.48             | 75     | 0.18         | 1943           | 7.97             | 60     | 0.19         | 2200           | 8.11             | 45     | 0.2          | 2456           | 8.1              | 39     | 0.21         |     |
| 5.60±0.05                             | 3.3                                    | 1434           | 7.43             | 90     | 0.17         | 1687           | 8.75             | 61     | 0.17         | 1942           | 10.03            | 51     | 0.21         | 2199           | 10.42            | 37     | 0.22         | 2456           | 10.07            | 28     | 0.23         |     |
| 6.2±0.1                               | 3                                      | 1432           | 8.27             | 91     | 0.15         | 1686           | 10.21            | 60     | 0.15         | 1941           | 11.52            | 48     | 0.18         | 2198           | 11.88            | 36     | 0.18         | 2455           | 11.02            | 33     | 0.19         |     |
| 6.8±0.1                               | 2.8                                    | 1430           | 9.41             | 88     | 0.13         | 1684           | 11.43            | 58     | 0.13         | 1940           | 13.36            | 45     | 0.14         | 2196           | 13.72            | 37     | 0.14         | 2454           | 12.85            | 36     | 0.14         |     |
| 7.5±0.1                               | 2.7                                    | 1429           | 10.05            | 85     | 0.13         | 1683           | 12.25            | 56     | 0.14         | 1939           | 15.06            | 40     | 0.13         | 2195           | 15.24            | 35     | 0.15         | 2454           | 13.66            | 33     | 0.14         |     |
| 8.2±0.1                               | 2.6                                    | 1428           | 11.64            | 79     | 0.13         | 1682           | 14.43            | 52     | 0.13         | 1938           | 16.85            | 38     | 0.13         | 2195           | 16.65            | 32     | 0.14         | 2453           | 15.32            | 31     | 0.14         |     |
| 9.1±0.1                               | 2.5                                    | 1427           | 13.39            | 60     | 0.13         | 1681           | 19.07            | 33     | 0.14         | 1937           | 28.35            | 25     | 0.15         | 2194           | 31.08            | 15     | 0.16         | 2452           | 29.91            | 15     | 0.16         |     |
| 10.0±1%                               | 2.4                                    | 1425           | 17.6             | 41     | 0.14         | 1680           | 26.51            | 21     | 0.16         | 1936           | 40.16            | 11     | 0.17         | 2194           | 45.46            | 8      | 0.18         | 2452           | 39.54            | 8      | 0.18         |     |
| 11.0±1%                               | 2.3                                    | 1424           | 20.09            | 36     | 0.15         | 1679           | 32.66            | 19     | 0.15         | 1935           | 66.25            | 8      | 0.17         | 2192           | 81.07            | 5      | 0.2          | 2451           | 61.28            | 6      | 0.18         |     |
| 12.0±1%                               | 2.2                                    | 1423           | 24.14            | 29     | 0.15         | 1678           | 43.51            | 13     | 0.14         | 1934           | 92.97            | 5      | 0.18         | 2192           | 123.19           | 3      | 0.2          | 2450           | 82.44            | 4      | 0.19         |     |
| 13.0±1%                               | 2.2                                    | 1417           | 48.3             | 18     | 0.13         | 1671           | 63.2             | 5      | 0.17         | 1934           | 125              | 3      | 0.18         | 2191           |                  |        | 0.2          |                |                  |        |              |     |
| 14.0±1%                               | 2.1                                    | 1422           | 39.55            | 17     | 0.15         | 1677           | 122              | 2      | 0.21         | 1934           | 180.3            | 1      | 0.19         | 2191           |                  |        | 0.18         |                |                  |        |              |     |
| 15.0±1%                               | 2.1                                    | 1421           | 38.93            | 20     | 0.14         | 1676           | 154              | 2      | 0.17         | 1933           | 244.5            |        | 0.16         | 2191           |                  |        | 0.161        |                |                  |        |              |     |
| 16.0±1%                               | 2                                      | 1416           | 79.3             | 12     | 0.14         | 1670           |                  |        | 0.17         | 1932           |                  |        | 0.16         | 2191           |                  |        | 0.16         |                |                  |        |              |     |
| 17.0±1%                               | 1.9                                    | 1415           | 77.6             | 11     | 0.14         | 1670           |                  |        | 0.17         | 1932           |                  |        | 0.16         | 2191           |                  |        | 0.16         |                |                  |        |              |     |
| 18                                    |  |                |                  |        |              |                |                  |        |              |                |                  |        |              |                |                  |        |              |                |                  |        |              |     |

# Accu-F® / Accu-P®

## 0603 Typical Electrical Tables



1

| Capacitance & Tolerance* @ 1 MHz (pF) | Self Resonance Frequency (GHz) | Ref Freq. MHz | Effective Capacitance Max/Min (pF) | Max ESR (Ω) | Ref Freq. MHz | Effective Capacitance Max/Min (pF) | Max ESR (Ω) | Ref Freq. MHz | Effective Capacitance Max/Min (pF) | Max ESR (Ω) | Ref Freq. MHz | Effective Capacitance Max/Min (pF) | Max ESR (Ω) |
|---------------------------------------|--------------------------------|---------------|------------------------------------|-------------|---------------|------------------------------------|-------------|---------------|------------------------------------|-------------|---------------|------------------------------------|-------------|
| 0.1±0.05                              | 18.0                           |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.2±0.05                              | 12.7                           |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.3±0.05                              | 10.4                           |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.4±0.05                              | 9.0                            |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.5±0.05                              | 8.1                            |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.6±0.10                              | 7.4                            |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.7±0.10                              | 6.8                            |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.8±0.10                              | 6.4                            |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.9±0.10                              | 6.0                            |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 1.0±0.10                              | 5.7                            | 245           | 1.15/0.90                          | .280        | 491           | 1.10/0.90                          | .220        | 738           | 1.10/0.90                          | .220        | 987           | 1.15/0.90                          | .300        |
| 1.1±0.10                              | 5.4                            | 244           | 1.25/1.00                          | .270        | 490           | 1.25/1.00                          | .210        | 736           | 1.11/1.00                          | .210        | 985           | 1.25/1.00                          | .290        |
| 1.2±0.10                              | 5.2                            | 243           | 1.35/1.10                          | .260        | 487           | 1.35/1.05                          | .200        | 734           | 1.40/1.05                          | .210        | 981           | 1.35/1.05                          | .280        |
| 1.3±0.10                              | 5.0                            | 242           | 1.45/1.15                          | .260        | 486           | 1.45/1.15                          | .200        | 732           | 1.45/1.15                          | .200        | 974           | 1.45/1.15                          | .270        |
| 1.4±0.10                              | 4.8                            | 241           | 1.55/1.25                          | .250        | 485           | 1.55/1.25                          | .190        | 731           | 1.45/1.25                          | .200        | 977           | 1.55/1.25                          | .260        |
| 1.5±0.10                              | 4.7                            | 241           | 1.65/1.35                          | .250        | 484           | 1.65/1.35                          | .180        | 729           | 1.65/1.35                          | .190        | 976           | 1.70/1.35                          | .250        |
| 1.6±0.10                              | 4.5                            | 240           | 1.75/1.45                          | .240        | 483           | 1.75/1.45                          | .180        | 727           | 1.75/1.45                          | .190        | 973           | 1.80/1.50                          | .250        |
| 1.7±0.10                              | 4.4                            | 240           | 1.85/1.55                          | .230        | 482           | 1.85/1.60                          | .170        | 725           | 1.85/1.60                          | .180        | 971           | 1.90/1.60                          | .250        |
| 1.8±0.10                              | 4.2                            | 239           | 2.10/1.70                          | .220        | 479           | 2.10/1.70                          | .160        | 723           | 2.10/1.70                          | .170        | 969           | 2.15/1.70                          | .250        |
| 1.9±0.10                              | 4.1                            | 239           | 2.15/1.78                          | .210        | 478           | 2.15/1.80                          | .160        | 721           | 2.15/1.80                          | .167        | 967           | 2.20/1.80                          | .240        |
| 2.0±0.10                              | 4.0                            | 238           | 2.11/1.80                          | .205        | 477           | 2.11/1.80                          | .155        | 720           | 2.11/1.80                          | .165        | 966           | 2.25/1.90                          | .230        |
| 2.1±0.10                              | 3.9                            | 237           | 2.25/1.95                          | .200        | 475           | 2.25/1.98                          | .150        | 718           | 2.35/1.98                          | .162        | 964           | 2.35/2.00                          | .220        |
| 2.2±0.10                              | 3.8                            | 236           | 2.40/2.05                          | .190        | 474           | 2.45/2.05                          | .145        | 717           | 2.42/2.05                          | .160        | 962           | 2.45/2.10                          | .210        |
| 2.4±0.25                              | 3.7                            | 234           | 2.70/2.15                          | .175        | 471           | 2.75/2.15                          | .140        | 713           | 2.80/2.15                          | .150        | 958           | 2.80/2.15                          | .200        |
| 2.7±0.25                              | 3.5                            | 232           | 3.00/2.45                          | .160        | 468           | 3.10/2.45                          | .125        | 709           | 3.10/2.45                          | .145        | 954           | 3.15/2.48                          | .190        |
| 3.0±0.25                              | 3.3                            | 230           | 3.40/2.75                          | .150        | 465           | 3.40/2.75                          | .120        | 706           | 3.40/2.75                          | .140        | 951           | 3.60/2.80                          | .170        |
| 3.3±0.25                              | 3.1                            | 226           | 3.60/3.05                          | .130        | 459           | 3.70/3.05                          | .120        | 699           | 3.70/3.05                          | .130        | 945           | 3.80/3.10                          | .165        |
| 3.6±0.25                              | 3.0                            | 224           | 3.90/3.30                          | .128        | 456           | 4.25/3.35                          | .119        | 697           | 3.90/3.35                          | .125        | 942           | 4.10/3.40                          | .160        |
| 3.9±0.25                              | 2.9                            | 223           | 4.20/3.65                          | .125        | 455           | 4.35/3.70                          | .115        | 695           | 4.90/3.75                          | .120        | 940           | 5.15/3.75                          | .150        |
| 4.3±0.25                              | 2.7                            | 220           | 4.60/4.00                          | .122        | 451           | 4.80/4.05                          | .117        | 692           | 5.10/4.05                          | .115        | 937           | 5.30/4.05                          | .150        |
| 4.7±0.25                              | 2.6                            | 218           | 5.00/4.45                          | .120        | 448           | 5.20/4.45                          | .110        | 689           | 5.30/4.50                          | .115        | 935           | 5.50/4.55                          | .145        |
| 5.1±0.25                              | 2.5                            | 216           | 5.40/4.85                          | .115        | 445           | 5.70/4.89                          | .105        | 686           | 6.00/4.90                          | .115        | 931           | 6.20/5.00                          | .140        |
| 5.6±0.25                              | 2.4                            | 214           | 5.90/5.35                          | .110        | 443           | 6.10/5.35                          | .100        | 684           | 6.15/5.40                          | .110        | 929           | 6.50/5.50                          | .135        |
| 6.2±0.25                              | 2.3                            | 211           | 6.50/5.95                          | .105        | 439           | 6.90/5.95                          | .099        | 680           | 7.10/6.00                          | .110        | 927           | 8.00/6.10                          | .130        |
| 6.8±0.25                              | 2.2                            | 208           | 7.20/6.55                          | .100        | 435           | 7.25/6.55                          | .099        | 677           | 7.50/6.60                          | .110        | 925           | 9.00/6.65                          | .130        |
| 7.5±0.50                              | 2.1                            | 205           | 8.10/7.00                          | .095        | 432           | 8.10/7.00                          | .099        | 675           | 8.20/7.00                          | .110        | 925           | 9.50/7.05                          | .125        |
| 8.2±0.50                              | 2.0                            | 202           | 8.80/7.70                          | .090        | 429           | 8.80/7.70                          | .098        | 672           | 9.00/7.70                          | .110        | 921           | 10.00/7.80                         | .125        |
| 9.1±0.50                              | 1.9                            | 200           | 9.80/8.60                          | .090        | 425           | 10.95/8.65                         | .098        | 670           | 12.00/9.00                         | .110        | 919           | 13.00/9.10                         | .120        |
| 10±5%                                 | 1.8                            | 195           | 10.70/9.50                         | .085        | 422           | 11.60/9.50                         | .097        | 667           | 12.50/9.60                         | .110        | 917           | 16.00/9.90                         | .120        |
| 11±5%                                 | 1.7                            | 191           | 11.60/10.90                        | .085        | 420           | 12.20/10.60                        | .095        | 665           | 13.20/10.50                        | .110        | 916           | 17.00/10.00                        | .120        |
| 12±5%                                 | 1.6                            | 189           | 12.90/11.40                        | .085        | 418           | 13.40/11.50                        | .095        | 663           | 14.60/11.90                        | .110        | 914           | 18.00/12.00                        | .120        |
| 13±5%                                 | 1.6                            | 187           | 13.10/12.90                        | .080        | 416           | 14.00/13.00                        | .095        | 661           | 16.00/13.50                        | .110        | 913           | 21.00/14.00                        | .120        |
| 14±5%                                 | 1.5                            | 185           | 14.90/13.25                        | .080        | 414           | 16.90/14.00                        | .090        | 660           | 19.00/15.00                        | .110        | 912           | 26.00/15.00                        | .120        |
| 15±5%                                 | 1.5                            | 182           | 15.90/14.25                        | .080        | 412           | 17.50/15.30                        | .090        | 659           | 21.00/16.50                        | .100        | 911           | 29.00/17.00                        | .120        |
| 16±5%                                 | 1.4                            | 179           | 17.00/15.15                        | .070        | 410           | 18.00/15.90                        | .085        | 657           | 22.00/17.00                        | .100        | 910           | 30.00/18.00                        | .120        |
| 18±5%                                 | 1.3                            | 176           | 19.50/17.00                        | .070        | 408           | 20.20/17.10                        | .085        | 656           | 23.70/19.00                        | .100        | 908           | 33.00/21.00                        | .120        |
| 22±5%                                 | 1.2                            | 170           | 24.00/20.90                        | .066        | 404           | 25.00/20.90                        | .080        | 654           | 28.00/21.00                        | .10         | 906           | 39.00/21.50                        | .120        |
| 24±5%                                 | 1.2                            | 168           | 26.00/22.80                        | .066        | 403           | 30.00/23.00                        | .080        | 653           | N/A                                | .10         | 905           | N/A                                | .120        |
| 27±5%                                 | 1.1                            | 165           | 29.00/25.60                        | .065        | 402           | 36.00/27.00                        | .080        | 652           | N/A                                | .10         | 905           | N/A                                | .120        |
| 30±5%                                 | 1.0                            | 163           | 32.00/28.50                        | .064        | 401           | 40.00/30.00                        | .080        | 651           | N/A                                | .10         | 904           | N/A                                | .120        |
| 33±5%                                 | 1.0                            | 160           | 37.65/31.35                        | .064        | 400           | 45.00/33.00                        | .080        | 650           | N/A                                | .10         | 904           | N/A                                | .120        |

\* Other tolerances are available, see page 8





# Accu-F® / Accu-P®

## 0805 Typical Electrical Tables



1

| Capacitance & Tolerance* @ 1 MHz (pF) | Self Resonance Frequency (GHz) | Ref Freq. MHz | Effective Capacitance Max/Min (pF) | Max ESR (Ω) | Ref Freq. MHz | Effective Capacitance Max/Min (pF) | Max ESR (Ω) | Ref Freq. MHz | Effective Capacitance Max/Min (pF) | Max ESR (Ω) | Ref Freq. MHz | Effective Capacitance Max/Min (pF) | Max ESR (Ω) |
|---------------------------------------|--------------------------------|---------------|------------------------------------|-------------|---------------|------------------------------------|-------------|---------------|------------------------------------|-------------|---------------|------------------------------------|-------------|
| 0.1±0.05                              |                                |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.2±0.05                              |                                |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.3±0.05                              |                                |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.4±0.05                              |                                |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.5±0.05                              |                                |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.6±0.10                              |                                |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.7±0.10                              |                                |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.8±0.10                              |                                |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 0.9±0.10                              |                                |               | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         | N/A           | N/A                                | N/A         |
| 1.0±0.10                              | 5.6                            | 250           | 1.20/0.90                          | .320        | 500           | 1.20/0.90                          | .300        | 750           | 1.20/0.90                          | .270        | 999           | 1.20/0.90                          | .300        |
| 1.1±0.10                              | 5.4                            | 248           | 1.30/1.00                          | .290        | 496           | 1.30/1.00                          | .270        | 754           | 1.30/1.00                          | .250        | 993           | 1.30/1.00                          | .290        |
| 1.2±0.10                              | 5.1                            | 245           | 1.40/1.10                          | .270        | 492           | 1.40/1.10                          | .250        | 739           | 1.40/1.10                          | .240        | 987           | 1.40/1.10                          | .280        |
| 1.3±0.10                              | 4.9                            | 243           | 1.50/1.20                          | .260        | 488           | 1.50/1.20                          | .230        | 734           | 1.50/1.10                          | .230        | 980           | 1.50/1.10                          | .270        |
| 1.4±0.10                              | 4.8                            | 242           | 1.60/1.30                          | .240        | 487           | 1.60/1.20                          | .220        | 733           | 1.60/1.20                          | .220        | 979           | 1.60/1.30                          | .260        |
| 1.5±0.10                              | 4.6                            | 242           | 1.70/1.40                          | .230        | 486           | 1.70/1.40                          | .210        | 731           | 1.70/1.40                          | .220        | 977           | 1.70/1.40                          | .260        |
| 1.6±0.10                              | 4.5                            | 241           | 1.80/1.50                          | .220        | 484           | 1.85/1.50                          | .210        | 729           | 2.00/1.50                          | .220        | 975           | 2.00/1.50                          | .250        |
| 1.7±0.10                              | 4.3                            | 240           | 1.90/1.60                          | .210        | 483           | 1.95/1.60                          | .200        | 728           | 2.05/1.60                          | .210        | 974           | 2.20/1.60                          | .240        |
| 1.8±0.10                              | 4.2                            | 239           | 2.00/1.70                          | .200        | 482           | 2.05/1.70                          | .190        | 726           | 2.10/1.70                          | .210        | 972           | 2.30/1.70                          | .230        |
| 1.9±0.10                              | 4.1                            | 239           | 2.10/1.80                          | .200        | 481           | 2.15/1.80                          | .190        | 724           | 2.25/1.80                          | .200        | 970           | 2.40/1.80                          | .230        |
| 2.0±0.10                              | 4.0                            | 238           | 2.20/1.90                          | .190        | 479           | 2.30/1.90                          | .180        | 722           | 2.40/1.90                          | .200        | 967           | 2.60/1.95                          | .220        |
| 2.1±0.10                              | 3.9                            | 237           | 2.30/2.00                          | .190        | 477           | 2.40/2.00                          | .170        | 720           | 2.60/2.00                          | .190        | 964           | 2.80/2.06                          | .210        |
| 2.2±0.10                              | 3.8                            | 236           | 2.40/2.10                          | .180        | 475           | 2.60/2.10                          | .170        | 716           | 2.80/2.14                          | .190        | 962           | 3.06/2.17                          | .210        |
| 2.4±0.25                              | 3.6                            | 235           | 2.85/2.15                          | .170        | 473           | 3.13/2.29                          | .170        | 714           | 3.17/2.30                          | .190        | 960           | 3.31/2.31                          | .210        |
| 2.7±0.25                              | 3.4                            | 233           | 3.19/2.45                          | .160        | 470           | 3.47/2.55                          | .150        | 711           | 3.52/2.60                          | .170        | 957           | 3.67/2.60                          | .200        |
| 3.0±0.25                              | 3.3                            | 231           | 3.51/2.75                          | .150        | 465           | 3.76/2.86                          | .140        | 707           | 3.84/2.93                          | .160        | 952           | 4.00/3.00                          | .190        |
| 3.3±0.25                              | 3.1                            | 229           | 3.83/3.05                          | .140        | 463           | 4.04/3.10                          | .140        | 704           | 4.15/3.19                          | .160        | 948           | 4.38/3.30                          | .190        |
| 3.6±0.25                              | 3.0                            | 228           | 4.16/3.35                          | .140        | 462           | 4.35/3.42                          | .130        | 704           | 4.50/3.53                          | .150        | 947           | 4.80/3.60                          | .190        |
| 3.9±0.25                              | 2.9                            | 227           | 4.48/3.65                          | .130        | 459           | 4.67/3.72                          | .120        | 701           | 4.85/3.86                          | .150        | 944           | 5.23/3.90                          | .180        |
| 4.3±0.25                              | 2.7                            | 223           | 4.91/4.05                          | .130        | 456           | 5.11/4.13                          | .120        | 697           | 5.32/4.25                          | .150        | 940           | 5.79/4.50                          | .180        |
| 4.7±0.25                              | 2.6                            | 220           | 5.35/4.45                          | .120        | 451           | 5.52/4.53                          | .110        | 691           | 5.79/4.60                          | .140        | 936           | 6.36/4.80                          | .170        |
| 5.1±0.25                              | 2.5                            | 218           | 5.78/4.85                          | .120        | 447           | 5.94/4.94                          | .110        | 688           | 6.25/5.20                          | .140        | 934           | 7.16/5.74                          | .160        |
| 5.6±0.25                              | 2.4                            | 215           | 6.00/5.35                          | .100        | 444           | 6.82/5.40                          | .100        | 684           | 7.27/5.60                          | .120        | 930           | 8.25/5.90                          | .150        |
| 6.2±0.25                              | 2.3                            | 212           | 7.00/5.95                          | .100        | 442           | 7.52/6.00                          | .100        | 683           | 8.08/6.10                          | .120        | 927           | 9.35/6.80                          | .150        |
| 6.8±0.25                              | 2.2                            | 208           | 7.20/6.55                          | .100        | 435           | 8.21/6.88                          | .100        | 677           | 8.90/6.96                          | .120        | 925           | 10.46/7.32                         | .150        |
| 7.5±0.05                              | 2.1                            | 206           | 8.64/7.00                          | .100        | 434           | 9.02/7.10                          | .100        | 675           | 9.85/7.50                          | .120        | 924           | 11.75/8.42                         | .150        |
| 8.2±0.05                              | 2.0                            | 203           | 9.40/7.70                          | .090        | 432           | 9.83/7.90                          | .080        | 673           | 10.80/8.25                         | .110        | 922           | 13.04/9.53                         | .150        |
| 9.1±0.05                              | 1.9                            | 199           | 10.37/8.60                         | .080        | 429           | 10.88/8.76                         | .080        | 670           | 12.02/9.10                         | .110        | 920           | 14.70/10.70                        | .150        |
| 10±5%                                 | 1.8                            | 196           | 11.00/9.50                         | .080        | 423           | 11.92/9.76                         | .080        | 668           | 13.24/10.00                        | .110        | 918           | 15.37/11.80                        | .140        |
| 11±5%                                 | 1.8                            | 193           | 12.50/10.45                        | .080        | 420           | 13.23/10.50                        | .080        | 665           | 15.07/11.00                        | .110        | 916           | 16.00/12.20                        | .140        |
| 12±5%                                 | 1.6                            | 190           | 13.61/11.40                        | .070        | 418           | 14.50/11.90                        | .080        | 663           | 16.90/12.82                        | .110        | 915           | N/A                                | .140        |
| 13±5%                                 | 1.6                            | 187           | 14.75/12.35                        | .070        | 416           | 15.80/13.00                        | .080        | 662           | 18.87/14.00                        | .110        | 914           | N/A                                | .140        |
| 14±5%                                 | 1.5                            | 184           | 15.88/13.30                        | .070        | 414           | 17.22/14.00                        | .080        | 661           | 20.84/16.00                        | .110        | 913           | N/A                                | .140        |
| 15±5%                                 | 1.5                            | 182           | 17.02/14.25                        | .070        | 414           | 18.56/15.19                        | .080        | 660           | 22.62/19.13                        | .110        | 912           | N/A                                | .130        |
| 16±5%                                 | 1.4                            | 179           | 18.16/15.20                        | .070        | 411           | 19.90/16.28                        | .080        | 659           | 27.00/20.89                        | .100        | 911           | N/A                                | .130        |
| 18±5%                                 | 1.3                            | 176           | 20.42/17.10                        | .070        | 408           | 22.69/18.57                        | .070        | 657           | 33.00/22.10                        | .100        | 910           | N/A                                | .130        |
| 20±5%                                 | 1.3                            | 173           | 22.70/19.00                        | .060        | 406           | 25.38/20.78                        | .070        | 656           | 38.00/23.15                        | .100        | 908           | N/A                                | .130        |
| 22±5%                                 | 1.2                            | 171           | 24.95/20.90                        | .060        | 405           | 28.08/21.00                        | .070        | 655           | 42.00/24.00                        | .100        | 907           | N/A                                | .130        |
| 24±5%                                 | 1.2                            | 168           | 27.20/22.80                        | .060        | 403           | 31.31/25.61                        | .070        | 654           | N/A                                | .090        | 907           | N/A                                | .130        |
| 27±5%                                 | 1.1                            | 165           | 30.78/25.69                        | .060        | 401           | 36.10/32.20                        | .070        | 652           | N/A                                | .090        | 906           | N/A                                | .130        |
| 30±5%                                 | 1.0                            | 163           | 34.23/28.50                        | .050        | 400           | 40.58/33.20                        | .070        | 651           | N/A                                | .090        | 905           | N/A                                | .130        |
| 33±5%                                 | 1.0                            | 159           | 37.85/31.35                        | .050        | 399           | 46.65/35.00                        | .070        | 650           | N/A                                | .090        | 904           | N/A                                | .120        |
| 36±5%                                 | 0.9                            | 157           | 41.19/34.20                        | .050        | 397           | 52.22/38.00                        | .070        | 649           | N/A                                | .090        | 903           | N/A                                | .120        |
| 39±5%                                 | 0.9                            | 155           | 44.79/37.05                        | .050        | 396           | 59.08/47.08                        | .070        | 648           | N/A                                | .090        | 902           | N/A                                | .120        |
| 43±5%                                 | 0.9                            | 153           | 49.99/40.85                        | .050        | 395           | 70.50/53.04                        | .060        | 647           | N/A                                | .090        | 901           | N/A                                | .120        |
| 47±5%                                 | 0.8                            | 152           | 55.19/44.65                        | .050        | 394           | 81.99/59.00                        | .060        | 646           | N/A                                | .090        | 900           | N/A                                | .110        |

\* Other tolerances are available, see page 8


## 1210 Typical Electrical Tables

1


| Capacitance & Tolerance* @ 1 MHz (pF) | Self Resonance Frequency (GHz) | Ref Freq. (MHz) | Effective Capacitance Max/Min (pF) | Max ESR (Ω) | Ref Freq. (MHz) | Effective Capacitance Max/Min (pF) | Max ESR (Ω) | Ref Freq. (MHz) | Effective Capacitance Max/Min (pF) | Max ESR (Ω) | Ref Freq. (MHz) | Effective Capacitance Max/Min (pF) | Max ESR (Ω) |
|---------------------------------------|--------------------------------|-----------------|------------------------------------|-------------|-----------------|------------------------------------|-------------|-----------------|------------------------------------|-------------|-----------------|------------------------------------|-------------|
| 1.0±0.25                              | 4.98                           | 247             | 1.23/0.75                          | .350        | 495             | 1.34/0.86                          | .260        | 745             | 1.46/0.94                          | .280        | 995             | 1.6/0.99                           | .350        |
| 1.2±0.25                              | 4.55                           | 245             | 1.32/0.95                          | .310        | 491             | 1.45/1.00                          | .240        | 739             | 1.64/1.1                           | .260        | 987             | 2.00/1.2                           | .320        |
| 1.5±0.25                              | 4.07                           | 242             | 1.6/1.23                           | .250        | 486             | 1.75/1.3                           | .230        | 731             | 1.82/1.95                          | .250        | 978             | 2.1/1.4                            | .270        |
| 1.8±0.25                              | 9.71                           | 240             | 2.1/1.55                           | .200        | 482             | 2.21/1.56                          | .200        | 731             | 2.4/1.6                            | .200        | 978             | 2.54/1.7                           | .210        |
| 2.2±0.25                              | 9.96                           | 237             | 2.48/1.95                          | .170        | 476             | 2.68/2.00                          | .170        | 727             | 2.85/2.1                           | .180        | 969             | 3.02/2.2                           | .200        |
| 2.7±0.25                              | 2.70                           | 233             | 3.42/2.45                          | .140        | 466             | 3.49/2.55                          | .140        | 708             | 3.73/2.63                          | .150        | 952             | 3.89/2.70                          | .170        |
| 3.3±0.25                              | 2.60                           | 229             | 4.02/3.05                          | .140        | 463             | 4.09/3.15                          | .130        | 704             | 4.33/3.23                          | .140        | 948             | 4.49/3.30                          | .160        |
| 3.6±0.25                              | 2.50                           | 228             | 4.18/3.35                          | .130        | 462             | 4.32/3.43                          | .130        | 704             | 4.50/3.32                          | .140        | 947             | 4.78/3.45                          | .160        |
| 3.9±0.25                              | 2.40                           | 227             | 4.53/3.65                          | .130        | 458             | 4.66/3.73                          | .120        | 701             | 4.85/3.75                          | .140        | 944             | 5.18/3.90                          | .150        |
| 4.3±0.25                              | 2.30                           | 223             | 5.01/4.05                          | .120        | 456             | 5.11/4.14                          | .110        | 697             | 5.32/4.29                          | .130        | 940             | 5.72/4.30                          | .140        |
| 4.7±0.25                              | 2.20                           | 220             | 5.48/4.45                          | .120        | 451             | 5.62/4.50                          | .110        | 691             | 5.94/4.60                          | .130        | 936             | 6.56/4.70                          | .140        |
| 5.1±0.25                              | 2.10                           | 218             | 5.88/4.85                          | .110        | 447             | 6.04/4.90                          | .110        | 683             | 6.36/5.10                          | .130        | 933             | 7.20/5.40                          | .140        |
| 5.6±0.25                              | 2.00                           | 215             | 6.49/5.35                          | .110        | 441             | 6.72/5.56                          | .100        | 681             | 7.17/5.67                          | .120        | 928             | 8.15/6.00                          | .140        |
| 6.2±0.25                              | 1.90                           | 212             | 7.19/5.95                          | .100        | 442             | 7.26/6.07                          | .100        | 679             | 7.99/6.10                          | .110        | 927             | 9.18/7.00                          | .130        |
| 6.8±0.25                              | 1.80                           | 208             | 7.38/6.55                          | .100        | 435             | 8.16/6.42                          | .100        | 677             | 8.81/6.93                          | .110        | 925             | 10.20/7.42                         | .130        |
| 7.5±0.25                              | 1.70                           | 206             | 8.60/7.90                          | .100        | 434             | 8.90/7.25                          | .100        | 675             | 9.58/7.60                          | .100        | 924             | 11.36/8.00                         | .130        |
| 8.2±0.25                              | 1.70                           | 203             | 9.36/7.70                          | .100        | 432             | 9.76/7.96                          | .090        | 673             | 10.68/8.31                         | .100        | 922             | 13.00/9.10                         | .130        |
| 9.1±0.25                              | 1.60                           | 199             | 10.34/8.60                         | .090        | 429             | 10.87/8.88                         | .090        | 670             | 12.10/9.66                         | .090        | 920             | 15.11/10.25                        | .130        |
| 10±5%                                 | 1.50                           | 196             | 11.33/9.50                         | .090        | 423             | 11.97/9.79                         | .090        | 668             | 13.51/10.05                        | .090        | 918             | 17.22/11.06                        | .130        |
| 11±5%                                 | 1.50                           | 193             | 12.50/10.45                        | .090        | 420             | 13.23/10.83                        | .090        | 665             | 15.07/11.33                        | .090        | 916             | N/A                                | .130        |
| 12±5%                                 | 1.40                           | 190             | 13.61/11.40                        | .080        | 418             | 14.59/11.90                        | .080        | 663             | 16.90/12.82                        | .090        | 915             | N/A                                | .120        |
| 13±5%                                 | 1.30                           | 185             | 14.75/12.35                        | .080        | 416             | 15.64/13.00                        | .080        | 662             | 18.80/13.60                        | .090        | 914             | N/A                                | .120        |
| 14±5%                                 | 1.30                           | 183             | 15.89/13.30                        | .080        | 415             | 17.22/14.00                        | .080        | 661             | 20.85/16.00                        | .090        | 913             | N/A                                | .120        |
| 15±5%                                 | 1.20                           | 182             | 17.02/14.25                        | .080        | 414             | 18.56/15.19                        | .080        | 660             | 22.62/17.00                        | .090        | 912             | N/A                                | .110        |
| 16±5%                                 | 1.20                           | 180             | 18.16/15.20                        | .080        | 411             | 19.90/16.28                        | .080        | 659             | 25.12/18.00                        | .090        | 911             | N/A                                | .110        |
| 18±5%                                 | 1.10                           | 176             | 20.42/17.10                        | .070        | 408             | 22.69/18.57                        | .080        | 657             | 30.00/24.00                        | .080        | 909             | N/A                                | .110        |
| 20±5%                                 | 1.10                           | 173             | 22.70/19.00                        | .070        | 406             | 25.36/20.78                        | .080        | 656             | 35.00/26.00                        | .080        | 908             | N/A                                | .110        |
| 22±5%                                 | 1.00                           | 171             | 24.95/20.90                        | .070        | 405             | 28.06/22.96                        | .080        | 655             | 42.00/27.00                        | .080        | 908             | N/A                                | .110        |
| 24±5%                                 | 0.98                           | 168             | 27.20/22.60                        | .070        | 403             | 31.31/25.60                        | .080        | 654             | N/A                                | .080        | 907             | N/A                                | .110        |
| 25±5%                                 | 0.96                           | 166             | 26.39/23.75                        | .070        | 402             | 32.91/26.00                        | .080        | 653             | N/A                                | .080        | 907             | N/A                                | .110        |
| 27±5%                                 | 0.92                           | 164             | 30.78/25.65                        | .070        | 401             | 36.10/28.00                        | .070        | 652             | N/A                                | .080        | 906             | N/A                                | .110        |
| 28±5%                                 | 0.91                           | 163             | 31.93/26.50                        | .070        | 401             | 37.60/30.76                        | .070        | 651             | N/A                                | .080        | 906             | N/A                                | .110        |
| 30±5%                                 | 0.88                           | 162             | 34.23/28.50                        | .070        | 400             | 40.50/33.20                        | .070        | 651             | N/A                                | .080        | 905             | N/A                                | .110        |
| 32±5%                                 | 0.85                           | 161             | 36.51/30.40                        | .070        | 399             | 44.63/34.50                        | .070        | 650             | N/A                                | .080        | 905             | N/A                                | .110        |
| 33±5%                                 | 0.84                           | 159             | 37.65/31.35                        | .060        | 399             | 46.65/35.00                        | .070        | 650             | N/A                                | .080        | 905             | N/A                                | .110        |
| 34±5%                                 | 0.82                           | 158             | 38.83/32.30                        | .060        | 398             | 48.51/37.00                        | .070        | 649             | N/A                                | .080        | 904             | N/A                                | .110        |
| 36±5%                                 | 0.80                           | 157             | 41.20/34.20                        | .060        | 397             | 52.22/41.00                        | .070        | 649             | N/A                                | .070        | 904             | N/A                                | .110        |
| 39±5%                                 | 0.77                           | 155             | 44.79/37.05                        | .060        | 396             | 59.00/43.00                        | .070        | 649             | N/A                                | .070        | 904             | N/A                                | .110        |
| 43±5%                                 | 0.73                           | 153             | 49.99/40.85                        | .060        | 396             | 70.00/46.00                        | .070        | 648             | N/A                                | .070        | 904             | N/A                                | .110        |
| 47±5%                                 | 0.70                           | 152             | 55.69/44.65                        | .060        | 395             | 81.00/53.00                        | .070        | 648             | N/A                                | .070        | 903             | N/A                                | .110        |

\* Other tolerances are available, see page 8


Typical ESR vs. Frequency  
Accu-P<sup>®</sup> 0201

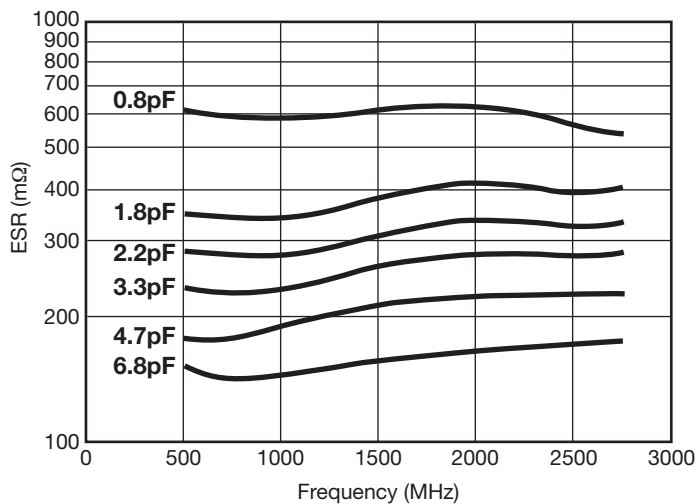

Typical SRF vs. Capacitance  
Accu-P<sup>®</sup> 0201

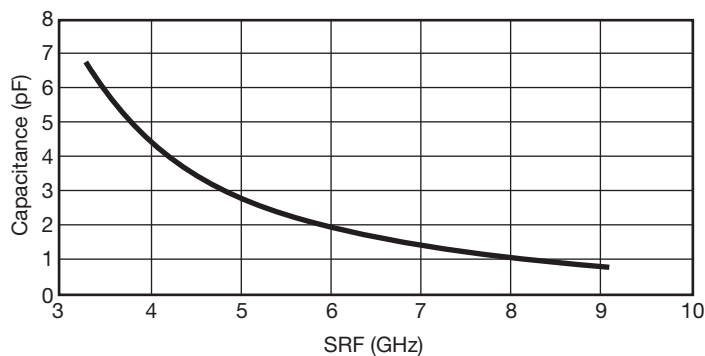

Typical Q vs. Frequency  
Accu-P<sup>®</sup> 0201

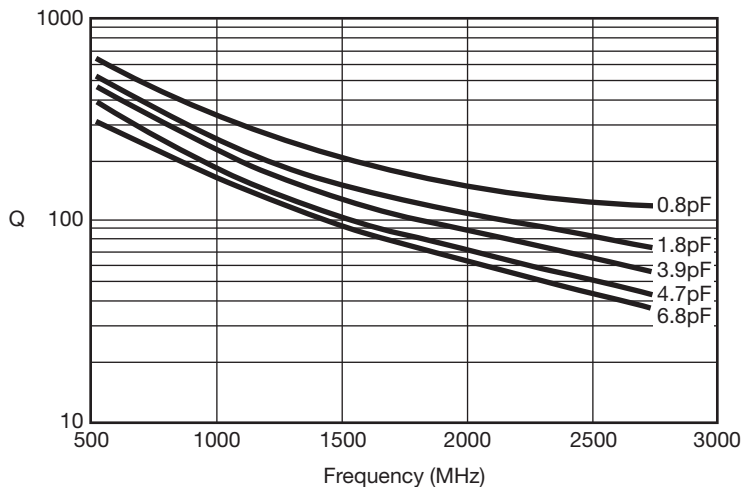


# Accu-F® / Accu-P®

## High Frequency Characteristics




1


Typical ESR vs. Frequency  
Accu-P® 0402

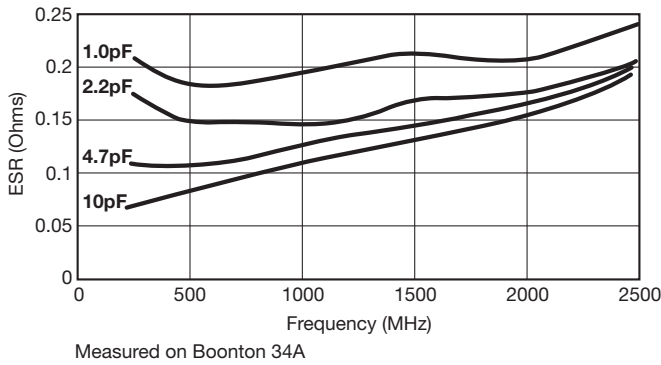


Typical ESR vs. Frequency  
Accu-F®/Accu-P® 0603

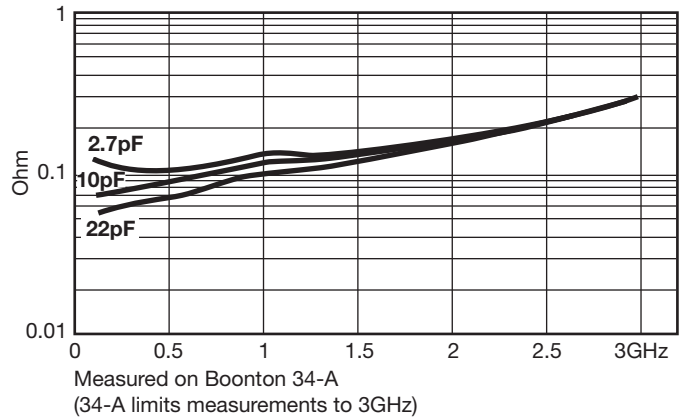


Typical Q vs. Frequency  
Accu-P® 0402

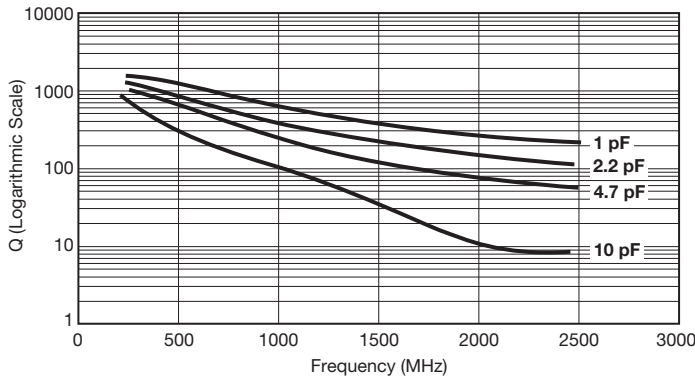


Typical Q vs. Frequency  
Accu-F®/Accu-P® 0603

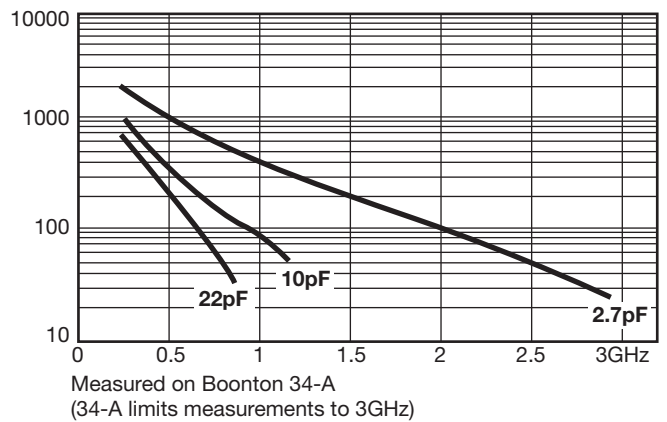

Typical Self Resonant Frequency vs. Capacitance  
Accu-P® 0402

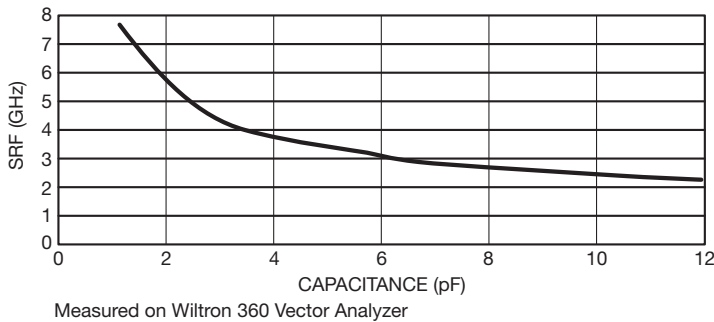

Typical Self Resonant Frequency vs. Capacitance  
Accu-F®/Accu-P® 0603

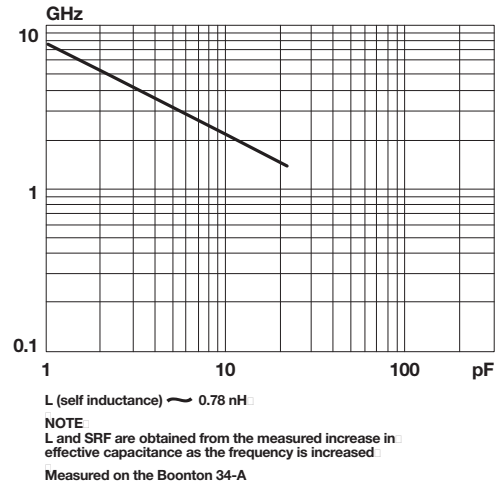


# Accu-F® / Accu-P®

## High Frequency Characteristics




1


**Typical ESR vs. Frequency**  
Accu-F®/Accu-P® 0805

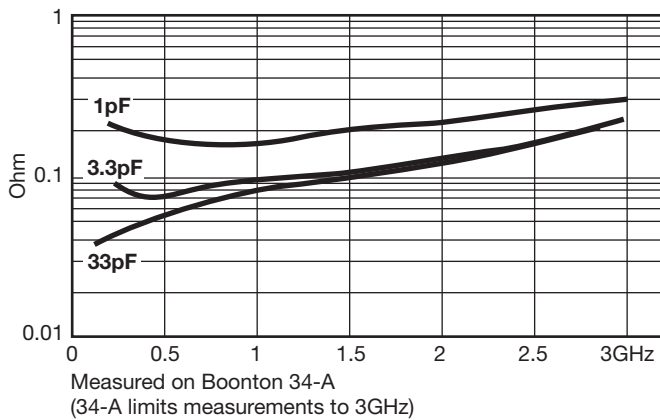


**Typical ESR vs. Frequency**  
Accu-P® 1210

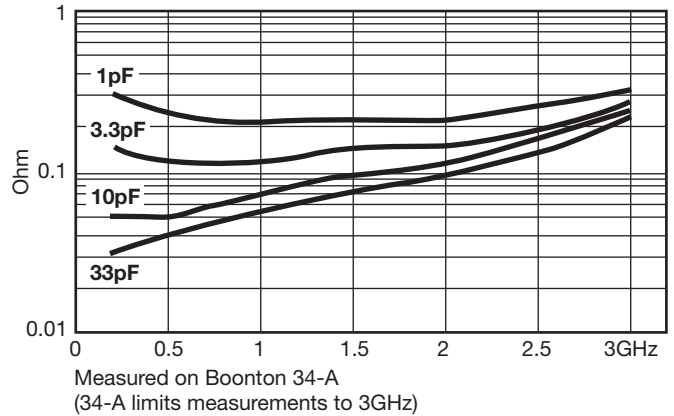


**Typical Q vs. Frequency**  
Accu-F®/Accu-P® 0805

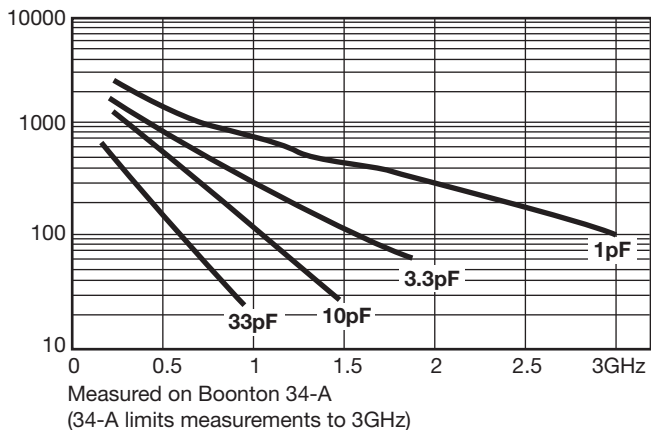

**Typical Q vs. Frequency**  
Accu-P® 1210

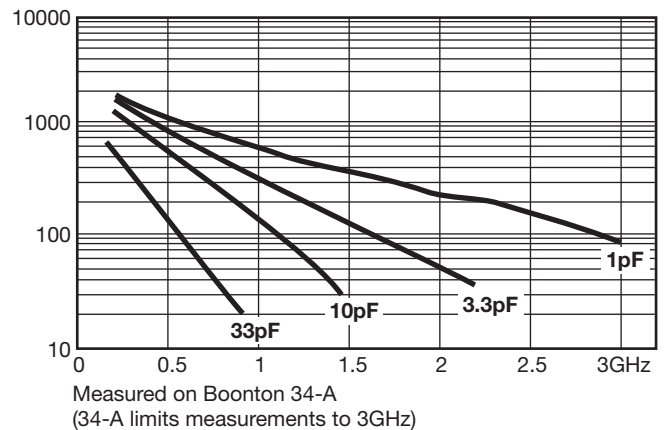


**Typical Self Resonant Frequency vs. Capacitance**  
Accu-F®/Accu-P® 0805

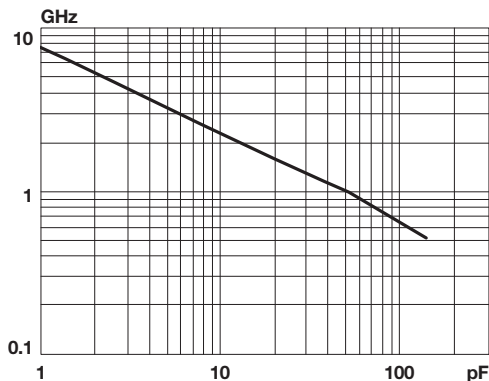

L (self inductance) ~ 0.82 nH  
NOTE  
L and SRF are obtained from the measured increase in effective capacitance as the frequency is increased  
Measured on the Boonton 34-A

**Typical Self Resonant Frequency vs. Capacitance**  
Accu-P® 1210

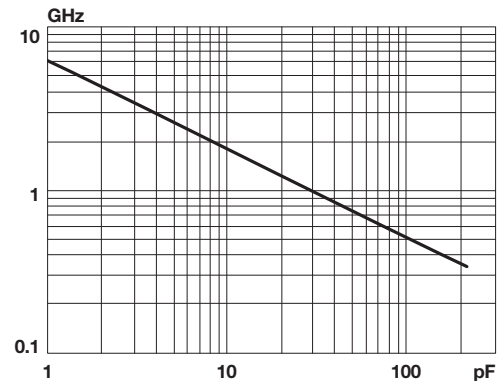

L (self inductance) ~ 1.02 nH  
NOTE  
L and SRF are obtained from the measured increase in effective capacitance as the frequency is increased  
Measured on the Boonton 34-A

### ENVIRONMENTAL CHARACTERISTICS

| TEST   | CONDITIONS  | REQUIREMENT  |
|--|---|--|
| <b>Life (Endurance)</b><br>MIL-STD-202F Method 108A                                  | 125°C, 2U <sub>R</sub> , 1000 hours   | No visible damage<br>$\Delta C/C \leq 2\%$ for $C \geq 5\text{pF}$<br>$\Delta C \leq 0.25\text{pF}$ for $C < 5\text{pF}$ |
| <b>Accelerated Damp Heat Steady State</b><br>MIL-STD-202F Method 103B                | 85°C, 85% RH, U <sub>R</sub> , 1000 hours                                   | No visible damage<br>$\Delta C/C \leq 2\%$ for $C \geq 5\text{pF}$<br>$\Delta C \leq 0.25\text{pF}$ for $C < 5\text{pF}$ |
| <b>Temperature Cycling</b><br>MIL-STD-202F Method 107E<br>MIL-STD-883D Method 1010.7 | -55°C to +125°C, 15 cycles – Accu-P®<br>-55°C to +125°C, 5 cycles – Accu-F® | No visible damage<br>$\Delta C/C \leq 2\%$ for $C \geq 5\text{pF}$<br>$\Delta C \leq 0.25\text{pF}$ for $C < 5\text{pF}$ |
| <b>Resistance to Solder Heat</b><br>IEC-68-2-58                                      | 260°C ± 5°C for 10 secs   | C remains within initial limits  |

### MECHANICAL CHARACTERISTICS

| TEST   | CONDITIONS  | REQUIREMENT  |
|--|---|--|
| <b>Solderability</b><br>IEC-68-2-58  | Components completely immersed in a solder bath at 235°C for 2 secs.    | Terminations to be well tinned, minimum 95% coverage   |
| <b>Leach Resistance</b><br>IEC-68-2-58   | Components completely immersed in a solder bath at 260±5°C for 60 secs. | Dissolution of termination faces ≤15% of area<br>Dissolution of termination edges ≤25% of length                         |
| <b>Adhesion</b><br>MIL-STD-202F Method 211A                                      | A force of 5N applied for 10 secs.                                      | No visible damage  |
| <b>Termination Bond Strength</b><br>IEC-68-2-21 Amend. 2                         | Tested as shown in diagram<br><br>D = 3mm Accu-P®<br>D = 1mm Accu-F®    | No visible damage<br>$\Delta C/C \leq 2\%$ for $C \geq 5\text{pF}$<br>$\Delta C \leq 0.25\text{pF}$ for $C < 5\text{pF}$ |
| <b>Robustness of Termination</b><br>IEC-68-2-21 Amend. 2                         | A force of 5N applied for 10 secs.                                      | No visible damage  |
| <b>High Frequency Vibration</b><br>MIL-STD-202F Method 201A, 204D (Accu-P® only) | 55Hz to 2000Hz, 20G   | No visible damage  |
| <b>Storage</b>   | 12 months minimum with components stored in “as received” packaging     | Good solderability   |

### QUALITY & RELIABILITY

Accu-P® is based on well established thin-film technology and materials.

#### • ON-LINE PROCESS CONTROL

This program forms an integral part of the production cycle and acts as a feedback system to regulate and control production processes. The test procedures, which are integrated into the production process, were developed after long research work and are based on the highly developed semiconductor industry test procedures and equipment. These measures help AVX to produce a consistent and high yield line of products.

#### • FINAL QUALITY INSPECTION

Finished parts are tested for standard electrical parameters and visual/mechanical characteristics. Each production lot is 100% evaluated for: capacitance and proof voltage at 2.5 U<sub>R</sub>. In addition, production is periodically evaluated for:

Average capacitance with histogram printout for capacitance distribution;  
IR and Breakdown Voltage distribution;  
Temperature Coefficient;  
Solderability;  
Dimensional, mechanical and temperature stability.

### QUALITY ASSURANCE

The reliability of these thin-film chip capacitors has been studied intensively for several years. Various measures have been taken to obtain the high reliability required today by the industry. Quality assurance policy is based on well established international industry standards. The reliability of the capacitors is determined by accelerated testing under the following conditions:

|                                    |  |
|------------------------------------|--|
| Life (Endurance)                   | 125°C, 2U <sub>R</sub> , 1000 hours        |
| Accelerated Damp Heat Steady State | 85°C, 85% RH, U <sub>R</sub> , 1000 hours. |

## Performance Characteristics RF Power Applications

### RF POWER APPLICATIONS

In RF power applications capacitor losses generate heat. Two factors of particular importance to designers are:

- Minimizing the generation of heat.
- Dissipating heat as efficiently as possible.

### CAPACITOR HEATING

- The major source of heat generation in a capacitor in RF power applications is a function of RF current (I) and ESR, from the relationship:

$$\text{Power dissipation} = I_{\text{RMS}}^2 \times \text{ESR}$$

- Accu-P® capacitors are specially designed to minimize

ESR and therefore RF heating. Values of ESR for Accu-P® capacitors are significantly less than those of ceramic MLC components currently available.


### HEAT DISSIPATION

- Heat is dissipated from a capacitor through a variety of paths, but the key factor in the removal of heat is the thermal conductivity of the capacitor material.
- The higher the thermal conductivity of the capacitor, the more rapidly heat will be dissipated.
- The table below illustrates the importance of thermal conductivity to the performance of Accu-P® in power applications.



| PRODUCT       | MATERIAL           | THERMAL CONDUCTIVITY W/mK |
|---------------|--------------------|---------------------------|
| Accu-P®       | Alumina            | 18.9                      |
| Microwave MLC | Magnesium Titanate | 6.0                       |

**Power Handling  
Accu-P® 10pF**

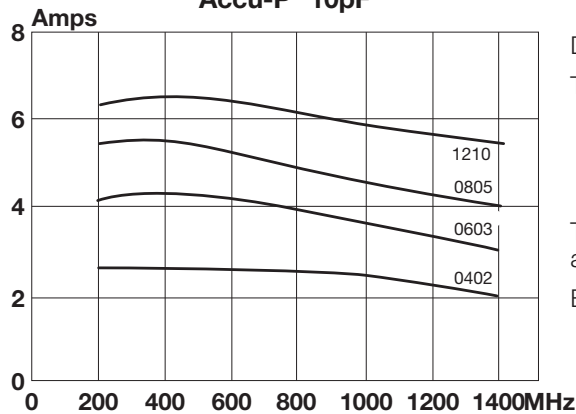

Data used in calculating the graph:

Thermal impedance of capacitors:

|      |         |
|------|---------|
| 0402 | 17°C/W  |
| 0603 | 12°C/W  |
| 0805 | 6.5°C/W |
| 1210 | 5°C/W   |

Thermal impedance measured using RF generator, amplifier and strip-line transformer.

ESR of capacitors measured on Boonton 34A

### THERMAL IMPEDANCE

Thermal impedance of Accu-P® chips is shown below compared with the thermal impedance of Microwave MLC's.

| CAPACITOR TYPE | CHIP SIZE | THERMAL IMPEDANCE (°C/W) |
|----------------|-----------|--------------------------|
| Accu-P®        | 0805      | 6.5                      |
|                | 1210      | 5                        |
| Microwave MLC  | 0505      | 12                       |
|                | 1210      | 7.5                      |

The thermal impedance expresses the temperature difference in °C between chip center and termination caused by a power dissipation of 1 watt in the chip. It is expressed in °C/W.

### ADVANTAGES OF ACCU-P® IN RF POWER CIRCUITS

The optimized design of Accu-P® offers the designer of RF power circuits the following advantages:

- Reduced power losses due to the inherently low ESR of Accu-P®.
- Increased power dissipation due to the high thermal conductivity of Accu-P®.

• THE ONLY TRUE TEST OF A CAPACITOR IN ANY PARTICULAR APPLICATION IS ITS PERFORMANCE UNDER OPERATING CONDITIONS IN THE ACTUAL CIRCUIT.

### PRACTICAL APPLICATION IN RF POWER CIRCUITS

- There is a wide variety of different experimental methods for measuring the power handling performance of a capacitor in RF power circuits. Each method has its own problems and few of them exactly reproduce the conditions present in "real" circuit applications.
- Similarly, there is a very wide range of different circuit applications, all with their unique characteristics and operating conditions which cannot possibly be covered by such "theoretical" testing.

## Application Notes

### GENERAL

Accu-F® and Accu-P® SMD capacitors are designed for soldering to printed circuit boards or other substrates. The construction of the components is such that they will withstand the time/temperature profiles used in both wave and reflow soldering methods.

1

### CIRCUIT BOARD TYPE

The circuit board types which may be used with Accu-F® and Accu-P® are as follows:

Accu-F®: All flexible types of circuit boards (eg. FR-4, G-10).

Accu-P®: All flexible types of circuit boards (eg. FR-4, G-10) and also alumina.

For other circuit board materials, please consult factory.

### HANDLING

SMD capacitors should be handled with care to avoid damage or contamination from perspiration and skin oils. The use of plastic tipped tweezers or vacuum pick-ups is strongly recommended for individual components. Bulk handling should ensure that abrasion and mechanical shock are minimized. For automatic equipment, taped and reeled product gives the ideal medium for direct presentation to the placement machine.

### COMPONENT PAD DESIGN


Component pads must be designed to achieve good joints and minimize component movement during reflow soldering. Pad designs are given below for both wave and reflow soldering.

The basis of these designs is:

- Pad width equal to component width. It is permissible to decrease this to as low as 85% of component width but it is not advisable to go below this.
- Pad overlap 0.5mm beneath large components. Pad overlap about 0.3mm beneath small components.
- Pad extension of 0.5mm for reflow of large components and pad extension about 0.3mm for reflow of small components. Pad extension about 1.0mm for wave soldering.


### WAVE SOLDERING

#### DIMENSIONS: millimeters (inches)

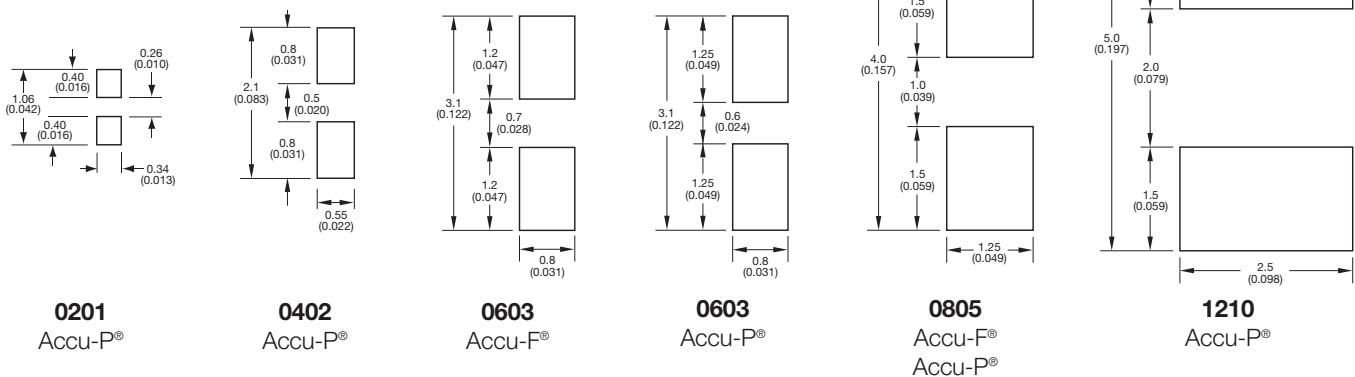

### REFLOW SOLDERING

#### DIMENSIONS: millimeters (inches)

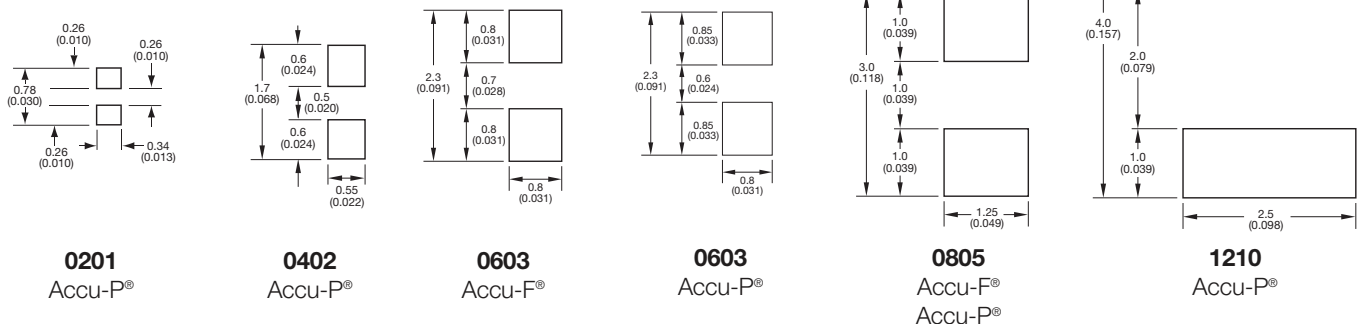



## Application Notes

### PREHEAT & SOLDERING

The rate of preheat in production should not exceed 4°C/second and a recommended maximum is about 2°C/second. Temperature differential from preheat to soldering should not exceed 100°C.

For further specific application or process advice, please consult AVX.

### COOLING


After soldering, the assembly should preferably be allowed to cool naturally. In the event of assisted cooling, similar conditions to those recommended for preheating should be used.

### HAND SOLDERING & REWORK


Hand soldering is permissible. Preheat of the PCB to 150°C is required. The most preferable technique is to use hot air soldering tools. Where a soldering iron is used, a temperature controlled model not exceeding 30 watts should be used and set to not more than 260°C.

## RECOMMENDED SOLDERING PROFILE

### IR REFLOW

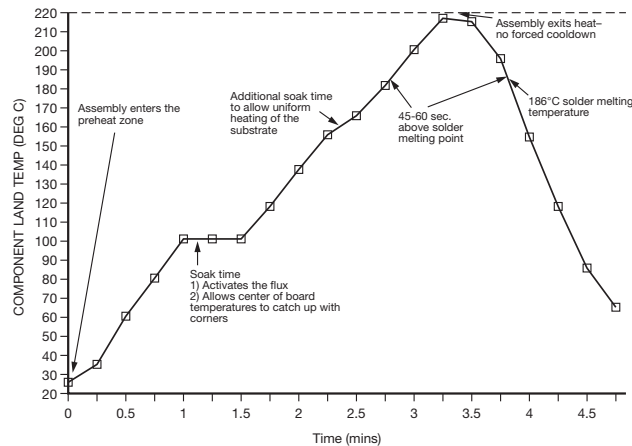

### VAPOR PHASE

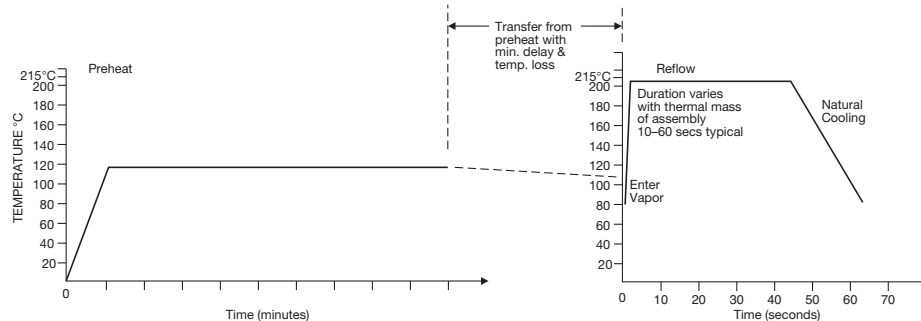

### CLEANING RECOMMENDATIONS

Care should be taken to ensure that the devices are thoroughly cleaned of flux residues, especially the space beneath the device. Such residues may otherwise become conductive and effectively offer a lossy bypass to the device. Various recommended cleaning conditions (which must be optimized for the flux system being used) are as follows:

Cleaning liquids. . . . . i-propanol, ethanol, acetylacetone, water and other standard PCB cleaning liquids.

Ultrasonic conditions . . power-20w/liter max.  
frequency-20kHz to 45kHz.

Temperature . . . . . 80°C maximum (if not otherwise limited by chosen solvent system).

Time . . . . . 5 minutes max.

### STORAGE CONDITIONS


Recommended storage conditions for Accu-F® and Accu-P® prior to use are as follows:

Temperature . . . . . 15°C to 35°C

Humidity . . . . . ≤65%

Air Pressure . . . . . 860mbar to 1060mbar

### WAVE SOLDERING

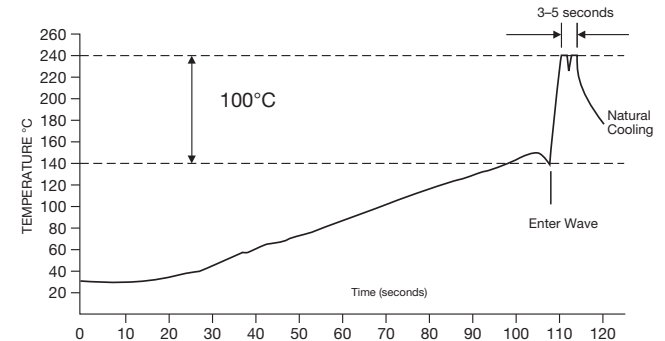

## Automatic Insertion Packaging

### TAPE & REEL

All tape and reel specifications are in compliance with EIA 481-1-A.  
(equivalent to IEC 286 part 3).

- 8mm carrier
- Reeled quantities: Reels of 3,000 per 7" reel or 10,000 pieces per 13" reel  
0201 and 0402 = 5,000 pieces per 7" reel and 20,000 pieces per 13" reel

1


### REEL

#### DIMENSIONS: millimeters (inches)

| A <sup>(1)</sup>         | B                        | C                         | D                         | E                       | F                          | G                         |
|--------------------------|--------------------------|---------------------------|---------------------------|-------------------------|----------------------------|---------------------------|
| 180±1.0<br>(7.087±0.039) | 1.5 min.<br>(0.059 min.) | 13±0.2<br>(0.512 ± 0.008) | 20.2 min.<br>(0.795 min.) | 50 min.<br>(1.969 min.) | 9.6±1.5<br>(0.370 ± 0.050) | 14.4 max.<br>(0.567 max.) |

Metric dimensions will govern.  
Inch measurements rounded and for reference only.

(1) 330mm (13 inch) reels are available.

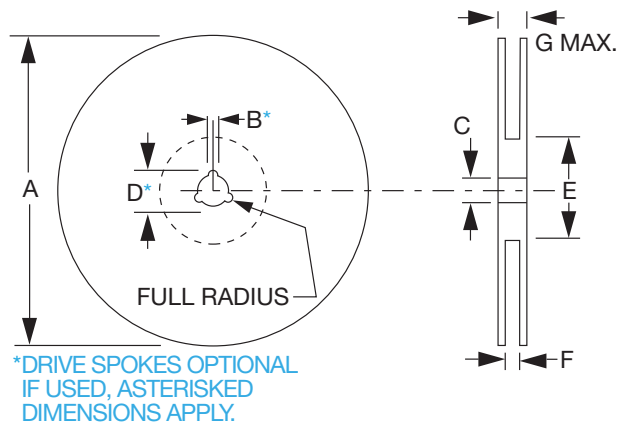


### CARRIER

#### DIMENSIONS: millimeters (inches)

| A                            | B                             | C                           | D                             | E                            | F   |
|------------------------------|-------------------------------|-----------------------------|-------------------------------|------------------------------|---|
| 8.0 ± 0.3<br>(0.315 ± 0.012) | 3.5 ± 0.05<br>(0.138 ± 0.002) | 1.75±0.1<br>(0.069 ± 0.004) | 2.0 ± 0.05<br>(0.079 ± 0.002) | 4.0 ± 0.1<br>(0.157 ± 0.004) | 1.5 <sup>+0.1</sup> <sub>-0.0</sub><br>(0.059 <sup>+0.004</sup> <sub>-0.000</sub> ) |

NOTE: The nominal dimensions of the component compartment (W,L) are derived from the component size.

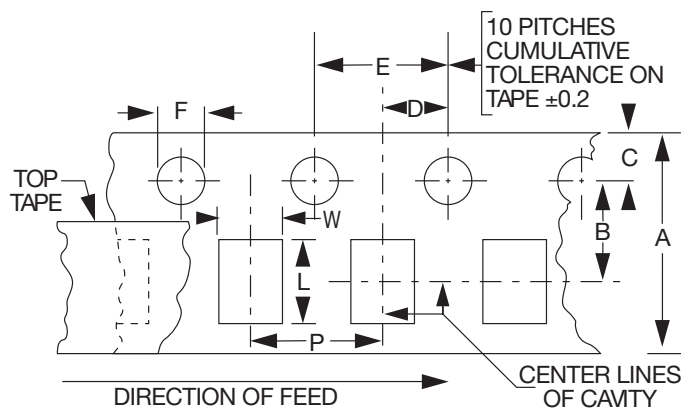

P = 4mm except 0201 and 0402 where P = 2mm

NOTE: AVX reserves the right to change the information published herein without notice.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Kyocera AVX:

[08055K220JAWTR](#) [06033J220GAWTR](#) [06035J1R2BAWTR](#) [06035J120JAWTR](#) [06035J3R9BAWTR](#)  
[06031J1R5BAWTR](#) [06035J1R0AAWTR](#) [06035J1R5BAWTR](#) [06035J1R8BAWTR](#) [06035J1R0BAWTR](#)  
[06035J1R1BAWTR](#) [08051J0R5AAWTR](#) [06035K100GAWTR](#) [06035J100GAWTR](#) [06035J1R8AAWTR](#)  
[08051J0R1AAWTR](#) [06035K0R3AAWTR](#) [06031J1R8BAWTR](#) [06035J8R2BAWTR](#) [06035J3R3AAWTR](#)  
[06035J0R3AAWTR](#) [06035J9R1BAWTR](#) [06031J3R3CAWTR](#) [06035J2R7BAWTR](#) [06031J0R5AAWTR](#)  
[06035J0R3BAWTR](#) [06035J150JAWTR](#) [06033K270GAWTR](#) [08051J1R8BAWTR](#) [06035J6R8BAWTR](#)  
[06031J0R2AAWTR](#) [06031J1R5AAWTR](#) [06031J2R4AAWTR](#) [06031K0R2AAWTR](#) [06031K1R8BAWTR](#)  
[06031K2R2BAWTR](#) [06031K2R7BAWTR](#) [06031K3R3BAWTR](#) [06031K4R7BAWTR](#) [06031K5R6BAWTR](#)  
[06031K6R8BAWTR](#) [06033J1R3BAWTR](#) [06033K220FAWTR](#) [06035J0R5AAWTR](#) [06035J0R6BAWTR](#)  
[06035J0R7AAWTR](#) [06035J150FAWTR](#) [06035J2R2CAWTR](#) [06035J3R9AAWTR](#) [06035J4R7CAWTR](#)  
[06035J8R2BBTTR\3](#) [06035J8R2CAWTR](#) [06035K100FAWTR](#) [08051J4R7BAWTR\3](#) [08051J7R5BAWTR](#)  
[08053K180GAWTR](#) [08053K560GAWTR](#) [08055J470FBT](#) [06035J0R4AAWTR](#) [08051J2R2BAWTR](#)  
[06031J1R0BAWTR](#) [06035J4R7AAWTR](#) [08051J1R5BAWTR](#) [06035J1R5AAWTR](#) [08055J1R0BAWTR](#)  
[06035J5R6BAWTR](#) [06035J3R0BAWTR](#) [06035J3R3BAWTR](#) [06035K150GAWTR](#) [06035J4R7BAWTR](#)  
[06035J2R2BAWTR](#) [06035J2R4BAWTR](#) [06035J0R9BAWTR](#) [06035J100JAWTR](#) [06035J2R0BAWTR](#)  
[08051J1R0BAWTR](#) [06035K0R2AAWTR](#) [06035J0R2AAWTR](#) [06035J0R2BAWTR](#) [06031J0R8AAWTR](#)  
[06035J0R4BAWTR](#) [06033K270JAWTR](#) [06035K180GAWTR](#) [06035K120GAWTR](#) [06035K220GAWTR](#)  
[06035J120GAWTR](#) [06035J120FAWTR](#) [06035J100FAWTR](#) [08055J1R2BAWTR](#) [08051J1R2BAWTR](#)  
[06035J8R2DAWTR](#) [06035J6R8CAWTR](#) [06035J150GAWTR](#) [06031J3R3BAWTR](#) [06031J1R2BAWTR](#)  
[06031J0R4AAWTR](#) [06035K200GAWTR](#) [06031J2R2BAWTR](#) [08055J3R3BAWTR](#) [06031J3R9CAWTR](#)