


# PTGL09AR470M6B52B0



## Specifications


Max. Voltage	125V
Hold Current(25°C)	120mA
Measure Condition of Hold Current	(at +25°C)
Hold Current (2)	90mA
Measure Condition of Hold Current (2)	(at +60°C)
Trip Current(25°C)	200mA
Measure Condition of Trip Current	(at +25°C)
Trip Current(2)	230mA
Measure Condition of Trip Current(2)	(at -10°C)
Max. Current	0.5A
Resistance (25°C)	47Ω
Resistance Value Tolerance (at 25°C)	±20%
Curie Point(typ.)	120°C
Power Consumption(typ)	1.6W
Operating Temperature Range	-10°C to 60°C
D: Outer Dimension	10mm
Thickness	5.5mm
F: Lead Space	5mm
d: Lead Diameter	0.6mm
Shape	Lead
Mass	0.93g
MSL	N

### Attention


- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# PTGL09AR470M6B52B0


## Product Data

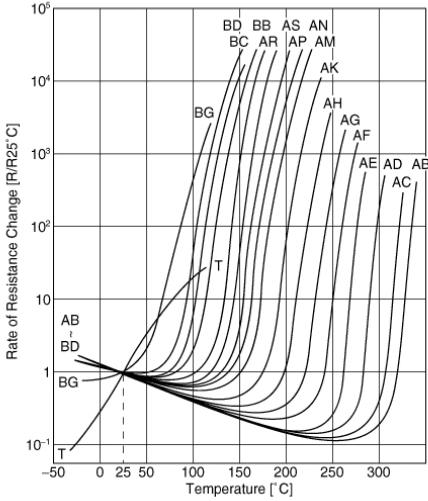

Resistance-Temperature Charac.

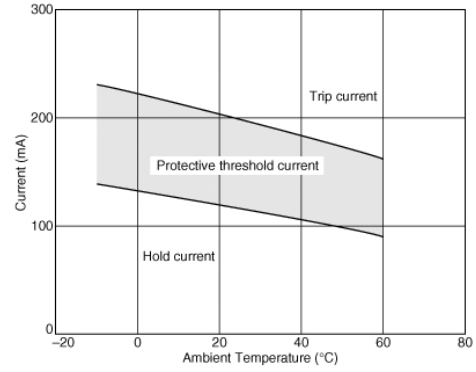

Protective Threshold Current Range

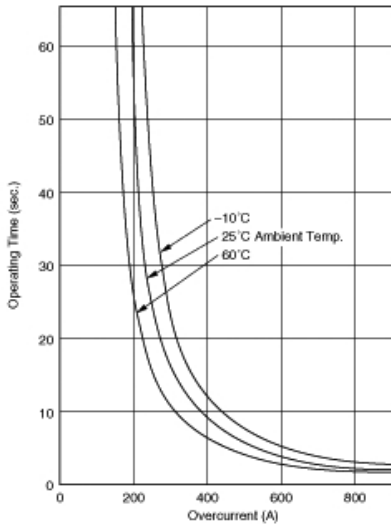

Operating Time (Typical Curve)

**Attention**

- 1.This datasheet is downloaded from the website of Murata Manufacturing Co., Ltd. Therefore, it's specifications are subject to change or our products in it may be discontinued without advance notice. Please check with our sales representatives or product engineers before ordering.
- 2.This datasheet has only typical specifications because there is no space for detailed specifications. Therefore, please review our product specifications or consult the approval sheet for product specifications before ordering.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Murata:](#)

[PTGL09AR470M6B52B0](#)