

1. Absolute Maximum Ratings

Parameter	Symbol	min.	typ.	max.	Unit	Conditions
Junction temperature	T_j	-40			°C	-
				155	°C	2000 h (not additive)
				165	°C	1000 h (not additive)
				175	°C	168 h (not additive)
				195	°C	3x1 h (additive to the other life times).

2. Operating Range

Operating junction temperature	T_j	-40			°C	-
				155	°C	2000 h (not additive)
				165	°C	1000 h (not additive)
				175	°C	168 h (not additive) reduced signal quality permissible (e.g. jitter).

3. Magnetic Characteristics in Running Mode

Minimum signal amplitude	$ \Delta B_{\min} $	0.35	0.75	1.35	mT	
--------------------------	---------------------	------	------	------	----	--

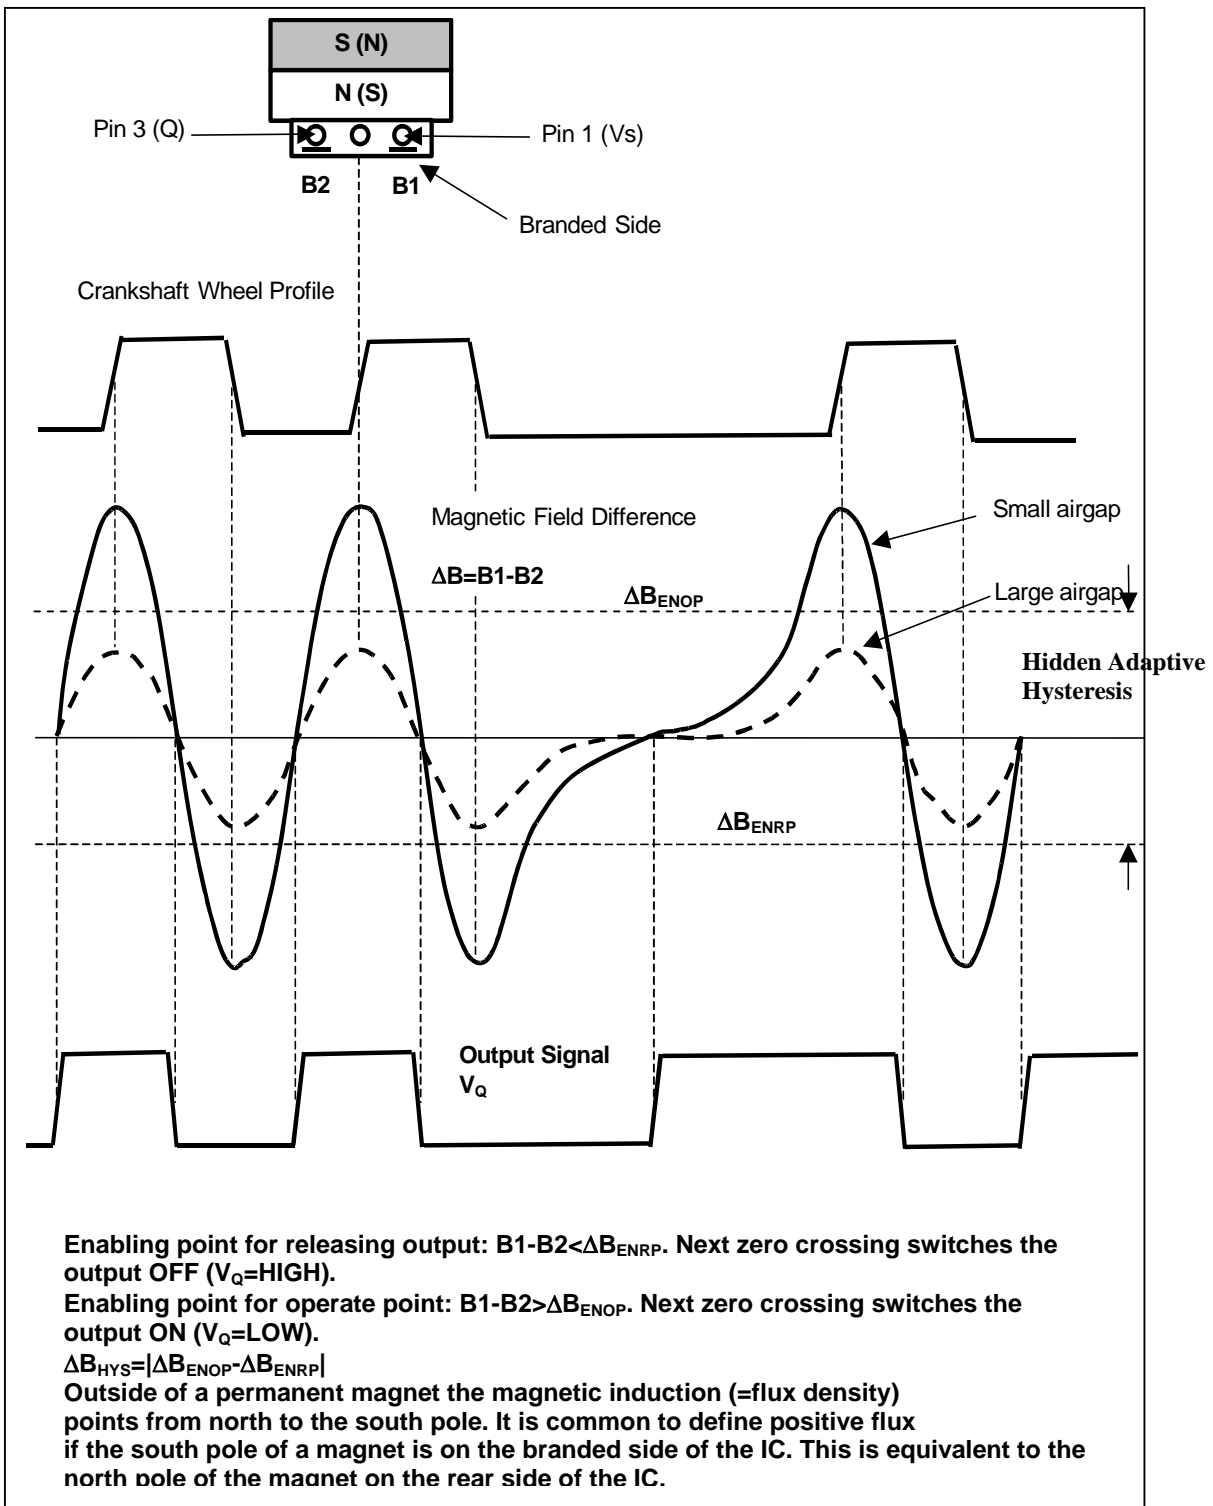


Figure 1 System operation with hidden adaptive hysteresis

4. Typical Hysteresis Values

PGA	GainRange	Hysteresis (peak to peak)	FullRange =MaxSignal	Percentage thresholds
X1	6	10.6 mT	± 120 mT	4.42 %
X2	5	8.0 mT	± 60 mT	6.67 %
X4	4	5.5 mT	± 30 mT	9.17 %
X8	3	3.8 mT	± 15 mT	12.67 %
X16	2	2.6 mT	± 7.5 mT	17.33 %
X32	1	1.8 mT	± 3.75 mT	24 %
X64	0	1.3 mT	± 1.875 mT	34.67 %



Revision History:

November 2009

Version 1.0

Previous Version: -	
Page	Subjects (major changes since last revision)
-	-

Infineon Technologies AG

© Infineon Technologies AIM SC

All Rights Reserved.

<http://www.infineon.com/products/sensors>

We Listen to Your Comments

Any information within this document that you feel is wrong, unclear or missing at all?

Your feedback will help us to continuously improve the quality of this document.

Please send your proposal (including a reference to this document) to:

Sensors@infineon.com



Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Infineon:](#)

[TLE4927C-E6947](#) [TLE4927CBE6547XTMA1](#) [TLE4927C E6547](#) [TLE4927C-N E6547](#)