



**Rectifier**

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
$V_{RSM}$	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			1700	V
$V_{RRM}$	max. repetitive reverse blocking voltage	$T_{VJ} = 25^\circ C$			1600	V
$I_R$	reverse current	$V_R = 1600 \text{ V}$ $V_R = 1600 \text{ V}$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 150^\circ C$		40 1.5	$\mu A$ mA
$V_F$	forward voltage drop	$I_F = 20 \text{ A}$ $I_F = 60 \text{ A}$ $I_F = 20 \text{ A}$ $I_F = 60 \text{ A}$	$T_{VJ} = 25^\circ C$ $T_{VJ} = 125^\circ C$		1.07 1.30 0.96 1.27	V V
$I_{DAV}$	bridge output current	$T_C = 120^\circ C$ rectangular $d = 1/3$	$T_{VJ} = 150^\circ C$		60	A
$V_{F0}$ $r_F$	threshold voltage slope resistance } for power loss calculation only		$T_{VJ} = 150^\circ C$		0.78 8.1	V $m\Omega$
$R_{thJC}$	thermal resistance junction to case				1.1	K/W
$R_{thCH}$	thermal resistance case to heatsink			0.4		K/W
$P_{tot}$	total power dissipation		$T_C = 25^\circ C$		110	W
$I_{FSM}$	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$ $V_R = 0 \text{ V}$ $T_{VJ} = 150^\circ C$ $V_R = 0 \text{ V}$		550 595 470 505	A
$I^2t$	value for fusing	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$ $t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}$ $t = 8,3 \text{ ms}; (60 \text{ Hz}), \text{sine}$	$T_{VJ} = 45^\circ C$ $V_R = 0 \text{ V}$ $T_{VJ} = 150^\circ C$ $V_R = 0 \text{ V}$		1.52 1.48 1.11 1.06	kA <sup>2</sup> s kA <sup>2</sup> s kA <sup>2</sup> s kA <sup>2</sup> s
$C_J$	junction capacitance	$V_R = 400 \text{ V}; f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ C$	19		pF

Package PWS-D			Ratings			
Symbol	Definition	Conditions	min.	typ.	max.	Unit
$I_{RMS}$	RMS current	per terminal			150	A
$T_{VJ}$	virtual junction temperature		-40		150	°C
$T_{op}$	operation temperature		-40		125	°C
$T_{stg}$	storage temperature		-40		125	°C
<b>Weight</b>				159		g
$M_D$	mounting torque		4.25		5.75	Nm
$M_T$	terminal torque		4.25		5.75	Nm
$d_{Spp/App}$	creepage distance on surface / striking distance through air		9.5			mm
$d_{Spb/Apb}$	terminal to terminal terminal to backside		26.0			mm
$V_{ISOL}$	isolation voltage	t = 1 second t = 1 minute	3000 50/60 Hz, RMS; $I_{ISOL} \leq 1$ mA	2500		V V

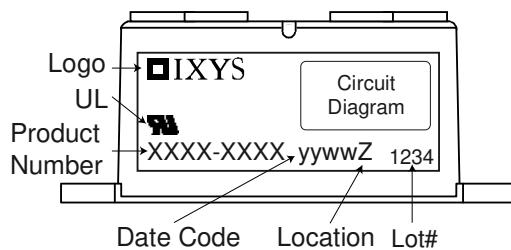



Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	VUO62-16NO7	VUO62-16NO7	Box	10	460478

**Equivalent Circuits for Simulation**
\* on die level
 $T_{VJ} = 150^\circ\text{C}$ 

**Rectifier**

$V_{0\max}$  threshold voltage 0.78  
 $R_{0\max}$  slope resistance \* 6.9

V

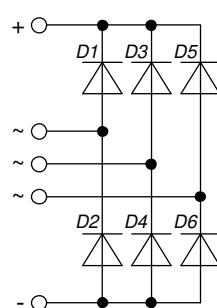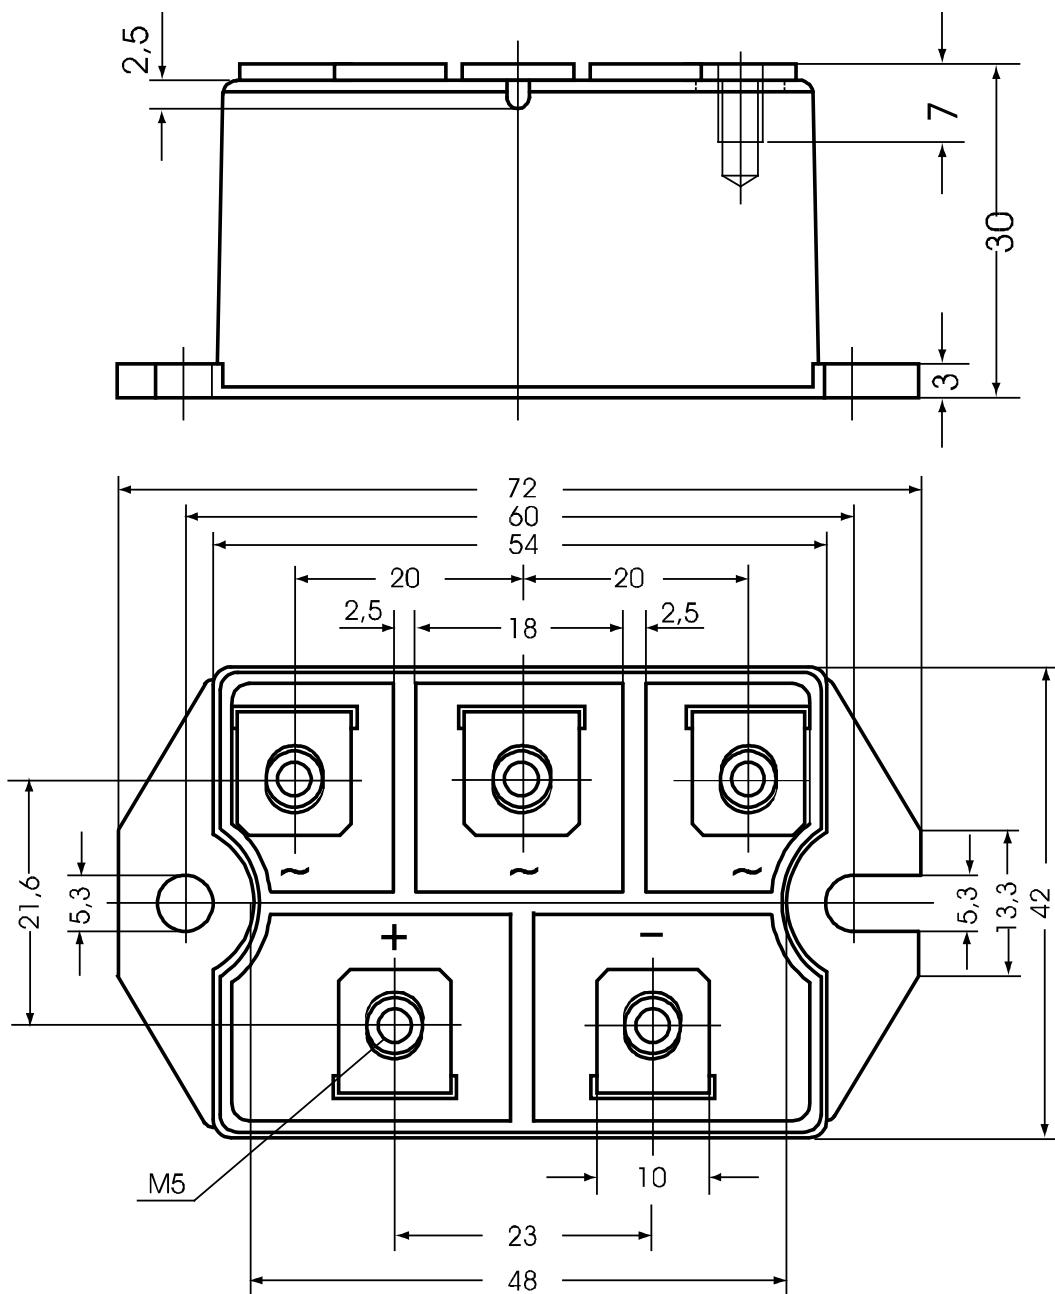mΩ

**Outlines PWS-D**


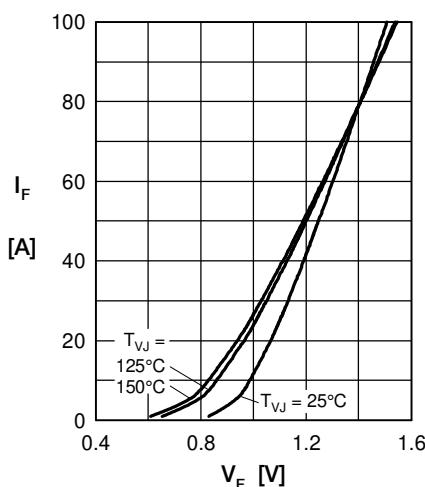
**Rectifier**


Fig. 1 Forward current vs.  
voltage drop per diode

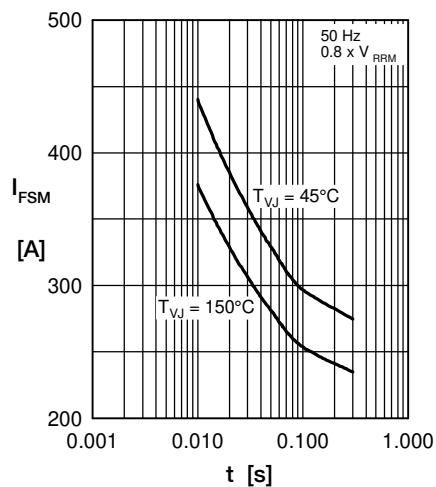


Fig. 2 Surge overload current  
vs. time per diode

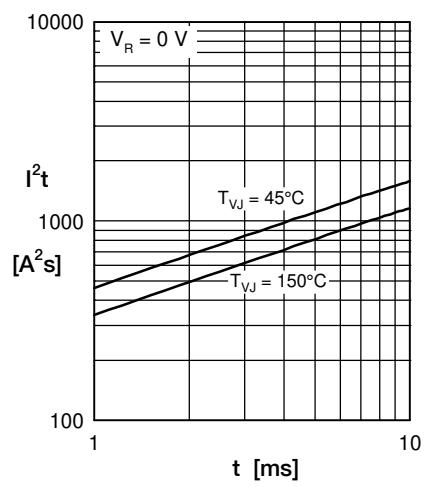


Fig. 3  $I^2t$  vs. time per diode

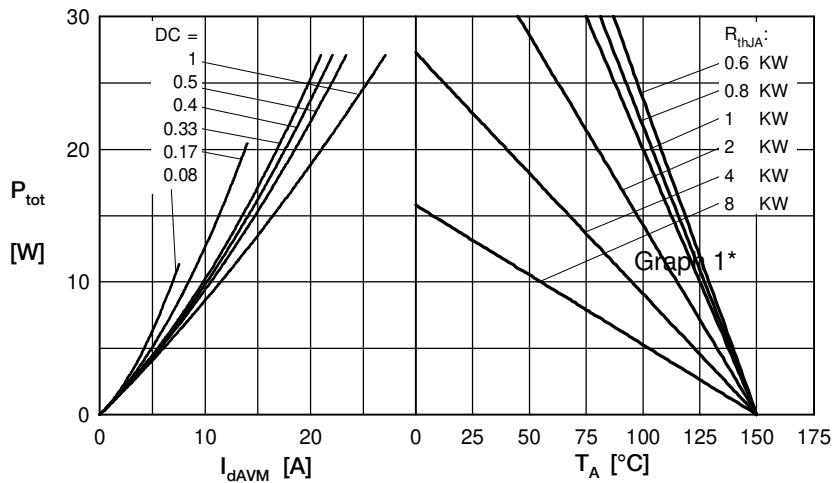


Fig. 4 Power dissipation vs. forward current  
and ambient temperature per diode

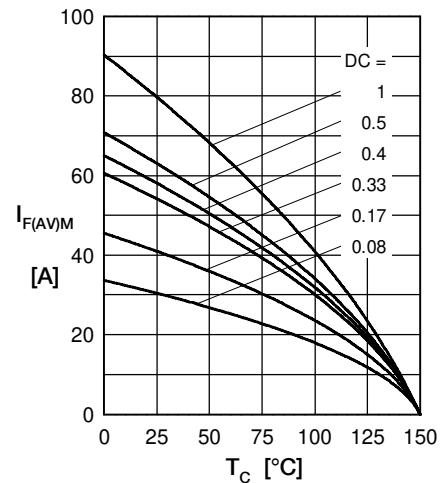


Fig. 5 Max. forward current vs.  
case temperature per diode

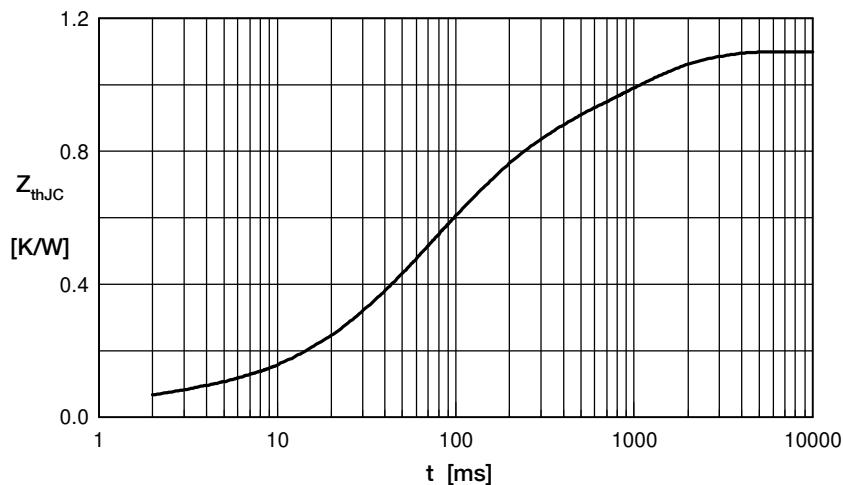


Fig. 6 Transient thermal impedance junction to case vs. time per diode

Constants for  $Z_{thJC}$  calculation:

i	$R_{th}$ (K/W)	$t_i$ (s)
1	0.05	0.001
2	0.14	0.030
3	0.25	0.060
4	0.35	0.130
5	0.31	0.920

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[IXYS:](#)

[VUO62-16NO7](#)