

MDCG-4 15.24mm Sub-miniature Reed Switch


Product Characteristics

Operating Characteristics		
Operate Time ¹		0.6ms - max.
Release Time ¹		0.2ms - max.
Shock ²	11ms 1/2 sine wave	100G - max.
Vibration ²	50-2000 Hertz	30G - max.
Resonant Frequency		3.9kHz - typ.
Magnetic Characteristics		
Pull-In Range ³	Ampere Turns	12-38
Rating Sensitivity ⁴	Ampere Turns	20
Test Coil		L4989

Notes:


- Operate (including bounce)/Release Time - per EIA/NARM RS-421-A, diode suppressed coil (Coil II).
- Shock and Vibration - per EIA/NARM RS-421-A and MIL-STD-202.
- Pull-In Range - Contact Littelfuse for narrower AT ranges available.
- Rating Sensitivity - The value at which contact ratings and operating characteristics are determined. Derating may be required below this value.
- Custom modifications of forming and/or cutting of reed switches are available. Please contact Littelfuse.

Drop-Out vs. Pull-In Chart

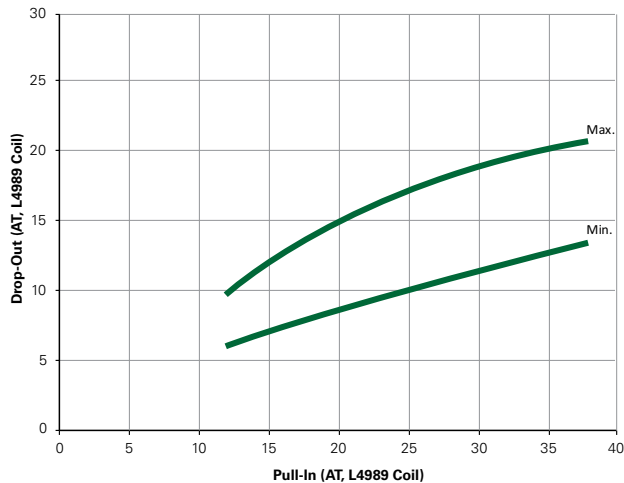

Note: Chart represents the range of Drop-Out, min to max for a given Pull-In value.

Part Numbering System

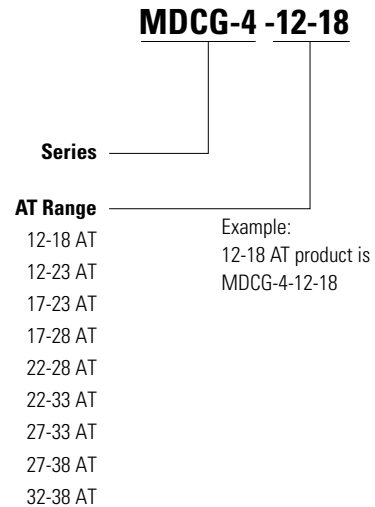

Note: These AT values are the before-modification values of the bare reed switch.

Packaging

Packaging Option	Packaging Specification	Quantity	Quantity & Packaging Code	Taping Width
Bulk	Bulk	1000	N/A	N/A

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

[MDCG-4 17-38](#) [MDCG-4 17-28](#) [MDCG-4 17-23](#) [MDCG-4 12-38](#) [MDCG-4 12-28](#) [MDCG-4 22-28](#) [MDCG-4 22-33](#)
[MDCG-4 32-38](#) [MDCG-4 22-38](#) [MDCG-4 27-38](#) [MDCG-4 12-23](#) [MDCG-4 27-33](#) [MDCG-4 12-18](#) [MDCG-4 12-33](#)
[MDCG-4-12-23](#) [MDCG-4-17-23](#) [MDCG-4-12-18](#) [MDCG-4-12-33](#) [MDCG-4-27-33](#) [MDCG-4-22-28](#) [MDCG-4-12-28](#)
[MDCG-4-27-38](#) [MDCG-4-17-28](#) [MDCG-4-12-38](#) [MDCG-4-32-38](#) [MDCG-4-17-38](#) [MDCG-4-22-38](#) [MDCG-4-22-33](#)
[MDCG-4-7-13](#) [MDCG-4-37-43](#)