

AMERICAS

5810 Van Allen Way
Carlsbad, CA 92008
Telephone: 760-930-4600
Facsimile: 760-930-0698

EUROPE

Astec House, Waterfront Business Park
Merry Hill, Dudley
West Midlands, DY5 1LX, UK
Telephone: 44 (1384) 842-211
Facsimile: 44 (1384) 843-355

ASIA

Units 2111-2116, Level 21
Tower1, Metroplaza
223, Hing Fong Road
Fwai Fong, New Territories
Hong Kong
Telephone: 852-2437-9662
Facsimile: 852-2402-4426



AEH10-30

Ordering Information

| Input Voltage | Output Voltage | Efficiency | Model Number |
|---------------|----------------|------------|--------------|
| 18-36V | 2.5V @ 10A | 86% | AEH10G24 |
| 18-36V | 3.3V @ 10A | 87% | AEH10F24 |
| 18-36V | 5.0V @ 10A | 88% | AEH10A24 |
| 18-36V | 2.5V @ 20A | 85% | AEH20G24 |
| 18-36V | 3.3V @ 20A | 87% | AEH20F24 |
| 18-36V | 5.0V @ 20A | 88% | AEH20A24 |
| 36-72V | 2.5V @ 10A | 86% | AEH10G48 |
| 36-72V | 3.3V @ 10A | 87% | AEH10F48 |
| 36-72V | 5.0V @ 10A | 89% | AEH10A48 |
| 36-72V | 2.5V @ 15A | 85% | AEH15G48 |
| 36-72V | 3.3V @ 15A | 87% | AEH15F48 |
| 36-72V | 5.0V @ 15A | 89% | AEH15A48 |
| 36-72V | 2.5V @ 20A | 87% | AEH20G48 |
| 36-72V | 3.3V @ 20A | 89% | AEH20F48 |
| 36-72V | 5.0V @ 20A | 90% | AEH20A48 |
| 36-72V | 1.8V @ 30A | 82% | AEH30Y48 |
| 36-72V | 2.5V @ 30A | 85% | AEH30G48 |
| 36-72V | 3.3V @ 30A | 87% | AEH30F48 |
| 36-72V | 5.0V @ 30A | 89% | AEH30A48 |

NOTES:

Enable Function

"N" = negative logic enable (without "N" = positive enable)


Pin Assignments

Single Output

1. -Vin
2. Case
3. Enable (on/off)
4. +Vin
5. -5V Rtn
6. -Sense
7. Trim
8. +Sense
9. +5V Out

Notes:

1. 20 mHz bandwidth. An external 2.2 mf ceramic capacitor is recommended to be placed from +V out to -V out.
2. Requires a 2.2 mf, 100V film capacitor connected between +V in and -V in to meet FCC class A and ETS300-386-1 requirements for conducted noise. Consult Factory for filtering information to meet FCC class B, VDE or EIC specifications.
3. All specifications are typical at nominal line, full load, and 25°C unless otherwise noted.
4. All specifications subject to change without notice. Mechanical drawings are for reference only.
5. Please refer to the Technical Reference Notes for more information.
6. Warranty: 1 yr

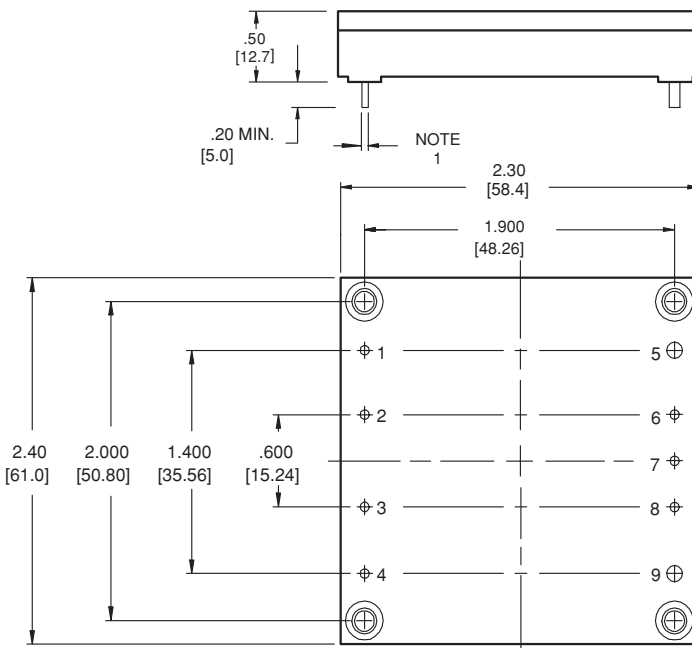

Mounting Inserts
M3 X .5 (4 places)

BOTTOM VIEW

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Artesyn Embedded Technologies:

[AEH15A48](#) [AEH15A48N](#) [AEH15F48](#) [AEH15F48N](#) [AEH15G48](#) [AEH15G48N](#) [AEH20A24](#) [AEH20A24N](#) [AEH20A48](#)
[AEH20A48N](#) [AEH20F24](#) [AEH20F24N](#) [AEH20F48](#) [AEH20F48N](#) [AEH20G24](#) [AEH20G24N](#) [AEH20G48](#)
[AEH20G48N](#) [AEH25B48N](#) [AEH30A48](#) [AEH30A48N](#) [AEH30F48](#) [AEH30F48N](#) [AEH30G48](#) [AEH30G48N](#)