


SMD2016

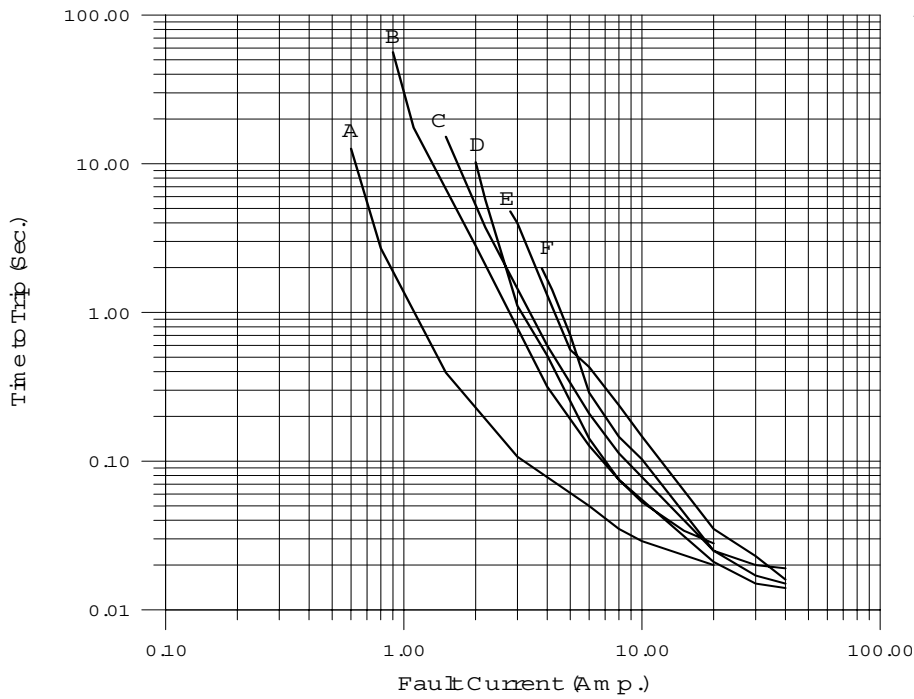

- A: SMD2016P030TF
- B: SMD2016P050TF
- C: SMD2016P100TF
- D: SMD2016P100TF/33
- E: SMD2016P150TF
- F: SMD2016P200TF

Thermal Derating Chart

Model	Ambient Operation Temperature - I_{hold} (A)								
	-40 °C	-20 °C	0 °C	23 °C	40 °C	50 °C	60 °C	70 °C	85 °C
SMD2016P030TF	0.45	0.40	0.35	0.30	0.25	0.23	0.20	0.18	0.14
SMD2016P050TF	0.93	0.80	0.65	0.50	0.38	0.32	0.25	0.19	0.09
SMD2016P100TF	1.66	1.47	1.29	1.10	0.91	0.83	0.73	0.64	0.50
SMD2016P100TF/33	1.66	1.47	1.29	1.10	0.91	0.83	0.73	0.64	0.50
SMD2016P150TF	2.26	2.00	1.76	1.50	1.24	1.13	1.00	0.87	0.68
SMD2016P200TF	2.80	2.50	2.19	2.00	1.84	1.74	1.50	1.34	1.14

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Littelfuse:](#)

[SMD2016P100TF/33A](#) [SMD2016P150TFA](#) [SMD2016P100TFA](#) [SMD2016P030TFA](#) [SMD2016P200TFA](#)