

TISP3xxxT3BJ Overvoltage Protector Series

BOURNS®

Absolute Maximum Ratings, $T_A = 25\text{ °C}$ (Unless Otherwise Noted)

Rating	Symbol	Value	Unit
Repetitive peak off-state voltage, (terminals 1-2 and 3-2)	V_{DRM}	'3070	±58
		'3080	±65
		'3095	±75
		'3115	±90
		'3125	±100
		'3145	±120
		'3165	±135
		'3180	±145
		'3200	±155
		'3219	±180
		'3250	±190
		'3290	±220
		'3350	±275
		'3395	±320
Non-repetitive peak on-state pulse current (see Notes 1 and 2)	I_{PPSM}	2/10 (Telcordia GR-1089-CORE, 2/10 voltage wave shape)	2x250
8/20 (IEC 61000-4-5, combination wave generator, 1.2/50 voltage wave shape)		2x250	
10/160 (TIA/EIA-IS-968 (replaces FCC Part 68), 10/160 μ s voltage wave shape)		2x150	
5/310 (ITU-T K.44, 10/700 μ s voltage wave shape used in K.20/.45/.21)		2x120	
5/320 (TIA/EIA-IS-968 (replaces FCC Part 68), 9/720 μ s voltage wave shape)		2x120	
10/560 (TIA/EIA-IS-968 (replaces FCC Part 68), 10/560 μ s voltage wave shape)		2x100	
10/1000 (Telcordia GR-1089-CORE, 10/1000 voltage wave shape)		2x80	
Non-repetitive peak on-state current (see Notes 1 and 2)	I_{TSM}	50 Hz, 1 cycle	2x25
60 Hz, 1 cycle		2x30	
1000 s 50 Hz/60 Hz a.c.		2x1.2	
Initial rate of rise of on-state current, Linear current ramp, Maximum ramp value < 50 A	di_T/dt	500	A/ μ s
Junction temperature	T_J	-40 to +150	°C
Storage temperature range	T_{stg}	-65 to +150	°C

NOTES: 1. Initially, the device must be in thermal equilibrium with $T_J = 25\text{ °C}$.

2. These non-repetitive rated currents are peak values of either polarity. The rated current values are applied to the terminals 1 and 3 simultaneously (in this case the terminal 2 return current will be the sum of the currents applied to the terminals 1 and 3). The surge may be repeated after the device returns to its initial conditions.

Recommended Operating Conditions

Component	Min	Typ	Max	Unit
Series resistor for GR-1089-CORE first-level surge survival	5			Ω
Series resistor for ITU-T recommendation K.20/.45/.21 (coordination with 400 V GDT at 4 kV)	6.4			
R1, R2 Series resistor for TIA/EIA-IS-968 (replaces FCC Part 68) 9/720 survival	0			
Series resistor for TIA/EIA-IS-968 (replaces FCC Part 68) 10/560 survival	0			
Series resistor for TIA/EIA-IS-968 (replaces FCC Part 68) 10/160 survival	2.5			

TISP3xxxT3BJ Overvoltage Protector Series

BOURNS®

Electrical Characteristics for the 1 and 2 or the 3 and 2 Terminals, $T_A = 25\text{ }^\circ\text{C}$

Parameter	Test Conditions	Min	Typ	Max	Unit
I_{DRM} Repetitive peak off-state current	$V_D = V_{\text{DRM}}$ $T_A = 25\text{ }^\circ\text{C}$ $T_A = 85\text{ }^\circ\text{C}$			± 5 ± 10	μA
$V_{(\text{BO})}$ AC breakover voltage	$dv/dt = \pm 250\text{ V/ms}$, $R_{\text{SOURCE}} = 300\ \Omega$			± 70 ± 80 ± 95 ± 115 ± 125 ± 145 ± 165 ± 180 ± 200 ± 219 ± 250 ± 290 ± 350 ± 395	V
$V_{(\text{BO})}$ Ramp breakover voltage	$dv/dt \leq \pm 1000\text{ V}/\mu\text{s}$, Linear voltage ramp, Maximum ramp value = $\pm 500\text{ V}$ $di/dt = \pm 20\text{ A}/\mu\text{s}$, Linear current ramp, Maximum ramp value = $\pm 10\text{ A}$			± 81 ± 91 ± 107 ± 128 ± 138 ± 159 ± 179 ± 195 ± 215 ± 234 ± 265 ± 304 ± 361 ± 403	V
$I_{(\text{BO})}$ Breakover current	$dv/dt = \pm 250\text{ V/ms}$, $R_{\text{SOURCE}} = 300\ \Omega$			± 800	mA
I_{H} Holding current	$I_T = \pm 5\text{ A}$, $di/dt = \pm 30\text{ mA/ms}$	± 150			mA
dv/dt Critical rate of rise of off-state voltage	Linear voltage ramp, Maximum ramp value $< 0.85V_{\text{DRM}}$	± 5			kV/ μs
I_{D} Off-state current	$V_D = \pm 50\text{ V}$ $T_A = 85\text{ }^\circ\text{C}$			± 10	μA

TISP3xxxT3BJ Overvoltage Protector Series

BOURNS®

Electrical Characteristics for the 1 and 2 or the 3 and 2 Terminals, $T_A = 25\text{ °C}$ (Continued)

Parameter	Test Conditions	Min	Typ	Max	Unit
C_{off} Off-state capacitance	f = 1 MHz, $V_d = 1\text{ V rms}$, $V_D = 0$,	'3070 thru '3095	95	114	pF
		'3115 thru '3219	69	83	
		'3250 thru '3395	51	62	
	f = 1 MHz, $V_d = 1\text{ V rms}$, $V_D = -1\text{ V}$	'3070 thru '3095	90	108	
		'3115 thru '3219	63	76	
		'3250 thru '3395	46	55	
	f = 1 MHz, $V_d = 1\text{ V rms}$, $V_D = -2\text{ V}$	'3070 thru '3095	83	100	
		'3115 thru '3219	59	70	
		'3250 thru '3395	42	51	
	f = 1 MHz, $V_d = 1\text{ V rms}$, $V_D = -50\text{ V}$	'3070 thru '3095	43	51	
		'3115 thru '3219	29	35	
		'3250 thru '3395	20	24	
f = 1 MHz, $V_d = 1\text{ V rms}$, $V_D = -100\text{ V}$ (see Note 3)	'3250 thru '3395	16	19		

NOTE 3: These capacitance measurements employ a three terminal capacitance bridge incorporating a guard circuit. The unmeasured third terminal is connected to the guard terminal of the bridge.

Thermal Characteristics

Parameter	Test Conditions	Min	Typ	Max	Unit
$R_{\theta JA}$ Junction to free air thermal resistance	EIA/JESD51-3 PCB, $I_T = I_{TSM(1000)}$, $T_A = 25\text{ °C}$, (see Note 4)			90	$^{\circ}\text{C/W}$

NOTE 4: EIA/JESD51-2 environment and PCB has standard footprint dimensions connected with 5 A rated printed wiring track widths.

Parameter Measurement Information

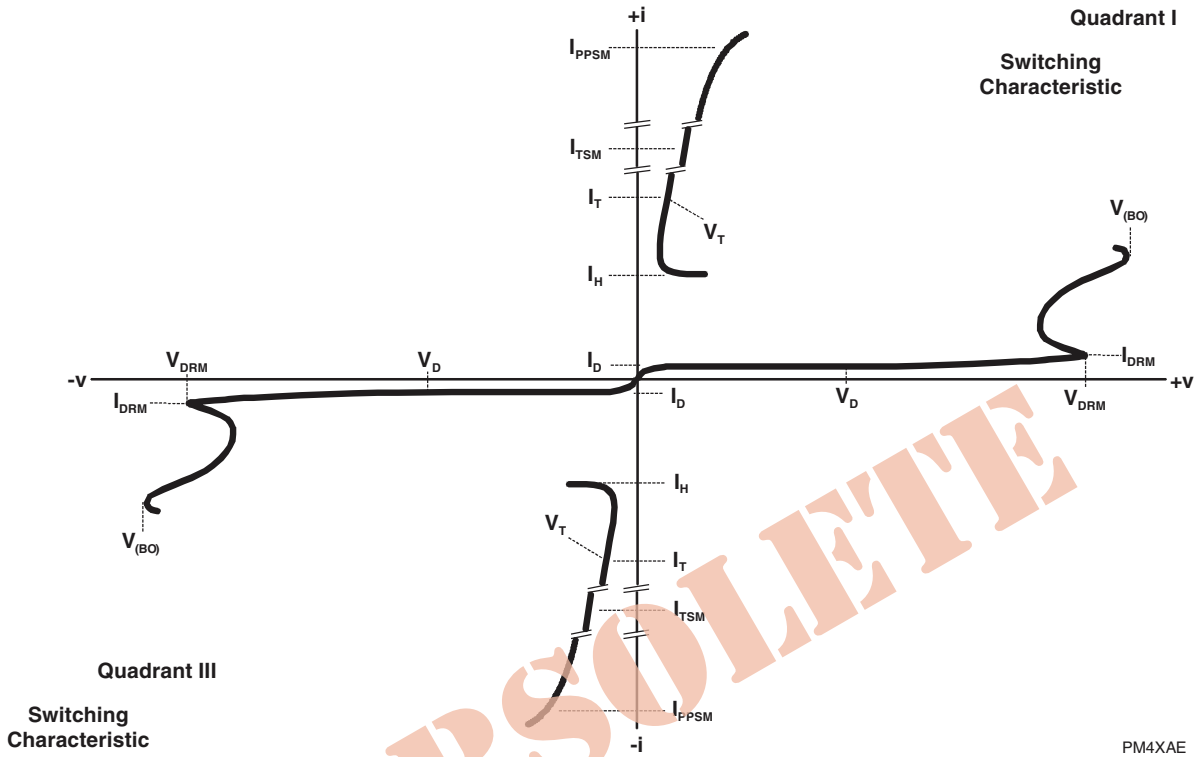


Figure 1. Voltage-Current Characteristic for Terminal Pairs 1-2 and 3-2
All Measurements are Referenced to Terminal 2

PM4XAE

Typical Characteristics

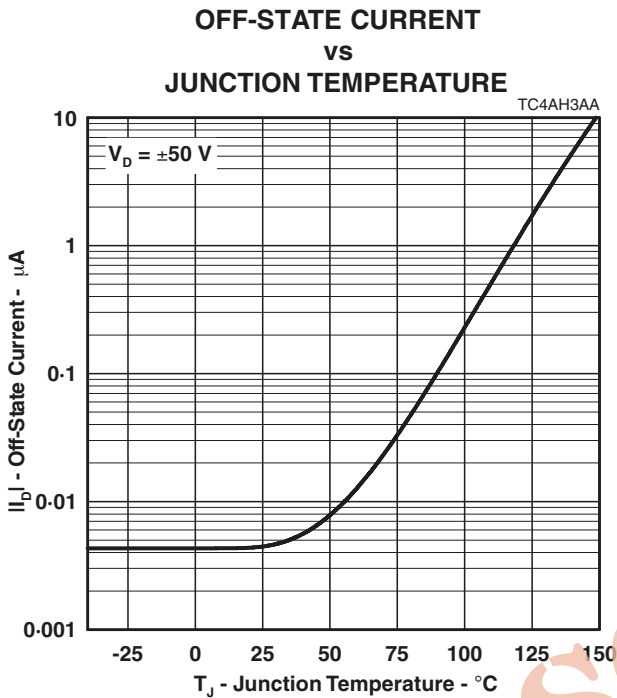


Figure 2.

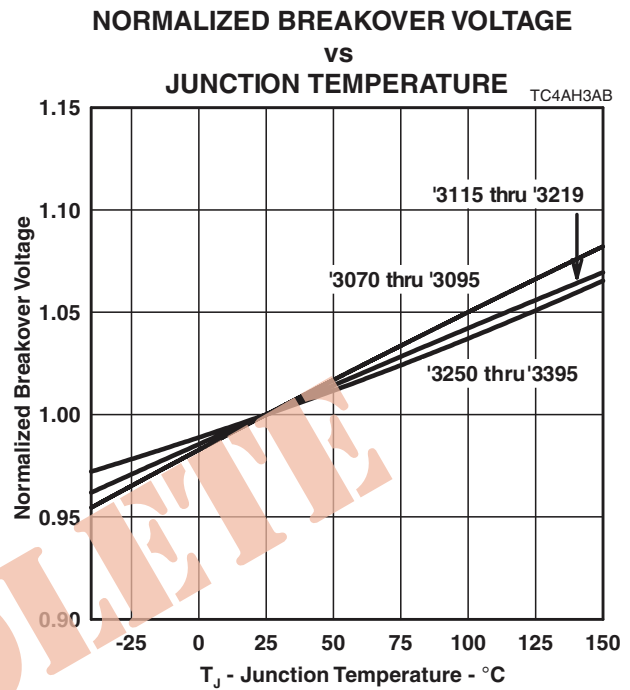


Figure 3.

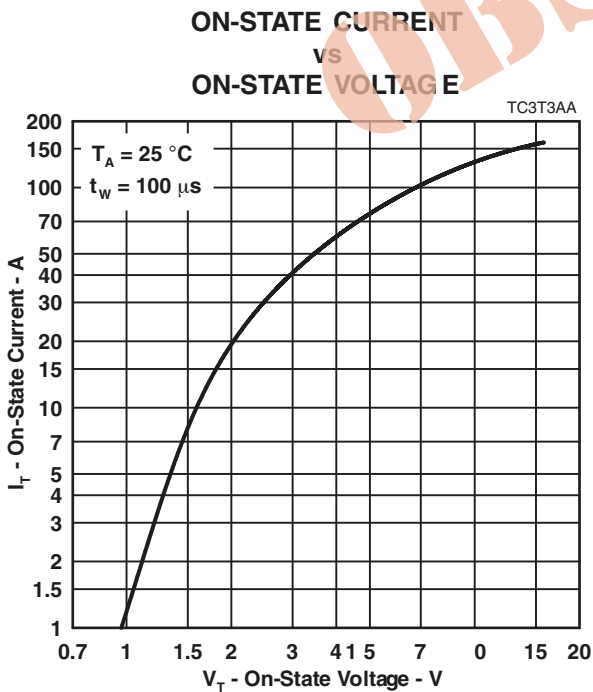


Figure 4.

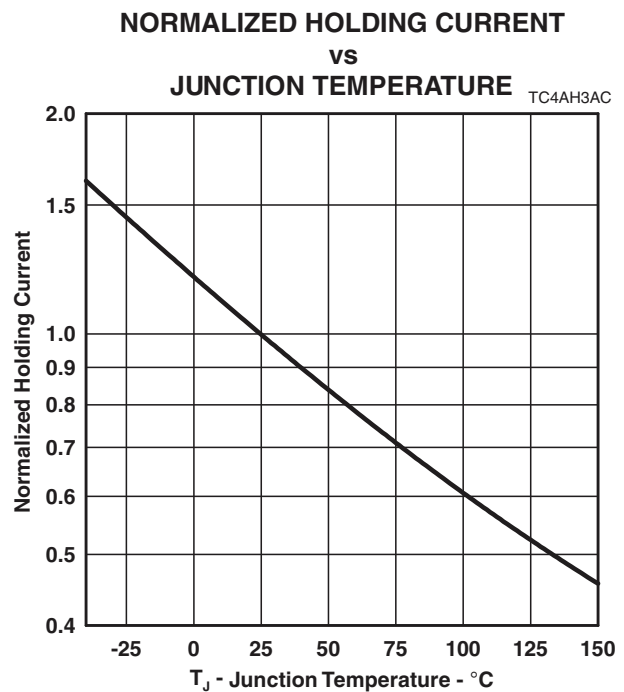


Figure 5.

Rating and Thermal Information

**NON-REPETITIVE PEAK ON-STATE CURRENT
VS
CURRENT DURATION**

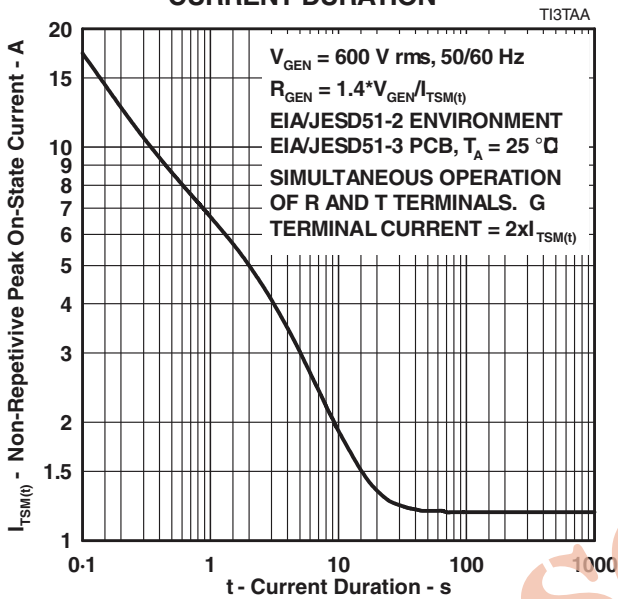


Figure 8.

**V_{DRM} DERATING FACTOR
VS
MINIMUM AMBIENT TEMPERATURE**

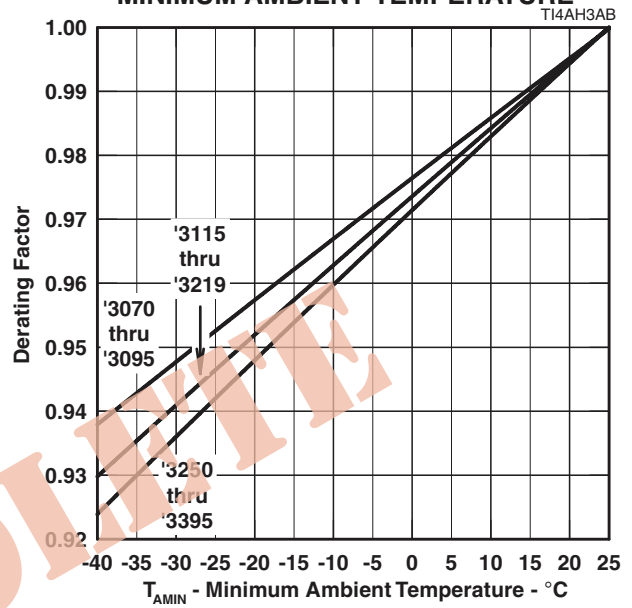



Figure 9.

TISP3xxxT3BJ Overvoltage Protector Series

BOURNS®

MECHANICAL DATA

Recommended Printed Wiring Land Pattern Dimensions

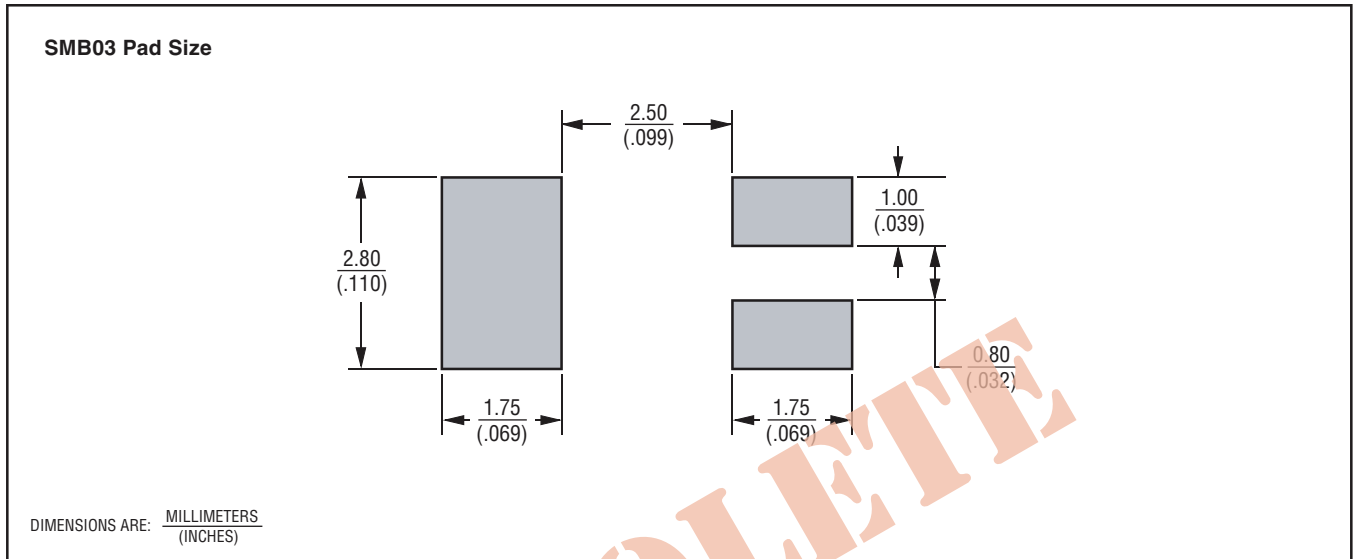

MD3BJAAA

Device Symbolization Code

Devices will be coded as below.

Device	Symbolization Code
TISP3070T3	3070T3
TISP3080T3	3080T3
TISP3095T3	3095T3
TISP3115T3	3115T3
TISP3125T3	3125T3
TISP3145T3	3145T3
TISP3165T3	3165T3
TISP3180T3	3180T3
TISP3200T3	3200T3
TISP3219T3	3219T3
TISP3250T3	3250T3
TISP3290T3	3290T3
TISP3350T3	3350T3
TISP3395T3	3395T3

Carrier Information

For production quantities, the carrier will be embossed tape reel pack. Evaluation quantities may be shipped in bulk pack or embossed tape.

Package	Carrier	Standard Quantity
SMB	Embossed Tape Reel Pack	3000

"TISP" is a trademark of Bourns, Ltd., a Bourns Company, and is Registered in the U.S. Patent and Trademark Office.
"Bourns" is a registered trademark of Bourns, Inc. in the U.S. and other countries.

SEPTEMBER 2001 - REVISED MAY 2011

Specifications are subject to change without notice.

Customers should verify actual device performance in their specific applications.

Bourns Sales Offices

Region	Phone	Fax
The Americas:	+1-909-781-5500	+1-909-781-5700
Europe:	+41(0)41-7685555	+41(0)41-7685510
Asia-Pacific:	+886-2-25624117	+886-2-25624116

Technical Assistance

Region	Phone	Fax
The Americas:	+1-951-781-5500	+1-951-781-5700
Europe:	+41(0)41-7685555	+41(0)41-7685510
Asia-Pacific:	+886-2-25624117	+886-2-25624116

www.bourns.com

Bourns® products are available through an extensive network of manufacturer's representatives, agents and distributors. To obtain technical applications assistance, a quotation, or to place an order, contact a Bourns representative in your area.

BOURNS®

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bourns:

[TISP3219T3BJR](#) [TISP3180T3BJR](#) [TISP3350T3BJR](#) [TISP3350T3BJR-S](#) [TISP3145T3BJR-S](#) [TISP3180T3BJR-S](#)
[TISP3219T3BJR-S](#)