

CMOS Analog Switches

ABSOLUTE MAXIMUM RATINGS

| | |
|------------------------|---------------------------|
| V+ to V- | 36V |
| V+ to VD | 30V |
| VD to V- | 30V |
| VD to VS | ±28V |
| VL to V- | 33V |
| VL to VIN | 30V |
| VL to GND | 20V |
| VIN to GND | 20V |
| Current (any terminal) | 30mA |
| Digital Inputs | (V+ + 0.3V) to (V+ - 38V) |
| VS or VD (Note 1) | -0.3V to (V+ + 0.3V) |

| | |
|---|-----------------|
| Continuous Power Dissipation (TA = +70°C) | |
| Plastic DIP (derate 10.53mW/°C above +70°C) | 842mW |
| Wide SO (derate 20.00mW/°C above +70°C) | 1600mW |
| CERDIP (derate 10.00mW/°C above +70°C) | 800mW |
| Operating Temperature Ranges: | |
| IH50_C_/IH50_AC_ | 0°C to +70°C |
| IH50_M_/IH50_AM_ | -55°C to +125°C |
| Storage Temperature Range | -65°C to +150°C |
| Lead Temperature (soldering, 10sec) | +300°C |

Note 1: Signals on S, D, and digital inputs that exceed V- or V+ will be clamped by internal diodes. Limit forward diode current to 30mA maximum.

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

ELECTRICAL CHARACTERISTICS

(V+ = 15V, V- = -15V, VL = 5V, TA = +25°C, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | IH50_M IH50_AM | | | IH50_C IH50_AC | | | UNITS | |
|---|-----------------------|-------------------------|-------------------|-------|--------|-------------------|------|------|-------|---|
| | | | -55°C | +25°C | +125°C | 0°C | +25C | +70C | | |
| Input Logic Current | IIN(ON) | VIN = 2.4V | ±1 | ±1 | ±10 | ±1 | ±1 | ±10 | µA | |
| | IIN(OFF) | VIN = 0.8V | ±1 | ±1 | ±10 | ±1 | ±1 | ±10 | | |
| Input Logic Low | VIL | | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | 0.8 | V | |
| Input Logic High | VIH | | 2.4 | 2.4 | 2.4 | 2.4 | 2.4 | 2.4 | V | |
| Drain-Source On Resistance | rDS(ON) | IS = 10mA, VD = ±10V | IH5048A only | 25 | 25 | 35 | 30 | 30 | 45 | Ω |
| | | | All others | 40 | 40 | 60 | 45 | 45 | 75 | |
| Channel-to-Channel rDS(ON) Match | ΔrDS(ON) | | 8 (typ) | | | 8 (typ) | | | Ω | |
| Minimum Analog Signal Handling Capability | VANALOG | | ±14 | ±14 | ±14 | ±14 | ±14 | ±14 | V | |
| Switch-Off Leakage Current | ID/IS(OFF) | VANALOG = -10V to 10V | ±1 | | ±100 | ±5 | | ±100 | nA | |
| Switch-On Leakage Current | ID(ON) + IS(ON) | VD = VS = -10V to 10V | ±2 | | ±200 | ±10 | | ±200 | nA | |
| Switch-On Time | tON | Figure 1 | 400 | | | 600 | | | ns | |
| Switch-Off Time | tOFF | Figure 1 | 200 | | | 300 | | | ns | |
| Charge Injection | QINJ | Figure 2 (Note 2) | 10 (typ) | | | 10 (typ) | | | pC | |
| Minimum Off-Isolation Rejection Ratio | OIRR | Figure 3, CL < 5pF | 54 (typ) | | | 50 (typ) | | | dB | |

CMOS Analog Switches

IH5048-IH5051

ELECTRICAL CHARACTERISTICS (continued)


(V+ = 15V, V- = -15V, VL = 5V, TA = +25°C, unless otherwise noted.)

| PARAMETER | SYMBOL | CONDITIONS | IH50_M IH50_AM | | | IH50_C IH50_AC | | | UNITS |
|---|--------|--------------------------|-------------------|-------------|--------|-------------------|-------------|------|-------|
| | | | -55°C | +25°C | +125°C | 0°C | +25C | +70C | |
| V+ Quiescent Current | I+Q | VIN = 0V or 5V | 1 | 1 | 10 | 10 | 10 | 100 | μA |
| V- Quiescent Current | I-Q | VIN = 0V or 5V | -1 | -1 | -10 | -10 | -10 | -100 | μA |
| +5V Quiescent Current | ILQ | VIN = 0V or 5V | 1 | 1 | 10 | 10 | 10 | 100 | μA |
| Ground Quiescent Current | IGND | VIN = 0V or 5V | 1 | 1 | 10 | 10 | 10 | 100 | μA |
| Minimum Channel-to-Channel Cross-Coupling Rejection Ratio | CCRR | One channel off (Note 2) | | 54 (typ) | | | 50 (typ) | | dB |


Note 2: Not production tested.

Typical Operating Characteristics


DRAIN-SOURCE ON RESISTANCE vs. ANALOG SIGNAL

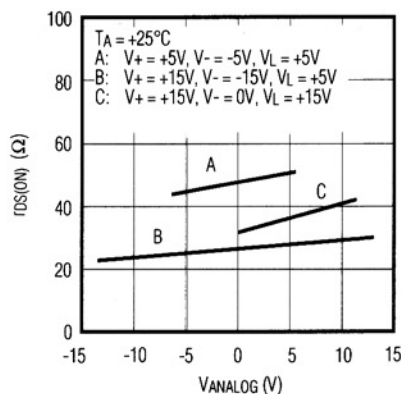

CHARGE INJECTION vs. ANALOG SIGNAL

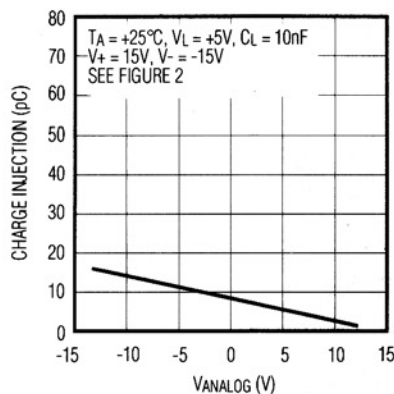

OFF-ISOLATION REJECTION RATIO (OIRR)

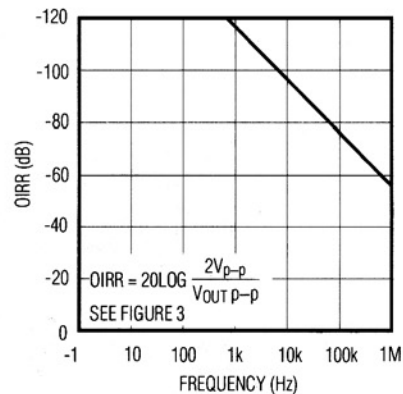

Test Circuits

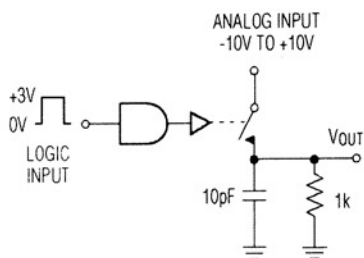


Figure 1. Switching Time




Figure 2. Charge Injection


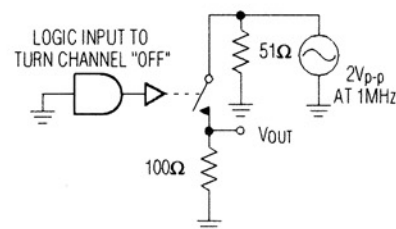


Figure 3. Off-Isolation Rejection Ratio


CMOS Analog Switches

Pin Configurations & Switching-State Diagrams (continued)

TOP VIEW




| LOGIC | SWITCH 1 | SWITCH 2 |
|-------|----------|----------|
| 0 | OFF | ON |
| 1 | ON | OFF |



| LOGIC | SWITCH 1, SWITCH 2 | SWITCH 3, SWITCH 4 |
|-------|--------------------|--------------------|
| 0 | OFF | ON |
| 1 | ON | OFF |

SWITCH STATES ARE FOR LOGIC "1" INPUTS (POSITIVE LOGIC)

Chip Topography

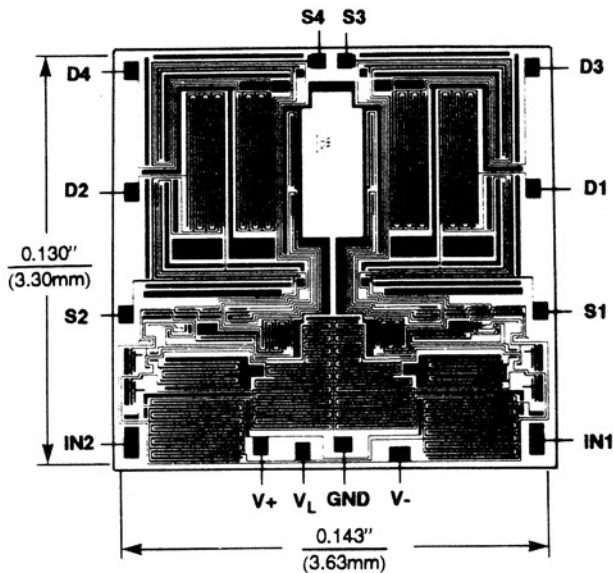

Ordering Information (continued)

| PART | TEMP. RANGE | PIN-PACKAGE |
|------------------|-----------------|----------------|
| IH5049CPE | 0°C to +70°C | 16 Plastic DIP |
| IH5049CWE | 0°C to +70°C | 16 Wide SO |
| IH5049CJE | 0°C to +70°C | 16 CERDIP |
| IH5049C/D | 0°C to +70°C | Dice* |
| IH5049MJE | -55°C to +125°C | 16 CERDIP** |
| IH5050CPE | 0°C to +70°C | 16 Plastic DIP |
| IH5050CWE | 0°C to +70°C | 16 Wide SO |
| IH5050CJE | 0°C to +70°C | 16 CERDIP |
| IH5050C/D | 0°C to +70°C | Dice* |
| IH5050MJE | -55°C to +125°C | 16 CERDIP** |
| IH5051CPE | 0°C to +70°C | 16 Plastic DIP |
| IH5051CWE | 0°C to +70°C | 16 Wide SO |
| IH5051ACJE | 0°C to +70°C | 16 CERDIP |
| IH5051AC/D | 0°C to +70°C | Dice* |
| IH5051MJE | -55°C to +125°C | 16 CERDIP** |

* Contact factory for dice specifications.

** Contact factory for availability and processing to MIL-STD-883.

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

4 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 (408) 737-7600

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Maxim Integrated:](#)

[IH5050CPE+](#) [IH5049CPE+](#) [IH5051MLP/883B](#) [IH5051MJE](#)