

Electrical Characteristics (at TA=25°C unless otherwise noted)

Parameter	Conditions	Symbol	Min	Typ	Max	Unit
Reverse stand-Off voltage		$V_{RWM}^{(1)}$			5	V
Breakdown voltage	$I_T = 1\text{mA}$	$V_{(BR)}$	6.5		8.8	V
	$I_T = 1\text{mA } V_{CC} \text{ to GND}$		5.8		8.1	V
Reverse leakage current	$V_{RWM} = 5\text{ V}$ (I/O to GND & V_{CC} to GND)	I_R			1	μA
Forward voltage	$I_F = 10\text{ mA}$ (I/O to GND & V_{CC} to GND)	V_F	0.5		1.0	V
Clamping voltage	$I_{PP} = 1\text{ A}$ (I/O to GND & V_{CC} to GND)	$V_C^{(2)}$			15	V
	$I_{PP} = 5\text{ A}$ (I/O to GND & V_{CC} to GND)				25	
Junction capacitance	$V_R = 0\text{V}, f = 1\text{MHz}$	C_j			0.8	pF
	$V_R = 0\text{V}, f = 1\text{MHz}, I/O \text{ to } I/O$				0.4	

Notes: 1. Other voltages available upon request.

2. Non-repetitive current pulse 8/20 μs exponential decay waveform according to IEC61000-4-5.

RATING AND CHARACTERISTIC CURVES (CPDT6-5V0USP-HF)

Fig.1 - 8/20us Peak Pulse Current
Wave Form Acc. IEC 61000-4-5

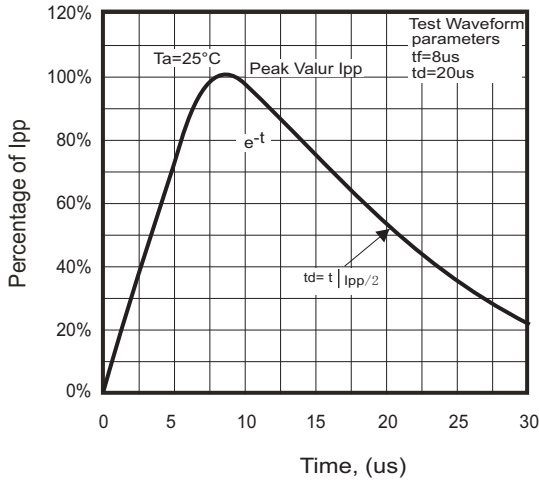


Fig.2 - Power Derating Curve

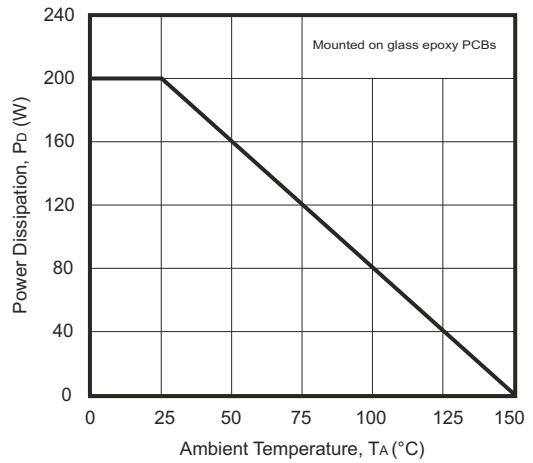


Fig.3 - Capacitance Characteristics






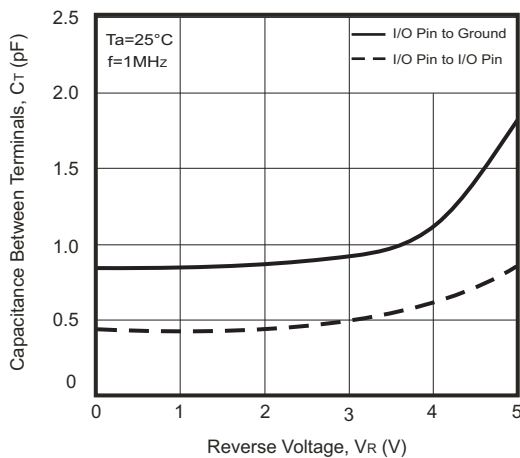


Fig.4 - Clamping Voltage Vs. Peak Pulse Current

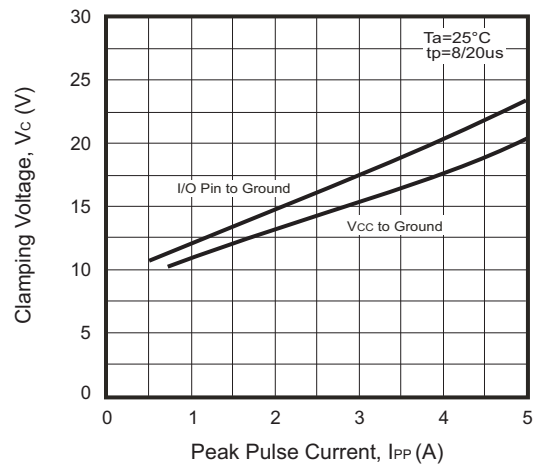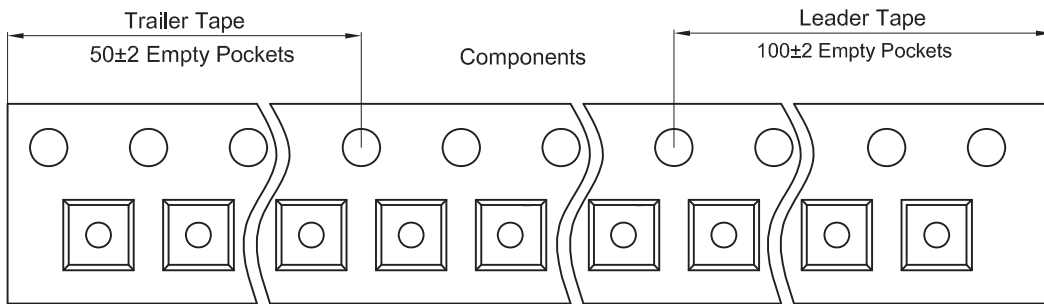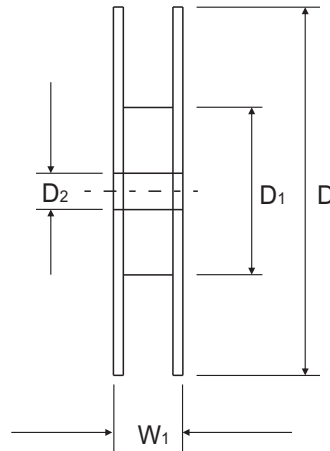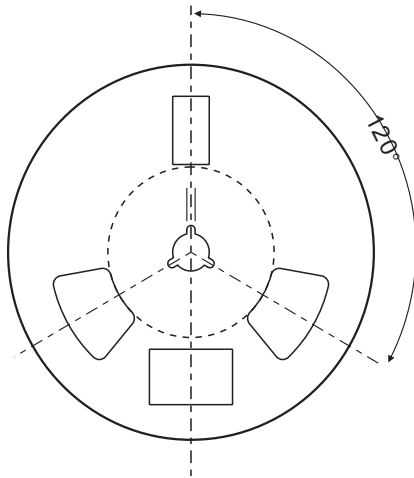

Reel Taping Specification

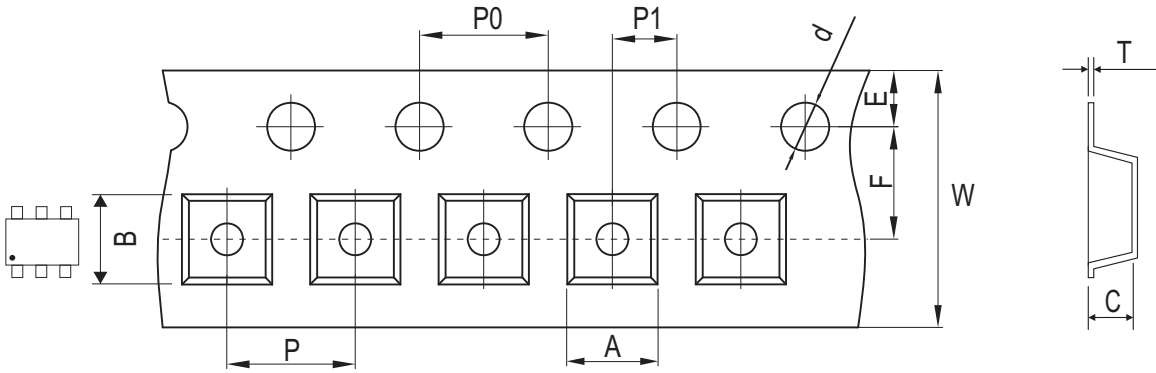


SOT-23-6	SYMBOL	A	B	C	d	D	D1	D2
	(mm)	3.17 ± 0.10	3.23 ± 0.10	1.37 ± 0.10	1.50 ± 0.05	180.0 + 0.00 / - 0.30	60.00 ± 0.50	13.00 ± 0.20
	(inch)	0.125 ± 0.004	0.127 ± 0.004	0.054 ± 0.004	0.059 ± 0.002	7.087 + 0.00 / - 0.012	2.362 ± 0.020	0.512 ± 0.008

SOT-23-6	SYMBOL	E	F	P	P0	P1	W	W1
	(mm)	1.75 ± 0.10	3.50 ± 0.05	4.00 ± 0.10	4.00 ± 0.10	2.00 ± 0.05	8.00 + 0.30 / - 0.10	12.30 ± 0.20
	(inch)	0.069 ± 0.004	0.138 ± 0.002	0.157 ± 0.004	0.157 ± 0.004	0.079 ± 0.002	0.315 + 0.012 / - 0.004	0.484 ± 0.008

Marking Code

Part Number	Marking Code
CPDT6-5V0USP-HF	U5H4




U5H4 = Product type marking code

● = Pin 1 indicator

Suggested PAD Layout

SIZE	SOT-23-6	
	(mm)	(inch)
A	1.00	0.039
B	0.70	0.028
C	0.95	0.037
D	2.40	0.094
E	3.40	0.134

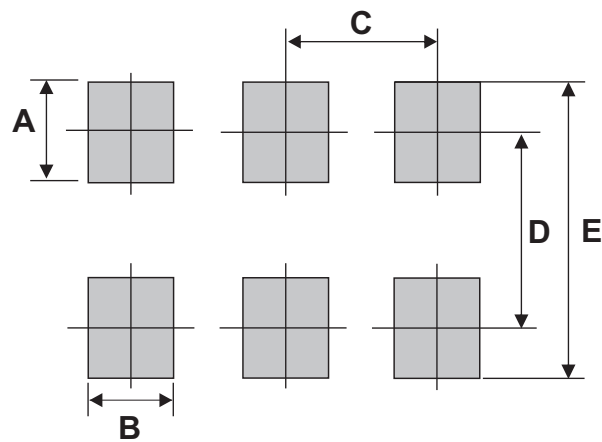

Standard Packaging

Case Type	REEL PACK	
	REEL (pcs)	Reel Size (inch)
SOT-23-6	3,000	7

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Comchip Technology:](#)

[CPDT6-5V0USP-HF](#)