


»» Specification

Contact material	AgSnO alloy	
Contact voltage drop ⁽¹⁾	Typ. 50mV at 10A	
Operate time ⁽¹⁾	10 ms Max.	
Release time ⁽¹⁾	5 ms Max.	
Insulation resistance ⁽¹⁾	100 MΩ Min. (DC 500V)	
Dielectric strength ⁽¹⁾	Between open contact	: AC 500V , 50/60Hz 1 min.
	Between contact and coil	: AC 500V , 50/60Hz 1 min.
Vibration resistance	Operating extremes	10~500Hz , 4.4G
	Damage limits	10~500Hz , 4.4G
Shock resistance	Operating extremes	10G
	Damage limits	100G
Life expectancy	Mechanical	10,000,000 operations (frequency 18,000 operations/hr)
	Electrical	100,000 operations (frequency 360 operations/hr)
Operating ambient temperature	-40~+125°C (no freezing)	
Weight	Approx. 4 g	






Note : (1) Initial value. Operate and release time excluding contact bounce.

»» Outline Dimensions

◆103




◆103T

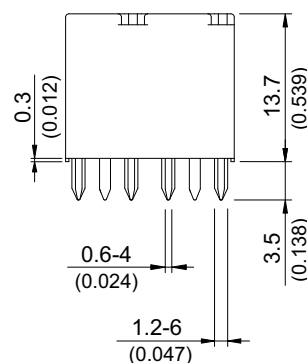


»» Wiring Diagram

BOTTOM VIEW

◆103




◆103T




»» PC Board Layout

BOTTOM VIEW






◆103



◆103T

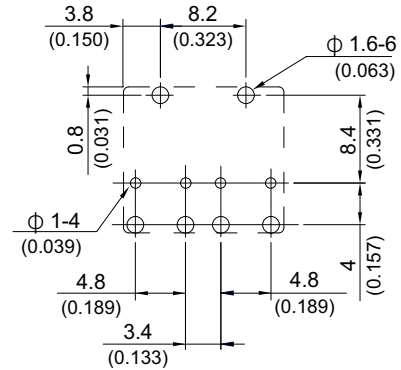

»» Engineering Data

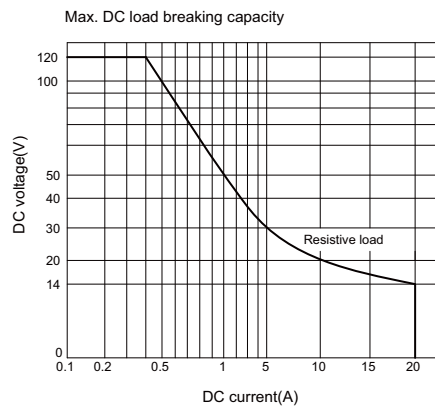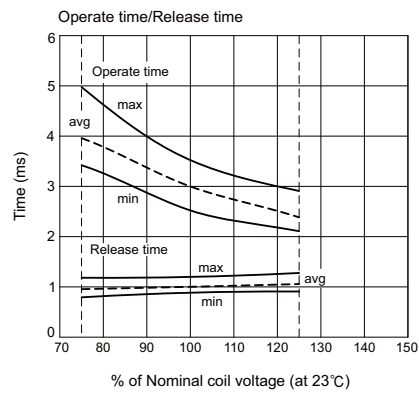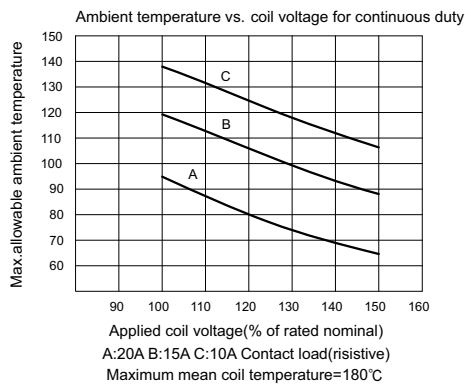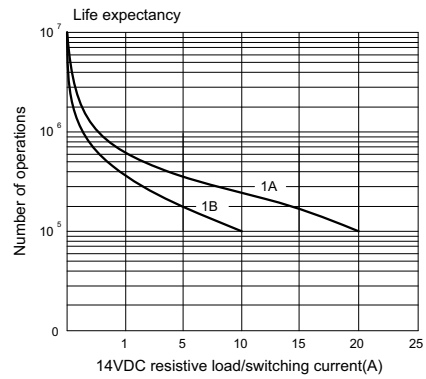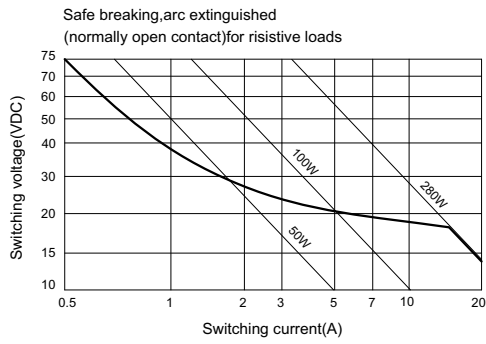

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Song Chuan:](#)

[103T-1CH-S-12VDC](#) [103-1CH-S-12VDC](#) [103-1CH-C-12VDC](#) [103T-1CH-C-12VDC](#) [103T-1AH-C-24VDC](#) [103-1AH-C-12VDC](#) [103T-1CH-C-24VDC](#) [103-1CH-C-24VDC](#)