
THE INFORMATION CONTAINED HEREIN IS CONSIDERED 'PROPRIETARY' TO BEL FUSE INC. AND SHALL NOT BE COPIED, REPRODUCED OR DISCLOSED WITHOUT THE WRITTEN APPROVAL OF BEL FUSE INC.

SUGGESTED PCB PAI

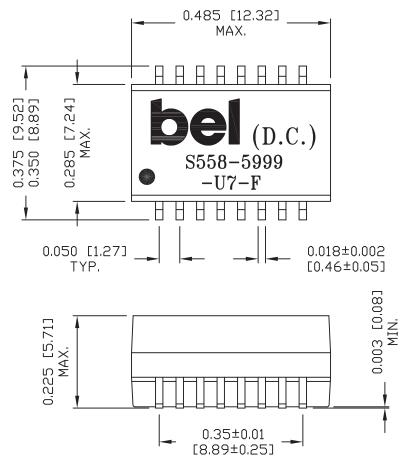

0.050 [1. [10,80] 0,425 0.025 [0.62] 0.012 [0.30] 0.008 [0.20]

DIM. []

UNI

- 1. STANDARD MARKING REFER TO DOC. HAND-WORK-04.
- 2. PACKAGE CODE: "QBS001".
- 3. THIS PRODUCT HAS BEEN SUPPLYING TO JAPAN CUSTOMERS. PCN PROCESS NEEDS TO COMPLY WITH 4M CRITERIA.

	TRECESS NEEDS	I O O O O O O O O O O O O O O O O O O O			
ORIGINATED	BY DATE	TITLE	PART NO. / DRAWING NO.	STAND	ARD DIM.
Lawrence	Tsang 2015-07-16	MECHANICAL DRAWING	X5585999U7-F	TOL. IN INCH	
DRAWN BY	DATE	INCCIDINICAL DIAMING	FILE NAME	.x	
		S558-5999-U7-F		.XX	±0.01
ZC Guo	2015-07-16		X5585999U7FF.DWG	.xxx	±0.005

NOTES:

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Bel:

S558-5999-U7-F