Single Turn Trimmer


Model 22



Mechanical

Mechanical Stop	Solid
Mechanical Rotation	250° nominal
Stop Strength	1.3 in. oz Min (300 g-cm)
Torque	0.65 in. oz. Max. (150 g-cm)
Weight	0.002 oz. nominal (0.14 grams)
Wiper Position	Approximately 50% of Rt

Ordering Information

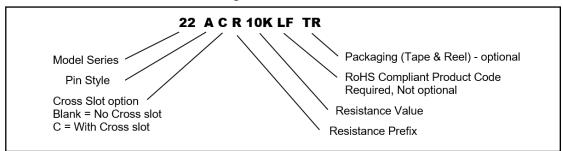

Packaging Information


Standard (no code): Boxes. Capacity = 100 units.

Option (TR code): Tape & Reel. All units oriented with #2 (slider) pin adjacent to sprocket holes.

	Pin Style	Α	S
Таре	Width =	12 mm	16 mm
	Sprocket =	4 mm pitch	4 mm pitch
	Capacity =	1000 units	200 units
Reel	Diameter =	7" (178 mm)	10" (254 mm)

Circuit Diagram

Standard Resistance Values, Ohms



_	10	100	1K	10K	100K	1 Meg
	20	200	2K	20K	200K	2 Meg
	50	500	5K	50K	500K	


Single Turn Trimmer

Model 22




Outline Drawings

Model 22A — Top Adjust

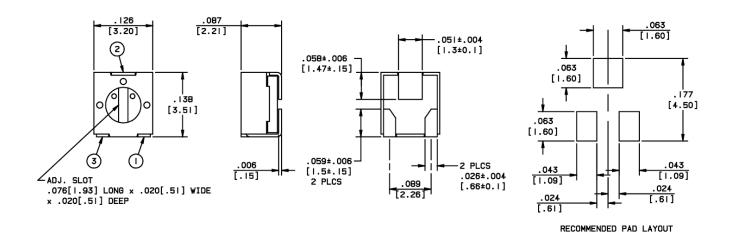

Model 22S—Side Adjust

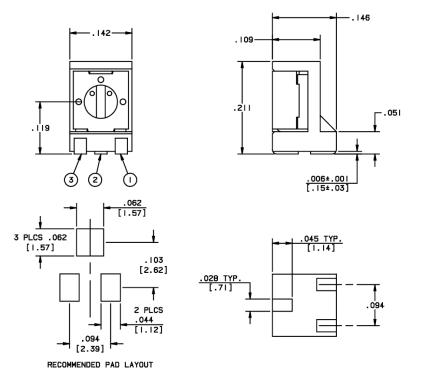

Issue C 11/2020 Page 3


Single Turn Trimmer


Model 22



Outline Drawings


Model 22AC—With Cross Slot adjustment

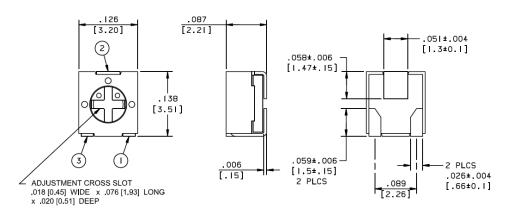





RECOMMENDED PAD LAYOUT

Model 22SC—With Cross Slot adjustment

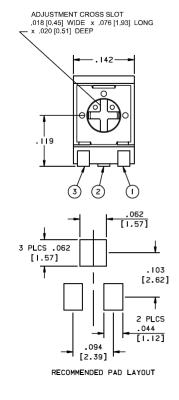





Issue C 11/2020 Page 4

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

22SR10KLFTR 22AR500LFTR 22AR100LFTR 22AR2KLFTR 22AR100KLFTR 22AR500KLFTR 22AR200KLFTR 22AR20KLFTR 22AR20KLFTR 22AR20KLFTR 22AR20KLFTR 22AR20KLFTR 22AR20KLFTR 22AR50KLFTR 22SR100LFTR 22SR5KLFTR