

### Packaging Information

**Standard:** Boxes  
Capacity = 100 Units

**Option:** Tubes  
All units oriented with #1 pin to same side.


	Pin Style	P, PM	X, XL, XW, RW
Magazine	Width	= 0.47"	0.29"
	Height	= 0.54"	0.76"
	Length	= 20.5"	20.1"
	Capacity	= 50 Units	50 Units

**Option:** Tape & Reel, Ammo Pack (Available only for 72RW only)  
All units oriented with #1 pin to the right of the direction of feed.

	Seat Plane to Centerline of Sprocket Hole	= .71" (18.03 mm)
Tape	Width	= 18 mm
	Sprocket	= Single Hole .50" spacing
	Capacity	= 1,000 Units
Reel	Diameter	= 14" (356mm)
Ammo	Tape Fold	= 12" (305mm)
Box		= 1.8" x 13" x 10" (46mm x 330mm x 254mm)


#### EXTENDED ROTOR OPTION (Inch/mm)

Available for all Model 72 pin styles:  
72PE, 72PLE, 72PME, 72PXE, 72RPXE, 72XE, 72RXE, 72XLE, 72RXLE, 72RWE, 72XWE, 72RXWE

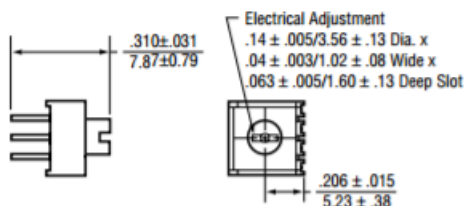

#### ADJUSTMENT KNOB OPTION (Inch/mm)

Available options:  
72XT- Side Adjustment (See 72X for Pin Configuration)  
72PT- Top Adjustment (See 72P for Pin Configuration)

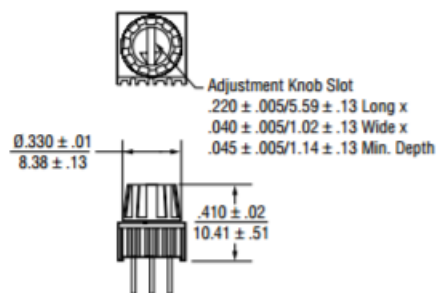






72PT Shown - Dimensions applicable to 72XT

#### General Note


TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

© TT electronics plc

### Outline Drawings—Top Adjustment

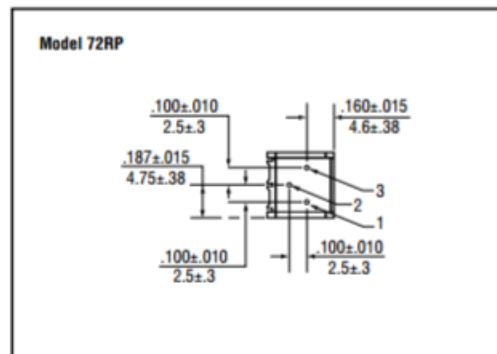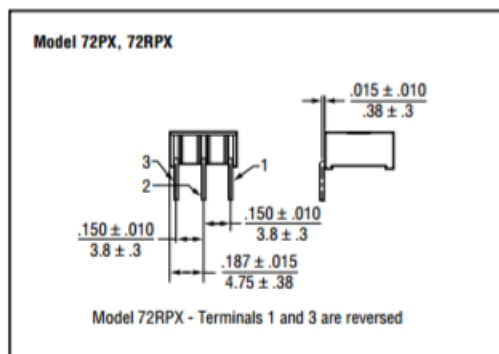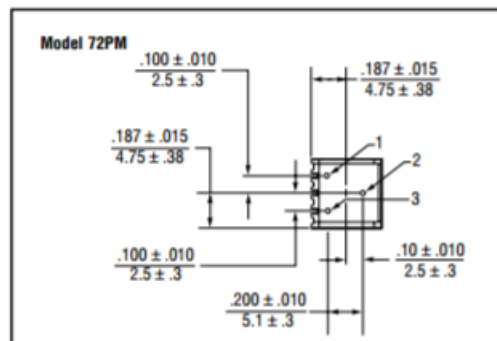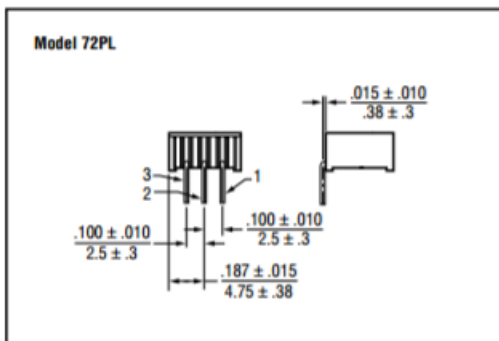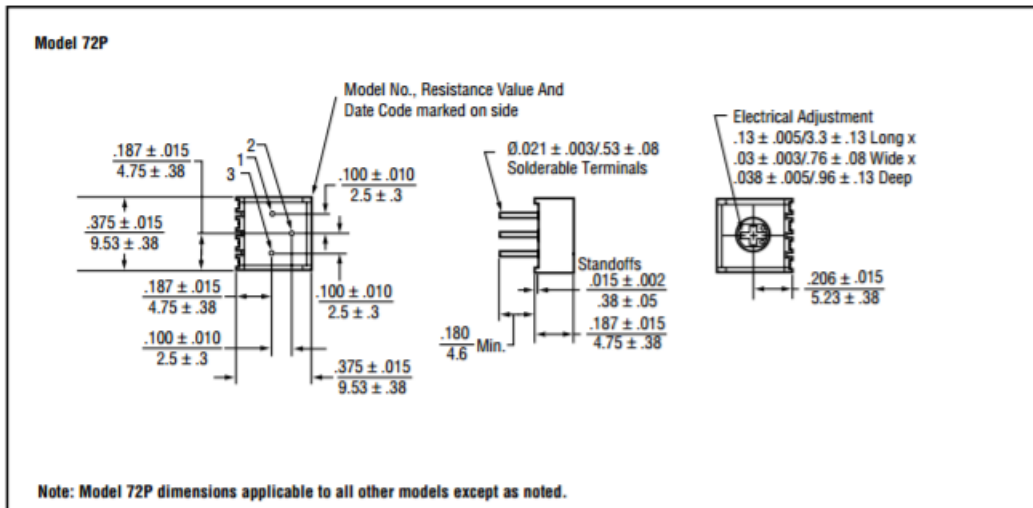


### Outline Drawings—Side Adjustment

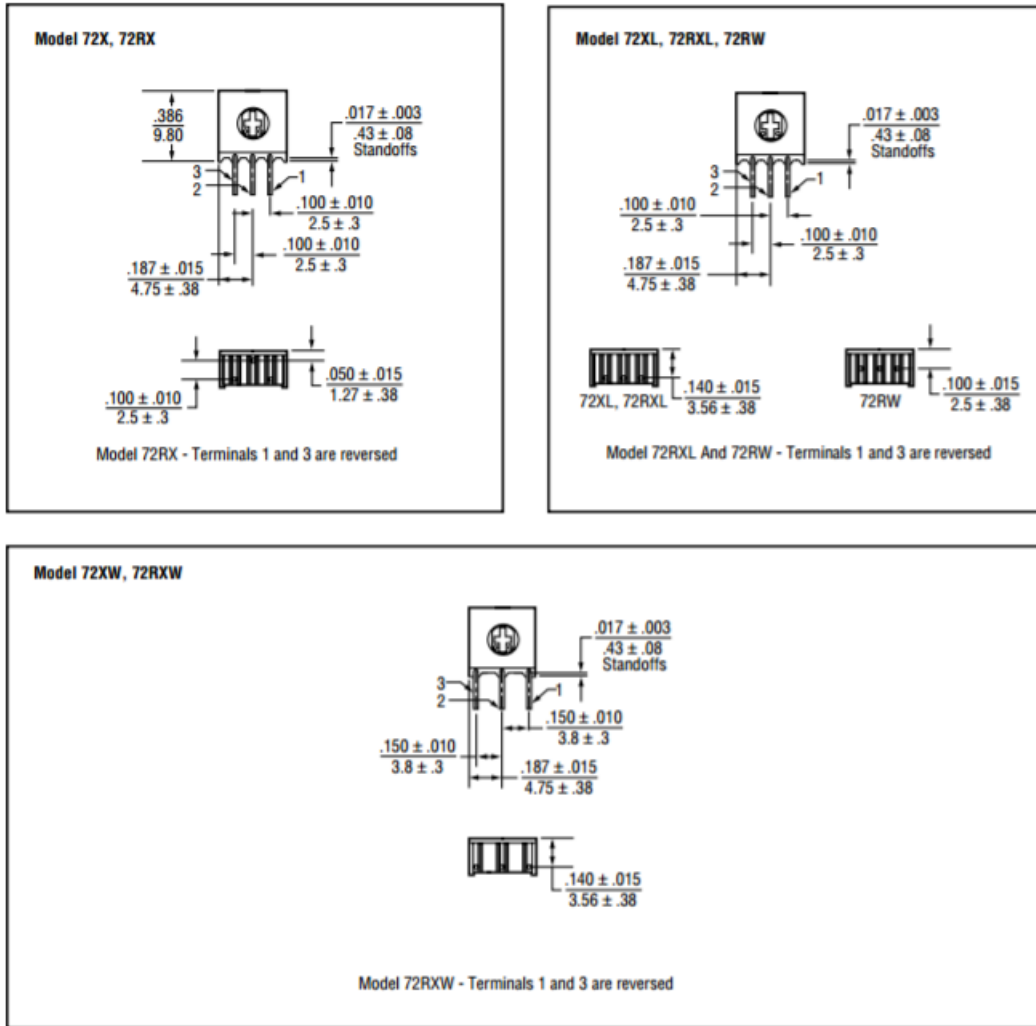


### Ordering Information


**Standard:**

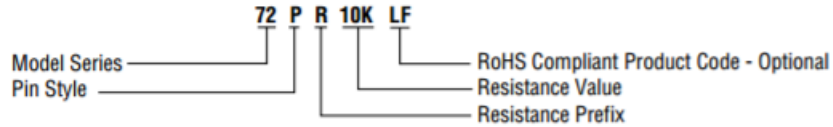


**Option:**

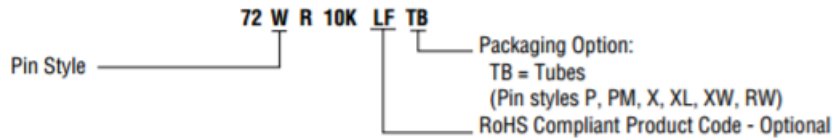

**Option:**

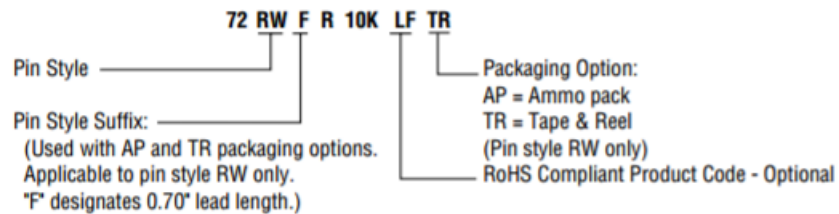

**Option:**

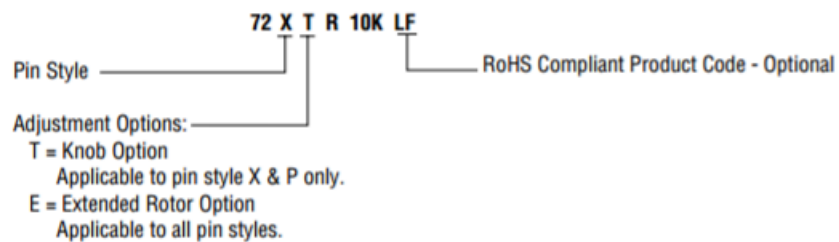

### Standard Resistance Values, Ohms

10	100	1K	10K	50K	250K
20	200	2K	20K	100K	500K
50	500	5K	25K	200K	1Meg


### Circuit Diagram



#### NOTES

Metric equivalents, based on 1 inch = 25.4mm are rounded to the same number of significant figures as in the original English units and are provided for general information only.

Tolerances unless otherwise specified:  
 Linear = ± .01 inches (.25mm)  
 Angular = ± 2 degrees



**General Note**

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## TT Electronics:

[72PXR1KLF](#) [72RXWR25KLF](#) [72XWR2KLF](#) [72XWR50](#) [72PLR100KLF](#) [72PLR20KLF](#) [72PR100KLFTB](#)  
[72PR1KLFTB](#) [72PR1MEGLF](#) [72PR200KLFTB](#) [72PR20KLFTB](#) [72PR500LFTB](#) [72PR50KLFTB](#) [72PTR10KLF](#)  
[72PTR250KLF](#) [72PTR2KLF](#) [72PTR500LF](#) [72RPR1KLF](#) [72RPXR20KLF](#) [72RPXR50KLF](#) [72RWR10KLF](#)  
[72RXLR5KLF](#) [72RXR100LF](#) [72RXR10KLF](#) [72RXR2KLF](#) [72RXR5KLF](#) [72XLR100LF](#) [72XLR1KLF](#) [72XTR20KLF](#)  
[72XWR100LF](#) [72XWR100KLF](#) [72XWR10KLF](#) [72XWR1KLF](#) [72XWR20LF](#) [72XWR200LF](#) [72XWR200KLF](#)  
[72XWR20KLF](#) [72XWR20LFTB](#) [72XWR500KLF](#) [72XWR50KLF](#) [72XWR5KLF](#) [72PR20KLF](#) [72PMR10KLF](#)  
[72XR250KLF](#) [72PR250KLF](#) [72XR50KLF](#) [72PMR2KLF](#) [72PMR200KLF](#) [72PMR20KLF](#) [72PMR100LF](#) [72PMR20LF](#)  
[72PMR50LF](#) [72XR500LF](#) [72PR200LF](#) [72PMR200LF](#) [72PR50KLF](#) [72XR200KLF](#) [72PR200KLF](#) [72PMR25KLF](#)  
[72PR100LF](#) [72PR25KLF](#) [72PR1KLF](#) [72XR200LF](#) [72PR10LF](#) [72PR10KLF](#) [72PMR500KLF](#) [72XR20KLF](#)  
[72PR500LF](#) [72PMR100KLF](#) [72XR500KLF](#) [72PR500KLF](#) [72PR50LF](#) [72XR50LF](#) [72XR100KLF](#) [72PR100KLF](#)  
[72XR1KLF](#) [72PR2KLF](#) [72PMR10LF](#) [72XR10KLF](#) [72PMR50KLF](#) [72XR2KLF](#) [72XR20LF](#) [72XR100LF](#) [72XR25KLF](#)  
[72PMR1KLF](#) [72XR10LF](#) [72PR20LF](#) [72PMR500LF](#) [72PR5KLF](#) [72PMR5KLF](#) [72XR5KLF](#) [72PR200LFTB](#)  
[72RWR200LFTB](#) [72XLR5KLFTB](#) [72RWR100LFTB](#) [72RWR2KLF](#) [72PXR100KLF](#) [72PXR10KLF](#) [72RPXR20LF](#)  
[72XWR2KLFTB](#)