

Electrical Characteristics ($T_J = 25^\circ\text{C}$, unless otherwise specified)

Symbol	Parameter	Test Conditions		Value	Unit
t_{rr}	Reverse-recovery Time	$I_F = 0.9\text{A}$, $I_R = 1.5\text{A}$	TYP.	4	μs

Static Characteristics

Symbol	Test Conditions		Value	Unit		
V_{FM}	15A Device $I_T = 30\text{A}$; $t_p = 380\mu\text{s}$		MAX.	1.6	V	
	20A Device $I_T = 40\text{A}$; $t_p = 380\mu\text{s}$					
	25A Device $I_T = 50\text{A}$; $t_p = 380\mu\text{s}$					
I_{RM}	V_{RRM}	$T_J = 25^\circ\text{C}$	MAX.	400-600V	10	μA
				800-1000V	20	
		$T_J = 100^\circ\text{C}$		400-800V	500	
				1000V	3000	
		$T_J = 125^\circ\text{C}$		400-800V	1000	

Thermal Resistances

Symbol	Parameter	Value	Unit
$R_{\theta(J-C)}$	Junction to case (AC)	Dxx15L	2.60
		Dxx20L	2.55
		Dxx25L	2.50

Note: xx = voltage

Figure 1: On-State Current vs. On-State Voltage (Typical)

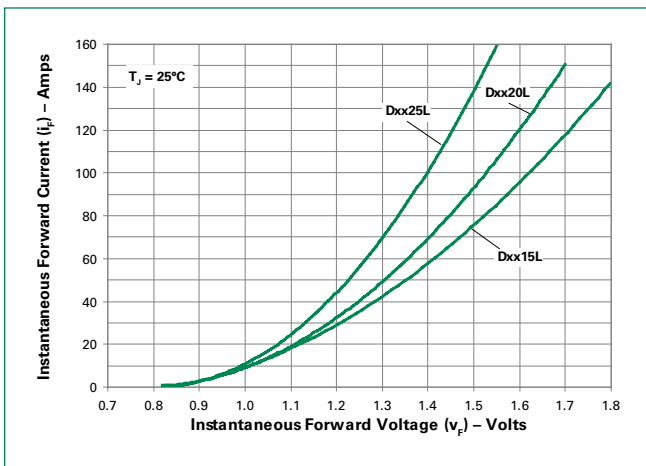


Figure 2: Power Dissipation vs. Average Forward On-State Current (Typical)



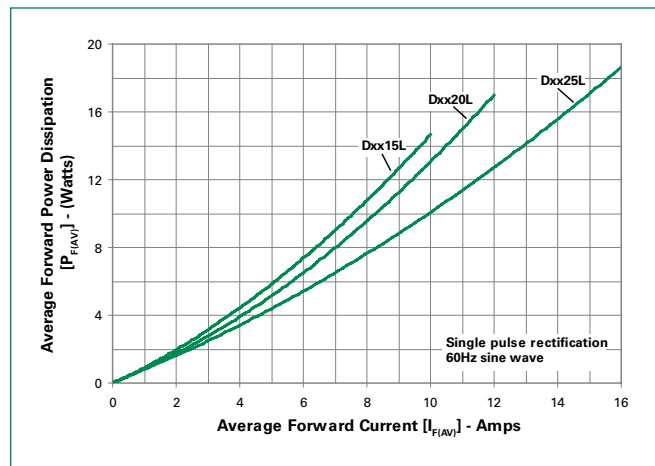


Figure 3: Maximum Allowable Case Temperature vs. Average On-State Current

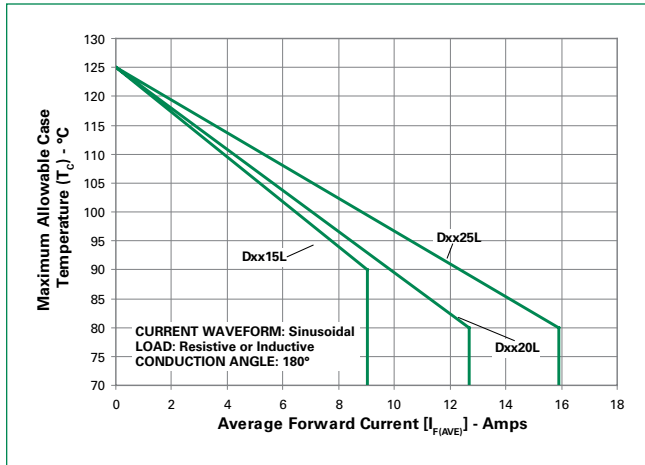


Note: xx = voltage

Figure 4: Surge Peak On-State Current vs. Number of Cycles

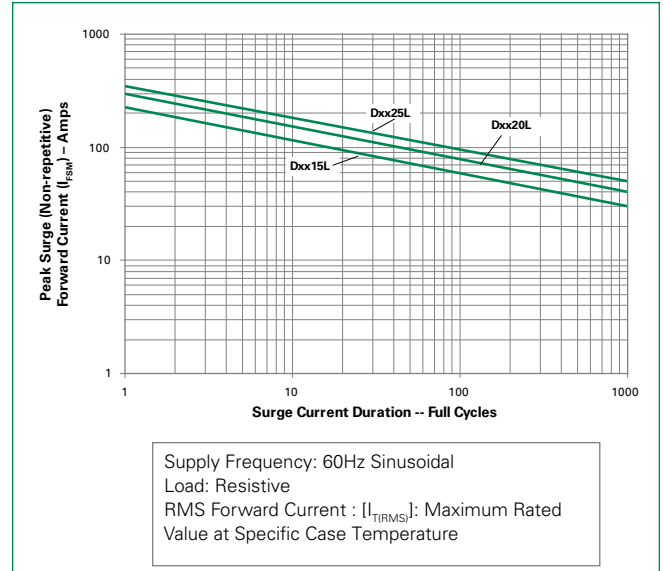

Soldering Parameters

Reflow Condition		Pb – Free assembly
Pre Heat	- Temperature Min ($T_{s(min)}$)	150°C
	- Temperature Max ($T_{s(max)}$)	200°C
	- Time (min to max) (t_s)	60 – 180 secs
Average ramp up rate (Liquidus Temp) (T_L) to peak		5°C/second max
$T_{s(max)}$ to T_L - Ramp-up Rate		5°C/second max
Reflow	- Temperature (T_L) (Liquidus)	217°C
	- Temperature (t_L)	60 – 150 seconds
Peak Temperature (T_p)		260 ^{+0/-5} °C
Time within 5°C of actual peak Temperature (t_p)		20 – 40 seconds
Ramp-down Rate		5°C/second max
Time 25°C to peak Temperature (T_p)		8 minutes Max.
Do not exceed		280°C

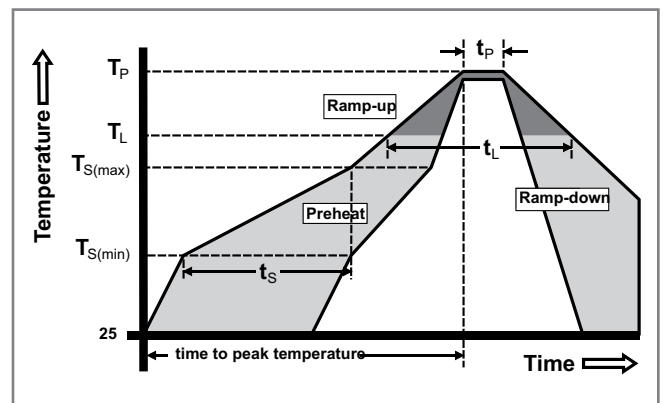

Physical Specifications

Terminal Finish	100% Matte Tin Plated
Body Material	UL recognized epoxy meeting flammability classification 94V-0
Lead Material	Copper Alloy


Design Considerations

Careful selection of the correct device for the application's operating parameters and environment will go a long way toward extending the operating life of the rectifier. Good design practice should limit the maximum continuous current through the main terminals to 75% of the device rating. Other ways to ensure long life for a power discrete semiconductor are proper heat sinking and selection of voltage ratings for worst case conditions. Overheating, overvoltage (including dv/dt), and surge currents are the main killers of semiconductors. Correct mounting, soldering, and forming of the leads also help protect against component damage.

Environmental Specifications

Test	Specifications and Conditions
High Temperature Voltage Blocking	MIL-STD-750: Method 1040, Condition A Rated V_{RRM} , 125°C, 1008 hours
Temperature Cycling	MIL-STD-750: Method 1051 -40°C to 150°C, 15-minute dwell, 100 cycles
Biased Temperature & Humidity	EIA/JEDEC: JESD22-A101 320VDC, 85°C, 85%RH, 1008 hours
High Temp Storage	MIL-STD-750: Method 1031 150°C, 1008 hours
Low-Temp Storage	1008 hours; -40°C
Resistance to Solder Heat	MIL-STD-750: Method 2031 260°C, 10 seconds
Solderability	ANSI/J-STD-002, Category 3, Test A
Lead Bend	MIL-STD-750: Method 2036, Condition E

Dimensions — TO-220AB (L-Package) — Isolated Mounting Tab

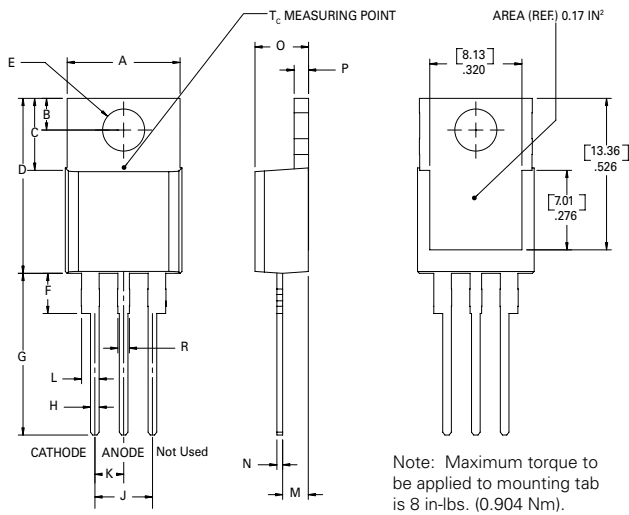

Dimension	Inches		Millimeters	
	Min	Max	Min	Max
A	0.380	0.420	9.65	10.67
B	0.105	0.115	2.67	2.92
C	0.230	0.250	5.84	6.35
D	0.590	0.620	14.99	15.75
E	0.142	0.147	3.61	3.73
F	0.110	0.130	2.79	3.30
G	0.540	0.575	13.72	14.61
H	0.025	0.035	0.64	0.89
J	0.195	0.205	4.95	5.21
K	0.095	0.105	2.41	2.67
L	0.060	0.075	1.52	1.91
M	0.085	0.095	2.16	2.41
N	0.018	0.024	0.46	0.61
O	0.178	0.188	4.52	4.78
P	0.045	0.060	1.14	1.52
R	0.038	0.048	0.97	1.22

Product Selector

Part Number	Voltage				Type	Package
	400V	600V	800V	1000V		
Dxx15L	X	X	X	X	Rectifier	TO-220L
Dxx20L	X	X	X	X	Rectifier	TO-220L
Dxx25L	X	X	X	X	Rectifier	TO-220L


Note: xx = Voltage

Packing Options

Part Number	Marking	Weight	Packing Mode	Base Quantity
Dxx15LTP	Dxx15L	2.2 g	Tube	500 (50 per tube)
Dxx20LTP	Dxx20L	2.2 g	Tube	500 (50 per tube)
Dxx25LTP	Dxx25L	2.2 g	Tube	500 (50 per tube)


Note: xx = Voltage

Part Numbering System

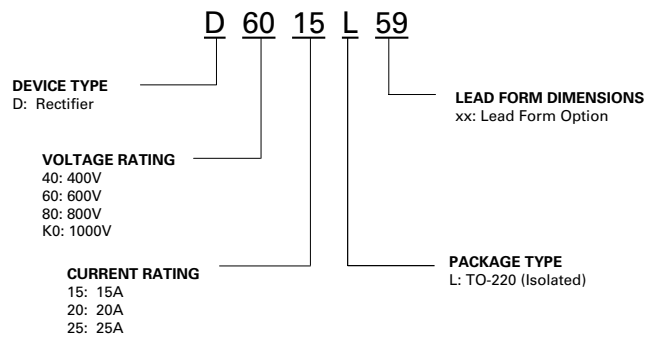

Part Marking System

TO-220AB - (L Package)

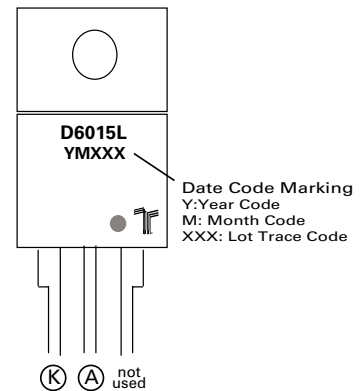

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Littelfuse:

[D8015L56](#) [D8025L](#) [DK020L](#) [D4015L](#) [D6015L53](#) [D6025L](#) [D4015L52](#) [D2015L52](#) [D2020L](#) [D6020L](#) [D2015L](#)
[D2020L55](#) [D2025L](#) [D6020L55](#) [D4020L52](#) [D2015L53](#) [D4015L53](#) [D4020L](#) [D6015L58](#) [D6015LTP](#) [D8015L](#)
[D4020L53](#) [D6015L](#) [D8020L](#) [DK015L](#) [D4025L](#) [D4015LTP](#) [D6015L52](#) [DK025L](#) [D4015L56](#) [D6020L53](#) [D8010L](#)
[DK020LTP](#) [D4025LTP](#) [DK025LTP](#) [D6025LTP](#) [D8010LTP](#) [D8015LTP](#) [D8020LTP](#) [DK015LTP](#) [D4020LTP](#)
[D6020LTP](#) [D8025LTP](#) [D8015L56TP](#)