

## ◆ Reliability specification

Test Items	Condition (test methods)	Low		Regular		High		Typical
		≤47Ω	≥47Ω	≤47Ω	≥47Ω	≤47Ω	≥47Ω	Low
Short time overload	2.5 x rated voltage, <sup>*1</sup> 5 seconds	±0.10%	±0.05%	±0.10%	±0.05%	—	±0.10%	±(0.01%)
Life (biased)	70°C, rated voltage, <sup>*1</sup> 90min on 30min off, 1000hours	±0.25%	±0.10%	±0.50%	±0.25%	—	±0.50%	±(0.01%)
High temperature high humidity	85°C, 85%RH, 1/10 of rated power, 90min on 30min off, 1000hours	±0.25%	±0.10%	±0.50%	±0.25%	—	±0.50%	±(0.05%)
Temperature shock	-55°C (30min) ~ 125°C (30min) 1000cycles	±0.25%	±0.10%	±0.25%	±0.10%	—	±0.10%	±(0.01%)
High temperature exposure	155°C, no bias, 1000hours	±0.25%	±0.10%	±0.25%	±0.10%	—	±0.10%	±(0.01%)
Resistance to soldering heat	260±5°C, 10 seconds (reflow)	±0.1%	±0.1%	±0.1%	±0.1%	—	±0.1%	±(0.01%)


\*1 Rated voltage is given by  $E = \sqrt{R \times P}$  E= rated voltage (V), R=nominal resistance value(Ω), P=rated power(W)  
If rated voltage exceeds maximum voltage /element, maximum voltage/element is the rated voltage.

Thin film surface mount resistors


RG series

## ◆ 10000 hour reliability test data


### ○ Biased life test

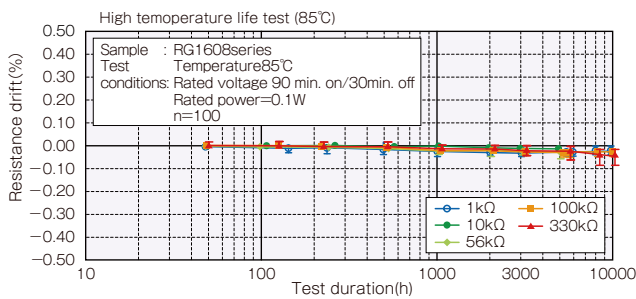


### ○ High temperature high humidity (biased)

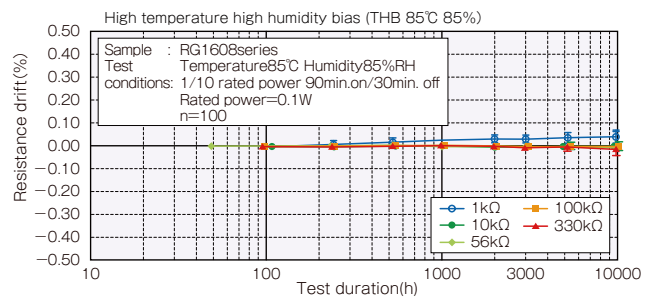


### ○ Temperature shock

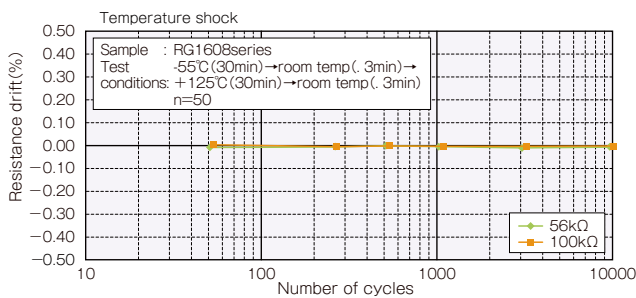


### ○ High temperature exposure

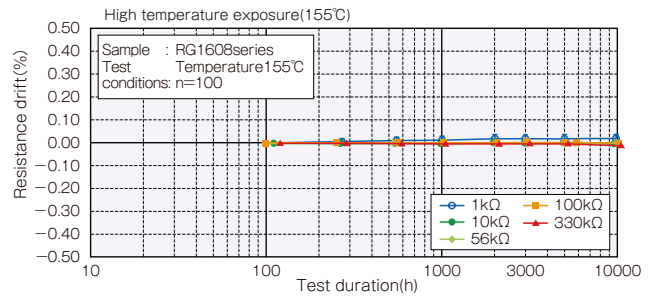

## ◆ Derating Curve

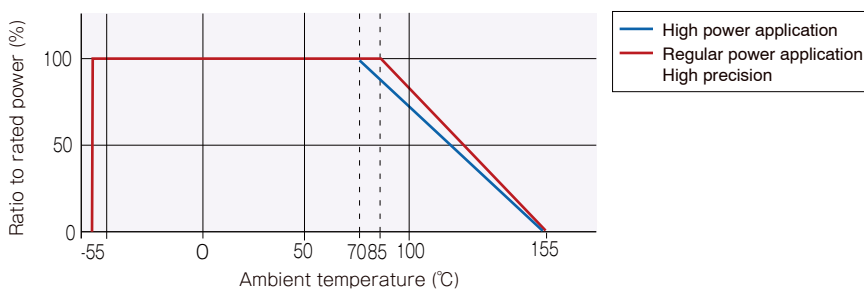

## ◆ Maximum pulse power limit

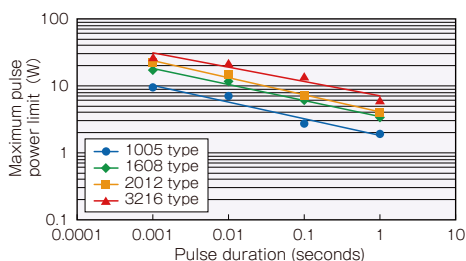

### Test procedure

Voltage pulse is applied to the test samples mounted on the test board.

After each pulse, resistance drift is measured. Pulse voltage is increased until the drift exceeds +/-0.5%.

The power at that voltage is defined as the maximum pulse power.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Susumu:

[RG3216V-1871-B-T1](#) [RG3216V-1871-B-T5](#) [RG3216V-1871-C-T5](#) [RG3216V-1871-D-T5](#) [RG3216V-1871-P-T1](#)  
[RG3216V-1871-W-T1](#) [RG3216V-1872-B-T1](#) [RG3216V-1872-B-T5](#) [RG3216V-1872-C-T5](#) [RG3216V-1872-D-T5](#)  
[RG3216V-1872-P-T1](#) [RG3216V-1872-W-T1](#) [RG3216V-1910-B-T1](#) [RG3216V-1910-B-T5](#) [RG3216V-1910-C-T5](#)  
[RG3216V-1910-D-T5](#) [RG3216V-1910-P-T1](#) [RG3216V-1910-W-T1](#) [RG3216V-1911-B-T1](#) [RG3216V-1911-B-T5](#)  
[RG3216V-1911-C-T5](#) [RG3216V-1911-D-T5](#) [RG3216V-1911-P-T1](#) [RG3216V-1911-W-T1](#) [RG3216V-1912-B-T1](#)  
[RG3216V-1912-B-T5](#) [RG3216V-1912-C-T5](#) [RG3216V-1912-D-T5](#) [RG3216V-1912-P-T1](#) [RG3216V-1912-W-T1](#)  
[RG3216V-1960-B-T1](#) [RG3216V-1960-B-T5](#) [RG3216V-1960-C-T5](#) [RG3216V-1960-D-T5](#) [RG3216V-1960-P-T1](#)  
[RG3216V-1960-W-T1](#) [RG3216V-1961-B-T1](#) [RG3216V-1961-B-T5](#) [RG3216V-1961-C-T5](#) [RG3216V-1961-D-T5](#)  
[RG3216V-1961-P-T1](#) [RG3216V-1961-W-T1](#) [RG3216V-1962-B-T1](#) [RG3216V-1962-B-T5](#) [RG3216V-1962-C-T5](#)  
[RG3216V-1962-D-T5](#) [RG3216V-1962-P-T1](#) [RG3216V-1962-W-T1](#) [RG3216V-2000-B-T1](#) [RG3216V-2000-B-T5](#)  
[RG3216V-2000-C-T5](#) [RG3216V-2000-D-T5](#) [RG3216V-2000-P-T1](#) [RG3216V-2000-W-T1](#) [RG3216V-2001-B-T1](#)  
[RG3216V-2001-B-T5](#) [RG3216V-2001-C-T5](#) [RG3216V-2001-D-T5](#) [RG3216V-2001-P-T1](#) [RG3216V-2001-W-T1](#)  
[RG3216V-2002-B-T1](#) [RG3216V-2002-B-T5](#) [RG3216V-2002-C-T5](#) [RG3216V-2002-D-T5](#) [RG3216V-2002-P-T1](#)  
[RG3216V-2002-W-T1](#) [RG3216V-2050-B-T1](#) [RG3216V-2050-B-T5](#) [RG3216V-2050-C-T5](#) [RG3216V-2050-D-T5](#)  
[RG3216V-2050-P-T1](#) [RG3216V-2050-W-T1](#) [RG3216V-2051-B-T1](#) [RG3216V-2051-B-T5](#) [RG3216V-2051-C-T5](#)  
[RG3216V-2051-D-T5](#) [RG3216V-2051-P-T1](#) [RG3216V-2051-W-T1](#) [RG3216V-2052-B-T1](#) [RG3216V-2052-B-T5](#)  
[RG3216V-2052-C-T5](#) [RG3216V-2052-D-T5](#) [RG3216V-2052-P-T1](#) [RG3216V-2052-W-T1](#) [RG3216V-2100-B-T1](#)  
[RG3216V-2100-B-T5](#) [RG3216V-2100-C-T5](#) [RG3216V-2100-D-T5](#) [RG3216V-2100-P-T1](#) [RG3216V-2100-W-T1](#)  
[RG3216V-2101-B-T1](#) [RG3216V-2101-B-T5](#) [RG3216V-2101-C-T5](#) [RG3216V-2101-D-T5](#) [RG3216V-2101-P-T1](#)  
[RG3216V-2101-W-T1](#) [RG3216V-2102-B-T1](#) [RG3216V-2102-B-T5](#) [RG3216V-2102-C-T5](#) [RG3216V-2102-D-T5](#)