

Foam Wire Pulling Lubricant

FOAM WIRE PULLING LUBRICANT


eliminates the mess and hassle of applying traditional gels or wax!



NO DRIPS! NO STAINS! NO MESS!

- Foam lubricant is applied directly into the conduit. No need to pre-coat wires.
- No mess formula stays where it is applied, even in vertical conduit!
- Dissolves clean from hands and clothing.

4x GREATER YIELD* THAN GELS OR WAXES!

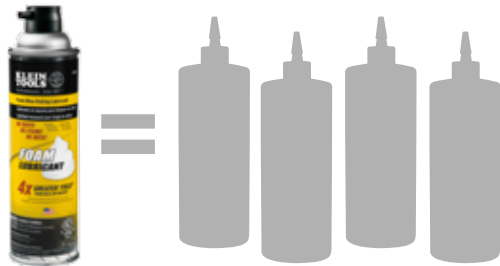

- 19 oz. can easier to carry on a jobsite than four quart bottles.
- Easier to divide among multiple electricians than a large 5 gallon bucket.

Cat. No.	UPC# 0-92644+	Net Weight
51100	51100-4	19 oz.

*One can equals one gallon or 4 quarts of wax/gel lubricants. Based on job site pulls with foam in 3/4" conduit when used as directed.
 **When compared to published list price of 4 quart size bottles of Klein Tools gel or wax lubricant.

Danger:

- Extremely flammable propellant
- Keep out of reach of children

1	HEALTH
2	FLAMMABILITY
0	REACTIVITY
A	PERSONAL PROTECTION



See our complete line of Wire Pulling products
www.kleintools.com



51100

MADE IN USA



© 2017 Klein Tools, Inc.
 Lincolnshire, IL 60069-1418
 Rev. 04/17 C 96245

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Klein Tools:](#)

[51100](#)