

THERMAL PERFORMANCE			
PARAMETER	SYMBOL	TYP	UNIT
Junction-to-lead thermal resistance	$R_{\theta JL}$	23	°C/W
Junction-to-ambient thermal resistance	$R_{\theta JA}$	63	°C/W

ELECTRICAL SPECIFICATIONS (TA = 25°C unless otherwise noted)						
PARAMETER		CONDITIONS	SYMBOL	TYP	MAX	UNIT
Forward voltage ⁽¹⁾	SK32B	$I_F = 3A, T_J = 25^\circ C$	V_F	-	0.50	V
	SK33B			-	0.75	V
	SK34B			-	0.85	V
	SK35B			-	0.95	V
	SK36B			-	-	-
	SK39B			-	-	-
	SK310B			-	-	-
	SK315B			-	-	-
Reverse current @ rated V_R ⁽²⁾	SK32B	$T_J = 25^\circ C$	I_R	-	500	μA
	SK33B			-	100	μA
	SK34B			-	-	-
	SK35B			-	-	-
	SK36B			-	-	-
	SK39B			-	-	-
	SK310B			-	-	-
	SK315B			-	-	-
Reverse current @ rated V_R ⁽²⁾	SK32B	$T_J = 100^\circ C$	I_R	-	10	mA
	SK33B			-	5	mA
	SK34B			-	-	-
	SK35B			-	-	-
	SK36B			-	-	-
	SK39B			-	-	-
	SK310B			-	-	-
	SK315B			-	-	-
Reverse current @ rated V_R ⁽²⁾	SK32B	$T_J = 125^\circ C$	I_R	-	-	mA
	SK33B			-	-	mA
	SK34B			-	-	-
	SK35B			-	-	-
	SK36B			-	-	-
	SK39B			-	-	-
	SK310B			-	2	mA
	SK315B			-	-	-
SK320B	-	-	-			

Notes:

1. Pulse test with PW = 0.3ms
2. Pulse test with PW = 30ms

ORDERING INFORMATION

ORDERING CODE⁽¹⁾	PACKAGE	PACKING
SK3xB	DO-214AA (SMB)	3,000 / Tape & Reel

Notes:

1. "x" defines voltage from 20V(SK32B) to 200V(SK320B)

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.1 Forward Current Derating Curve

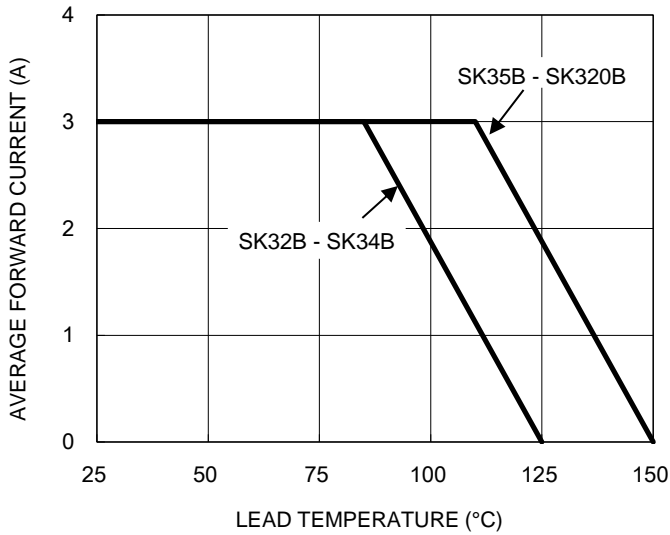


Fig.2 Typical Junction Capacitance

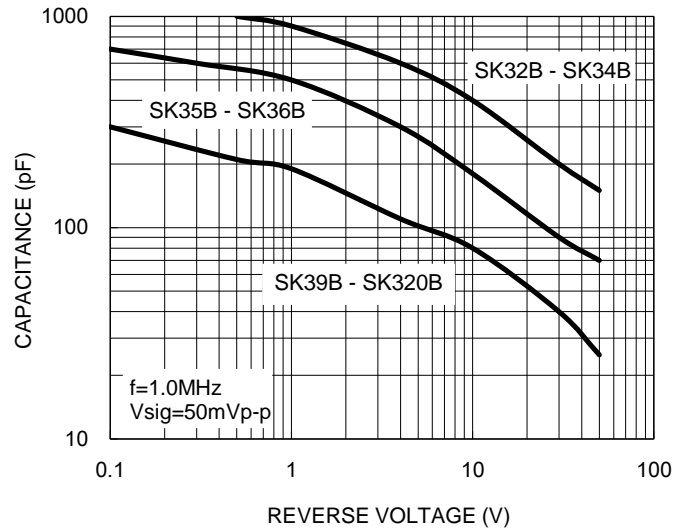


Fig.3 Typical Reverse Characteristics


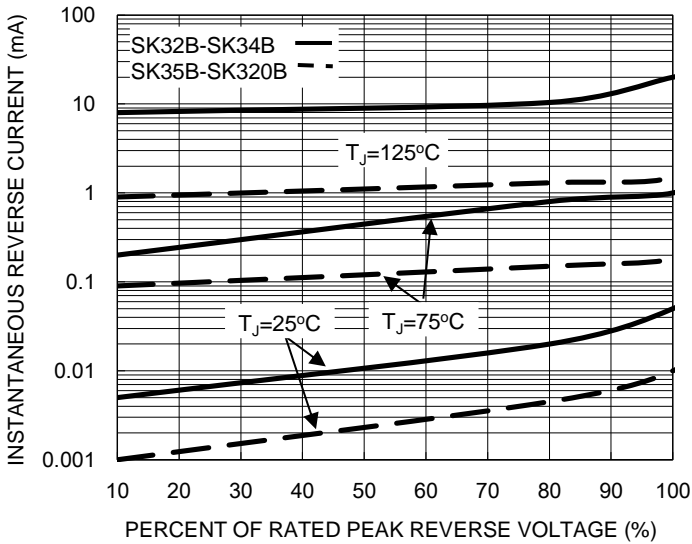


Fig.4 Typical Forward Characteristics

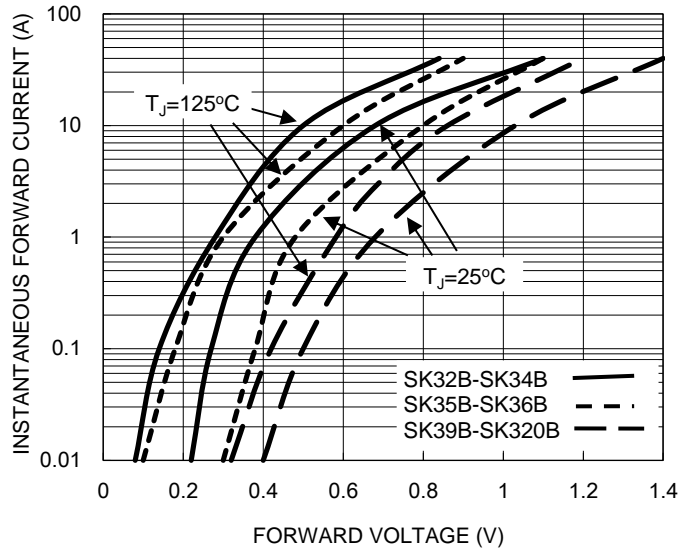

CHARACTERISTICS CURVES

($T_A = 25^\circ\text{C}$ unless otherwise noted)

Fig.5 Maximum Non-Repetitive Forward Surge Current



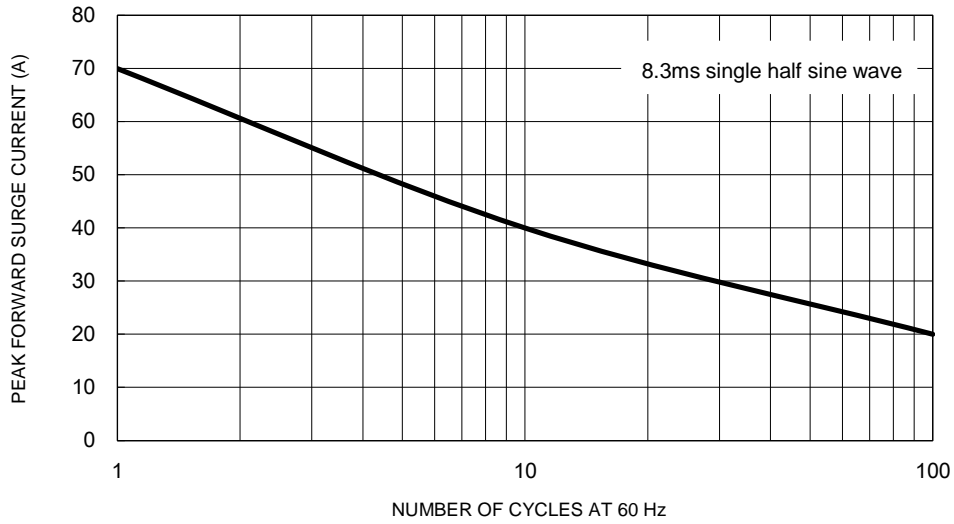


Fig.6 Typical Transient Thermal Characteristics

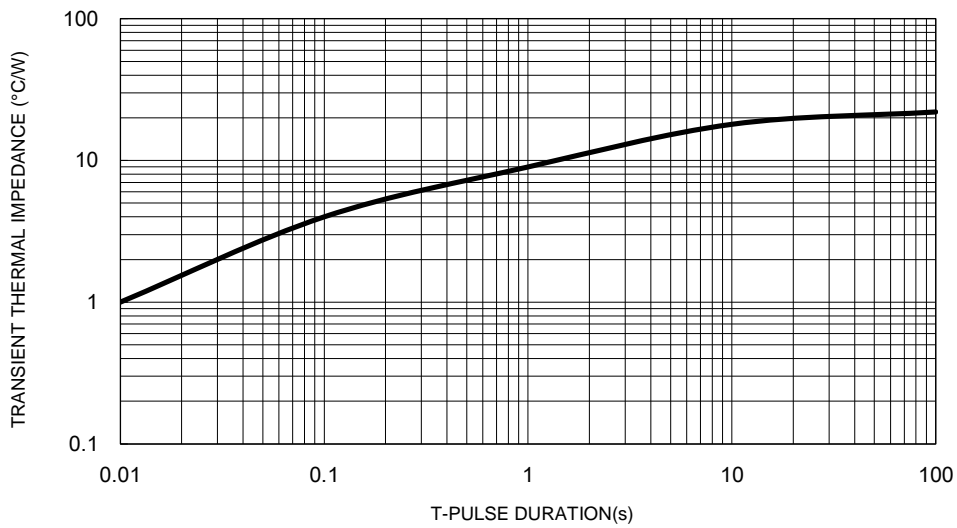


PACKAGE OUTLINE DIMENSIONS

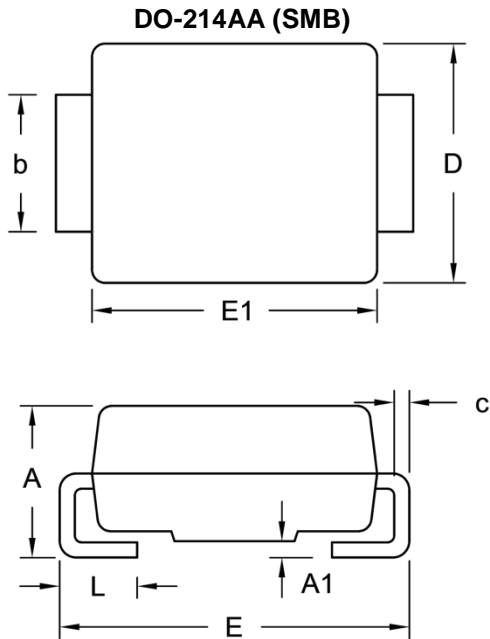

DIM.	Unit (mm)		Unit (inch)	
	Min.	Max.	Min.	Max.
A	1.95	2.65	0.077	0.104
A1	0.05	0.20	0.002	0.008
b	1.95	2.20	0.077	0.087
c	0.15	0.31	0.006	0.012
D	3.30	3.95	0.130	0.156
E	5.10	5.60	0.201	0.220
E1	4.05	4.60	0.159	0.181
L	0.75	1.60	0.030	0.063

SUGGESTED PAD LAYOUT

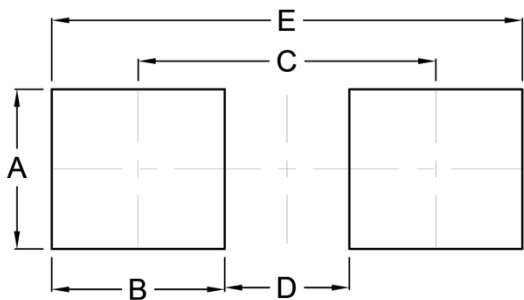

Symbol	Unit (mm)	Unit (inch)
A	2.30	0.091
B	2.50	0.098
C	4.30	0.169
D	1.80	0.071
E	6.80	0.268

MARKING DIAGRAM



- P/N = Marking Code
- G = Green Compound
- YW = Date Code
- F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Purchasers are solely responsible for the choice, selection, and use of TSC products and TSC assumes no liability for application assistance or the design of Purchasers' products.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Taiwan Semiconductor:](#)

[SK315B](#) [SK310B](#) [SK33B](#) [SK34B](#) [SK36B](#) [SK320B](#)