

# **TCM8-1+**

### **Outline Drawing**

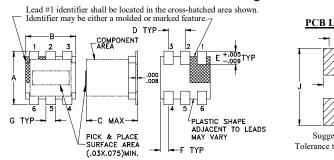




### Outline Dimensions (inch )

А	В	С	D	E	F
.160	.150	.160	.050	.040	.025
4.06	3.81	4.06	1.27	1.02	0.64
G	н	J	к		wt
G .028	H .065	J .190	K .030		wt grams

### **Typical Performance Data**

FREQUENCY (MHz)	INSERTION LOSS (dB)	INPUT R. LOSS (dB)
2.00	1.36	20.96
5.00	1.11	27.44
10.00	1.07	32.00
30.00	1.13	31.42
50.00	1.17	28.33
100.00	1.24	22.86
200.00	1.35	16.51
300.00	1.67	12.66
400.00	2.27	9.85
500.00	2.72	7.79

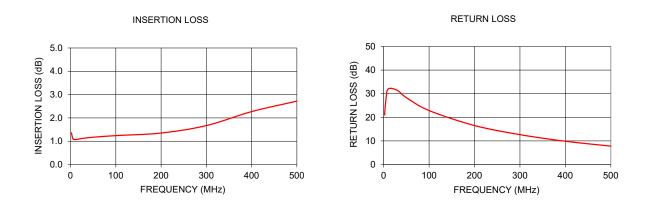

#### **Additional Notes**

- A. Performance and quality attributes and conditions not expressly stated in this specification document are intended to be excluded and do not form a part of this specification document.
- A. Pertomatice and quary attributes and continues and continues and continues and other part of this specification occurrent are interfaced to be excluded and this specification docurrent are based on Mini-Circuit's applicable established test performance criteria and measurement instructions.
  C. The parts covered by this specification document are subject to Mini-Circuits standard limited warranty and terms and conditions (collectively, "Standard Terms"); Purchasers of this part are entitled to the rights and benefits contained threin. For a full statement of the Standard Terms and the exclusive rights and remedies thereunder, please visit Mini-Circuits' website at www.minicircuits.com/MCLStore/terms.jsp



## **Mouser Electronics**

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Mini-Circuits: TCM8-1+