

**ABSOLUTE MAXIMUM RATINGS**

Voltage Range on Any Pin Relative to Ground  
 Operating Temperature Range  
 Storage Temperature Range

See DS1921G Datasheet  
 -4°F to 149°F (-20°C to +65°C)  
 See DS1921G Datasheet

*Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to the absolute maximum rating conditions for extended periods may affect device.*

**SPECIFICATIONS**

(See DS1921G datasheet,  $T_A = -4^\circ\text{F}$  to  $149^\circ\text{F}$  ( $-20^\circ\text{C}$  to  $+65^\circ\text{C}$ ) (Note 1))

PARAMETER	CONDITIONS	MIN	TYP	MAX	UNITS
Weight		2.5			ounces
		72			grams
Physical Dimensions		See technical drawing			
Wire Length		12.9		13.1	inches
		32.8		33.3	cm
Tensile Strength of Wires		10			lbf
		44.5			Newton
Thermal Response Time	(Note 2)	500			s

**Note 1:** Assembled module production tested at 77°F (25°C).

**Note 2:** Response time in water is the time required for the recorded value to read 63% of the temperature's real variation.

Material: PVC with PVC cement and E-60NC black Hysol epoxy for wire sealant

**PIN DESCRIPTION**

PIN	NAME	FUNCTION
Red Wire	IO	1-Wire bus interface. Open drain, requires external pull-up resistor.
Black Wire	GND	Ground Reference

**iButton LOCATION WITHIN MODULE**


Each DS1921G in the DS9108 module contains a memory tag marker to indicate its position in the assembly. The position mark is a CRC16 validated packet starting on page 15 in the user memory. The memory image for 'TOP', 'MIDDLE', and 'BOTTOM':

**Table 1. Memory Tag Description**


TAG TYPE	ADDRESS	CONTENTS (HEX)	DESCRIPTION
TOP	1E0h–1E3h	01 54 FA 60	'T' in a CRC validated packet
MIDDLE		01 4D 3B AA	'M' in a CRC validated packet
BOTTOM		01 42 7B AE	'B' in a CRC validated packet

### TYPICAL OPERATING CHARACTERISTICS

The module is inserted into wet concrete with the top approximately 0.25 inches (0.6cm) below the surface. The wires are draped on the surface for later data retrieval.

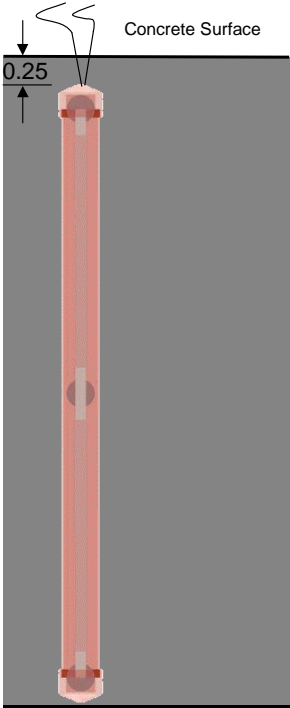

### PACKAGE INFORMATION

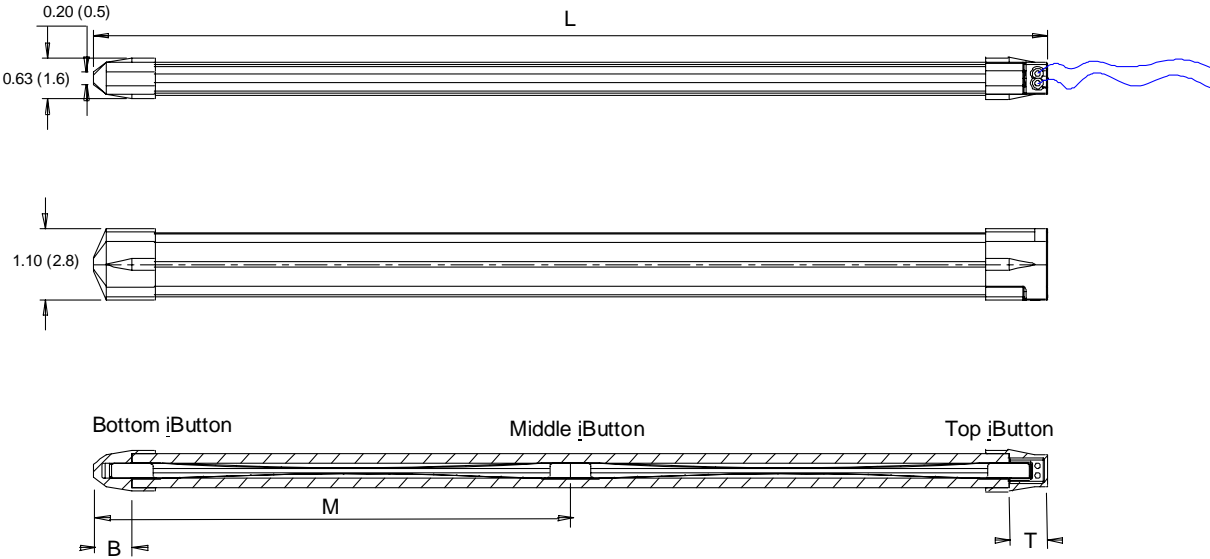

Concrete Depth	L	B	M	T
8 (20.3)	7.75 (19.7)	.60 (1.5)	3.88 (9.9)	.60 (1.5)
10 (25.4)	9.75 (24.8)	.60 (1.5)	4.88 (12.4)	.60 (1.5)
12 (30.5)	11.75 (29.8)	.60 (1.5)	5.88 (14.9)	.60 (1.5)
15 (38.1)	14.75 (37.5)	.60 (1.5)	7.38 (18.7)	.60 (1.5)

Inches (centimeters)