

# Low-Cost, Low-Power, Low-Dropout, SOT23-3 Voltage References

## ABSOLUTE MAXIMUM RATINGS

Voltages Referenced to GND

|  |                              |
|--|------------------------------|
| IN   | -0.3V to +13.5V              |
| OUT  | -0.3V to ( $V_{IN} + 0.3V$ ) |
| Output Short Circuit to GND or IN ( $V_{IN} < 6V$ )    | Continuous                   |
| Output Short Circuit to GND or IN ( $V_{IN} \geq 6V$ ) | 60sec                        |

Continuous Power Dissipation ( $T_A = +70^\circ\text{C}$ )

|   |   |
|---|---|
| SOT23-3 (derate 4.0mW/ $^\circ\text{C}$ above $+70^\circ\text{C}$ ) | 320mW                                       |
| Operating Temperature Range   | $-40^\circ\text{C}$ to $+85^\circ\text{C}$  |
| Storage Temperature Range   | $-65^\circ\text{C}$ to $+150^\circ\text{C}$ |
| Lead Temperature (soldering, 10sec)                                 | $+300^\circ\text{C}$                        |

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. These are stress ratings only, and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of the specifications is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

## ELECTRICAL CHARACTERISTICS—MAX6001

( $V_{IN} = +5V$ ,  $I_{OUT} = 0$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ\text{C}$ .) (Note 1)

| PARAMETER                                       | SYMBOL                                  | CONDITIONS   | MIN   | TYP   | MAX   | UNITS                     |
|---|---|--|-------|-------|-------|---------------------------|
| <b>OUTPUT</b>                                   |   |  |       |       |       |                           |
| Output Voltage                                  | $V_{OUT}$                               | $T_A = +25^\circ\text{C}$                                    | 1.237 | 1.250 | 1.263 | V                         |
| Output Voltage Temperature Coefficient (Note 2) | $TCV_{OUT}$                             |  |       | 20    | 100   | ppm/ $^\circ\text{C}$     |
| Line Regulation                                 | $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | $2.5V \leq V_{IN} \leq 12.6V$                                |       | 8     | 120   | $\mu\text{V/V}$           |
| Load Regulation                                 | $\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$ | Sourcing: $0 \leq I_{OUT} \leq 400\mu\text{A}$               |       | 0.12  | 0.8   | $\mu\text{V}/\mu\text{A}$ |
|   |   | Sinking: $-400\mu\text{A} \leq I_{OUT} \leq 0$               |       | 0.15  | 1.0   |                           |
| OUT Short-Circuit Current                       | $I_{SC}$                                | Short to GND   |       | 4     |       | mA                        |
|   |   | Short to IN  |       | 4     |       |                           |
| Temperature Hysteresis (Note 3)                 |   |  |       | 130   |       | ppm                       |
| Long-Term Stability                             | $\frac{\Delta V_{OUT}}{\text{time}}$    | 1,000 hours at $T_A = +25^\circ\text{C}$                     |       | 50    |       | ppm/<br>1,000hrs          |
| <b>DYNAMIC</b>                                  |   |  |       |       |       |                           |
| Noise Voltage                                   | $e_{OUT}$                               | $f = 0.1\text{Hz}$ to $10\text{Hz}$                          |       | 25    |       | $\mu\text{Vp-p}$          |
|   |   | $f = 10\text{Hz}$ to $10\text{kHz}$                          |       | 65    |       | $\mu\text{V}_{RMS}$       |
| Ripple Rejection                                | $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | $V_{IN} = 5V \pm 100\text{mV}$ , $f = 120\text{Hz}$          |       | 86    |       | dB                        |
| Turn-On Settling Time                           | $t_R$                                   | To $V_{OUT} = 0.1\%$ of final value, $C_{OUT} = 50\text{pF}$ |       | 30    |       | $\mu\text{s}$             |
| Capacitive-Load Stability Range                 | $C_{OUT}$                               | (Note 4)   | 0     |       | 2.2   | nF                        |
| <b>INPUT</b>                                    |   |  |       |       |       |                           |
| Supply Voltage Range                            | $V_{IN}$                                | Guaranteed by line-regulation test                           | 2.5   |       | 12.6  | V                         |
| Quiescent Supply Current                        | $I_{IN}$                                |  |       | 27    | 45    | $\mu\text{A}$             |
| Change in Supply Current                        | $I_{IN}/V_{IN}$                         | $2.5V \leq V_{IN} \leq 12.6V$                                |       | 0.8   | 2.6   | $\mu\text{A/V}$           |

# Low-Cost, Low-Power, Low-Dropout, SOT23-3 Voltage References

MAX6001-MAX6005

## ELECTRICAL CHARACTERISTICS—MAX6002

( $V_{IN} = +5V$ ,  $I_{OUT} = 0$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .) (Note 1)

| PARAMETER                                       | SYMBOL                                  | CONDITIONS   | MIN             | TYP   | MAX   | UNITS            |
|---|---|--|-----------------|-------|-------|------------------|
| <b>OUTPUT</b>                                   |   |  |                 |       |       |                  |
| Output Voltage                                  | $V_{OUT}$                               | $T_A = +25^\circ C$  | 2.475           | 2.500 | 2.525 | V                |
| Output Voltage Temperature Coefficient (Note 2) | $TCV_{OUT}$                             |  |                 | 20    | 100   | ppm/ $^\circ C$  |
| Line Regulation                                 | $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | $(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$                    |                 | 15    | 200   | $\mu V/V$        |
| Load Regulation                                 | $\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$ | Sourcing: $0 \leq I_{OUT} \leq 400\mu A$                     |                 | 0.14  | 0.90  | $\mu V/\mu A$    |
|   |   | Sinking: $-400\mu A \leq I_{OUT} \leq 0$                     |                 | 0.18  | 1.10  |                  |
| Dropout Voltage (Note 5)                        | $V_{IN} - V_{OUT}$                      | $I_{OUT} = 400\mu A$   |                 | 100   | 200   | mV               |
| OUT Short-Circuit Current                       | $I_{SC}$                                | Short to GND   |                 | 4     |       | mA               |
|   |   | Short to IN  |                 | 4     |       |                  |
| Temperature Hysteresis (Note 3)                 | $\frac{\Delta V_{OUT}}{\text{time}}$    |  |                 | 130   |       | ppm              |
| Long-Term Stability                             | $\frac{\Delta V_{OUT}}{\text{time}}$    | 1,000 hours at $T_A = +25^\circ C$                           |                 | 50    |       | ppm/<br>1,000hrs |
| <b>DYNAMIC</b>                                  |   |  |                 |       |       |                  |
| Noise Voltage                                   | $e_{OUT}$                               | $f = 0.1\text{Hz to }10\text{Hz}$                            |                 | 60    |       | $\mu V_{p-p}$    |
|   |   | $f = 10\text{Hz to }10\text{kHz}$                            |                 | 125   |       | $\mu V_{RMS}$    |
| Ripple Rejection                                | $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | $V_{IN} = 5V \pm 100\text{mV}$ , $f = 120\text{Hz}$          |                 | 82    |       | dB               |
| Turn-On Settling Time                           | $t_R$                                   | To $V_{OUT} = 0.1\%$ of final value, $C_{OUT} = 50\text{pF}$ |                 | 85    |       | $\mu s$          |
| Capacitive-Load Stability Range                 | $C_{OUT}$                               | (Note 4)   | 0               |       | 2.2   | nF               |
| <b>INPUT</b>                                    |   |  |                 |       |       |                  |
| Supply Voltage Range                            | $V_{IN}$                                | Guaranteed by line-regulation test                           | $V_{OUT} + 0.2$ |       | 12.6  | V                |
| Quiescent Supply Current                        | $I_{IN}$                                |  |                 | 27    | 45    | $\mu A$          |
| Change in Supply Current                        | $I_{IN}/V_{IN}$                         | $(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$                    |                 | 0.8   | 2.6   | $\mu A/V$        |

# Low-Cost, Low-Power, Low-Dropout, SOT23-3 Voltage References

MAX6001-MAX6005

## ELECTRICAL CHARACTERISTICS—MAX6003

( $V_{IN} = +5V$ ,  $I_{OUT} = 0$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .) (Note 1)

| PARAMETER                                       | SYMBOL                                  | CONDITIONS   | MIN             | TYP  | MAX  | UNITS            |
|---|---|--|-----------------|------|------|------------------|
| <b>OUTPUT</b>                                   |   |  |                 |      |      |                  |
| Output Voltage                                  | $V_{OUT}$                               | $T_A = +25^\circ C$  | 2.97            | 3.00 | 3.03 | V                |
| Output Voltage Temperature Coefficient (Note 2) | $TCV_{OUT}$                             |  |                 | 20   | 100  | ppm/ $^\circ C$  |
| Line Regulation                                 | $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | $(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$                    |                 | 20   | 220  | $\mu V/V$        |
| Load Regulation                                 | $\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$ | Sourcing: $0 \leq I_{OUT} \leq 400\mu A$                     |                 | 0.14 | 0.90 | $\mu V/\mu A$    |
|   |   | Sinking: $-400\mu A \leq I_{OUT} \leq 0$                     |                 | 0.18 | 1.10 |                  |
| Dropout Voltage (Note 5)                        | $V_{IN} - V_{OUT}$                      | $I_{OUT} = 400\mu A$   |                 | 100  | 200  | mV               |
| OUT Short-Circuit Current                       | $I_{SC}$                                | Short to GND   |                 | 4    |      | mA               |
|   |   | Short to IN  |                 | 4    |      |                  |
| Temperature Hysteresis (Note 3)                 | $\frac{\Delta V_{OUT}}{\text{time}}$    |  |                 | 130  |      | ppm              |
| Long-Term Stability                             | $\frac{\Delta V_{OUT}}{\text{time}}$    | 1,000 hours at $T_A = +25^\circ C$                           |                 | 50   |      | ppm/<br>1,000hrs |
| <b>DYNAMIC</b>                                  |   |  |                 |      |      |                  |
| Noise Voltage                                   | $e_{OUT}$                               | $f = 0.1\text{Hz to }10\text{Hz}$                            |                 | 75   |      | $\mu V_{p-p}$    |
|   |   | $f = 10\text{Hz to }10\text{kHz}$                            |                 | 150  |      | $\mu V_{RMS}$    |
| Ripple Rejection                                | $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | $V_{IN} = 5V \pm 100\text{mV}$ , $f = 120\text{Hz}$          |                 | 80   |      | dB               |
| Turn-On Settling Time                           | $t_R$                                   | To $V_{OUT} = 0.1\%$ of final value, $C_{OUT} = 50\text{pF}$ |                 | 100  |      | $\mu s$          |
| Capacitive-Load Stability Range                 | $C_{OUT}$                               | (Note 4)   | 0               |      | 2.2  | nF               |
| <b>INPUT</b>                                    |   |  |                 |      |      |                  |
| Supply Voltage Range                            | $V_{IN}$                                | Guaranteed by line-regulation test                           | $V_{OUT} + 0.2$ |      | 12.6 | V                |
| Quiescent Supply Current                        | $I_{IN}$                                |  |                 | 27   | 45   | $\mu A$          |
| Change in Supply Current                        | $I_{IN}/V_{IN}$                         | $(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$                    |                 | 0.8  | 2.6  | $\mu A/V$        |

# Low-Cost, Low-Power, Low-Dropout, SOT23-3 Voltage References

MAX6001-MAX6005

## ELECTRICAL CHARACTERISTICS—MAX6004

( $V_{IN} = +5V$ ,  $I_{OUT} = 0$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .) (Note 1)

| PARAMETER                                       | SYMBOL                                  | CONDITIONS  | MIN             | TYP   | MAX   | UNITS            |
|---|---|---|-----------------|-------|-------|------------------|
| <b>OUTPUT</b>                                   |   |   |                 |       |       |                  |
| Output Voltage                                  | $V_{OUT}$                               | $T_A = +25^\circ C$                                   | 4.055           | 4.096 | 4.137 | V                |
| Output Voltage Temperature Coefficient (Note 2) | $TCV_{OUT}$                             |   |                 | 20    | 100   | ppm/ $^\circ C$  |
| Line Regulation                                 | $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | $(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$             |                 | 25    | 240   | $\mu V/V$        |
| Load Regulation                                 | $\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$ | Sourcing: $0 \leq I_{OUT} \leq 400\mu A$              |                 | 0.15  | 1.00  | $\mu V/\mu A$    |
|   |   | Sinking: $-400\mu A \leq I_{OUT} \leq 0$              |                 | 0.20  | 1.20  |                  |
| Dropout Voltage (Note 5)                        | $V_{IN} - V_{OUT}$                      | $I_{OUT} = 400\mu A$                                  |                 | 100   | 200   | mV               |
| OUT Short-Circuit Current                       | $I_{SC}$                                | Short to GND  |                 | 4     |       | mA               |
|   |   | Short to IN   |                 | 4     |       |                  |
| Temperature Hysteresis (Note 3)                 | $\frac{\Delta V_{OUT}}{\text{time}}$    | 1,000 hours at $T_A = +25^\circ C$                    |                 | 130   |       | ppm              |
| Long-Term Stability                             | $\frac{\Delta V_{OUT}}{\text{time}}$    | 1,000 hours at $T_A = +25^\circ C$                    |                 | 50    |       | ppm/<br>1,000hrs |
| <b>DYNAMIC</b>                                  |   |   |                 |       |       |                  |
| Noise Voltage                                   | $e_{OUT}$                               | $f = 0.1Hz$ to $10Hz$                                 |                 | 100   |       | $\mu Vp-p$       |
|   |   | $f = 10Hz$ to $10kHz$                                 |                 | 200   |       | $\mu V_{RMS}$    |
| Ripple Rejection                                | $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | $V_{IN} = 5V \pm 100mV$ , $f = 120Hz$                 |                 | 77    |       | dB               |
| Turn-On Settling Time                           | $t_R$                                   | To $V_{OUT} = 0.1\%$ of final value, $C_{OUT} = 50pF$ |                 | 160   |       | $\mu s$          |
| Capacitive-Load Stability Range                 | $C_{OUT}$                               | (Note 4)  | 0               |       | 2.2   | nF               |
| <b>INPUT</b>                                    |   |   |                 |       |       |                  |
| Supply Voltage Range                            | $V_{IN}$                                | Guaranteed by line-regulation test                    | $V_{OUT} + 0.2$ |       | 12.6  | V                |
| Quiescent Supply Current                        | $I_{IN}$                                |   |                 | 27    | 45    | $\mu A$          |
| Change in Supply Current                        | $I_{IN}/V_{IN}$                         | $(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$             |                 | 0.8   | 2.6   | $\mu A/V$        |

# Low-Cost, Low-Power, Low-Dropout, SOT23-3 Voltage References

## ELECTRICAL CHARACTERISTICS—MAX6005

( $V_{IN} = +5.5V$ ,  $I_{OUT} = 0$ ,  $T_A = T_{MIN}$  to  $T_{MAX}$ , unless otherwise noted. Typical values are at  $T_A = +25^\circ C$ .) (Note 1)

| PARAMETER                                       | SYMBOL                                  | CONDITIONS   | MIN             | TYP   | MAX   | UNITS              |
|---|---|--|-----------------|-------|-------|--------------------|
| <b>OUTPUT</b>                                   |   |  |                 |       |       |                    |
| Output Voltage                                  | $V_{OUT}$                               | $T_A = +25^\circ C$  | 4.950           | 5.000 | 5.050 | V                  |
| Output Voltage Temperature Coefficient (Note 2) | $TCV_{OUT}$                             |  |                 | 20    | 100   | ppm/ $^\circ C$    |
| Line Regulation                                 | $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | $(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$                    |                 | 25    | 240   | $\mu V/V$          |
| Load Regulation                                 | $\frac{\Delta V_{OUT}}{\Delta I_{OUT}}$ | Sourcing: $0 \leq I_{OUT} \leq 400\mu A$                     |                 | 0.17  | 1.00  | $\mu V/\mu A$      |
|   |   | Sinking: $-400\mu A \leq I_{OUT} \leq 0$                     |                 | 0.24  | 1.20  |                    |
| Dropout Voltage (Note 5)                        | $V_{IN} - V_{OUT}$                      | $I_{OUT} = 400\mu A$   |                 | 100   | 200   | mV                 |
| OUT Short-Circuit Current                       | $I_{SC}$                                | Short to GND   |                 | 4     |       | mA                 |
|   |   | Short to IN  |                 | 4     |       |                    |
| Temperature Hysteresis (Note 3)                 |   |  |                 | 130   |       | ppm                |
| Long-Term Stability                             | $\frac{\Delta V_{OUT}}{\text{time}}$    | 1,000 hours at $T_A = +25^\circ C$                           |                 | 50    |       | ppm/<br>1,000hrs   |
| <b>DYNAMIC</b>                                  |   |  |                 |       |       |                    |
| Noise Voltage                                   | $e_{OUT}$                               | $f = 0.1\text{Hz to }10\text{Hz}$                            |                 | 120   |       | $\mu V\text{-p-p}$ |
|   |   | $f = 10\text{Hz to }10\text{kHz}$                            |                 | 240   |       | $\mu V_{RMS}$      |
| Ripple Rejection                                | $\frac{\Delta V_{OUT}}{\Delta V_{IN}}$  | $V_{IN} = 5V \pm 100\text{mV}$ , $f = 120\text{Hz}$          |                 | 72    |       | dB                 |
| Turn-On Settling Time                           | $t_R$                                   | To $V_{OUT} = 0.1\%$ of final value, $C_{OUT} = 50\text{pF}$ |                 | 220   |       | $\mu s$            |
| Capacitive-Load Stability Range                 | $C_{OUT}$                               | (Note 4)   | 0               |       | 2.2   | nF                 |
| <b>INPUT</b>                                    |   |  |                 |       |       |                    |
| Supply Voltage Range                            | $V_{IN}$                                | Guaranteed by line-regulation test                           | $V_{OUT} + 0.2$ |       | 12.6  | V                  |
| Quiescent Supply Current                        | $I_{IN}$                                |  |                 | 27    | 45    | $\mu A$            |
| Change in Supply Current                        | $I_{IN}/V_{IN}$                         | $(V_{OUT} + 0.2V) \leq V_{IN} \leq 12.6V$                    |                 | 0.8   | 2.6   | $\mu A/V$          |

**Note 1:** All devices are 100% production tested at  $T_A = +25^\circ C$  and are guaranteed by design for  $T_A = T_{MIN}$  to  $T_{MAX}$ , as specified.

**Note 2:** Temperature coefficient is measured by the "box" method; i.e., the maximum  $\Delta V_{OUT}$  is divided by the maximum  $\Delta t$ .

**Note 3:** Thermal hysteresis is defined as the change in  $+25^\circ C$  output voltage before and after cycling the device from  $T_{MIN}$  to  $T_{MAX}$ .

**Note 4:** Not production tested. Guaranteed by design.










**Note 5:** Dropout voltage is the minimum input voltage at which  $V_{OUT}$  changes  $\leq 0.2\%$  from  $V_{OUT}$  at  $V_{IN} = 5.0V$  ( $V_{IN} = 5.5V$  for MAX6005).

# Low-Cost, Low-Power, Low-Dropout, SOT23-3 Voltage References

## Typical Operating Characteristics

( $V_{IN} = +5V$  for MAX6001–MAX6004,  $V_{IN} = +5.5V$  for MAX6005;  $I_{OUT} = 0$ ;  $T_A = +25^\circ C$ ; unless otherwise noted.) (Note 6)










MAX6001–MAX6005

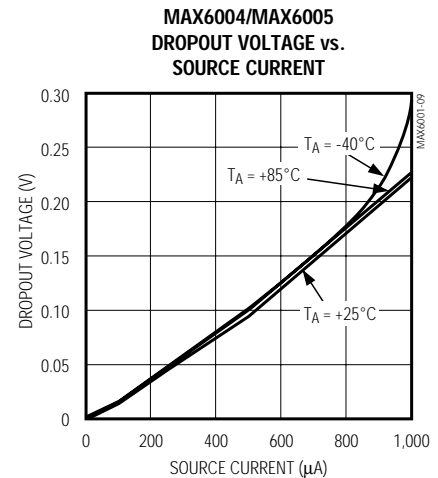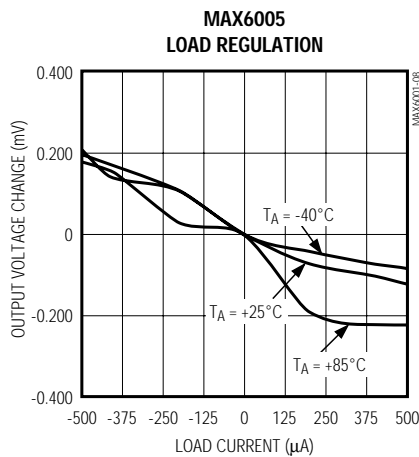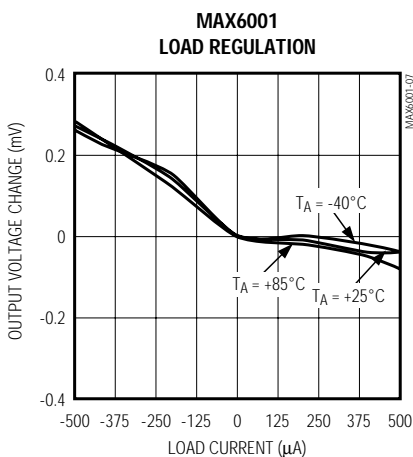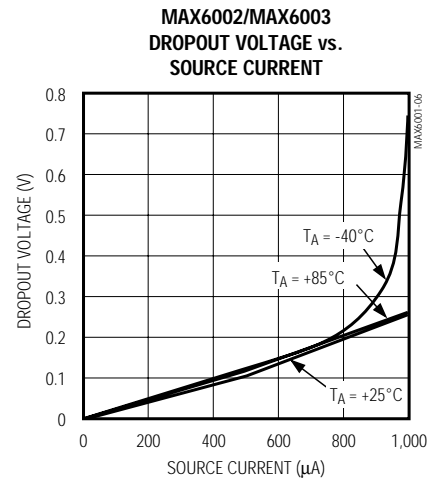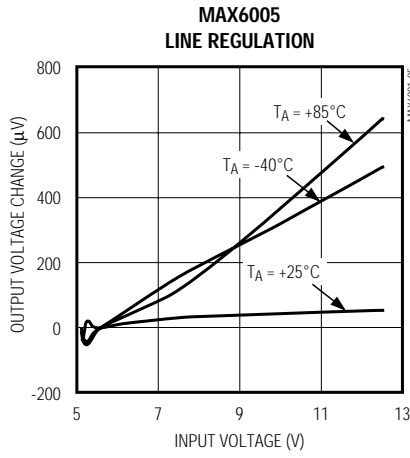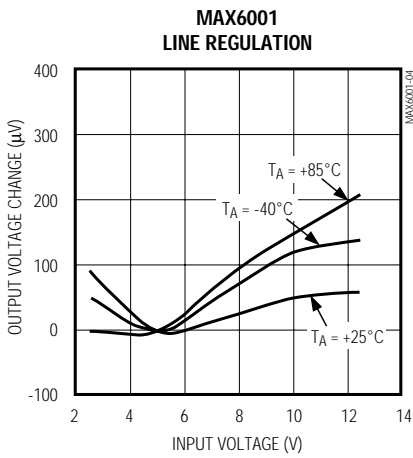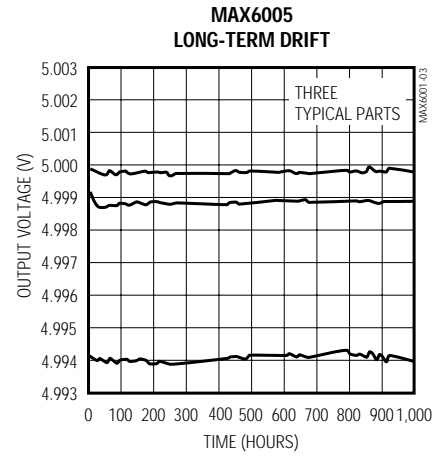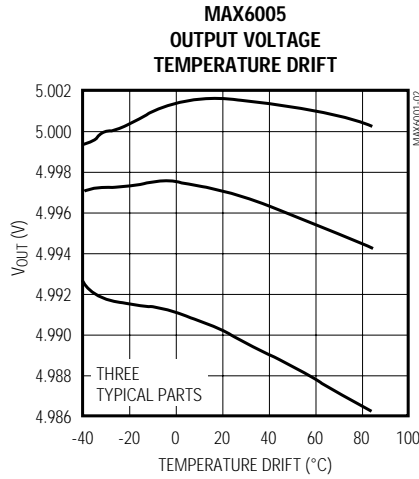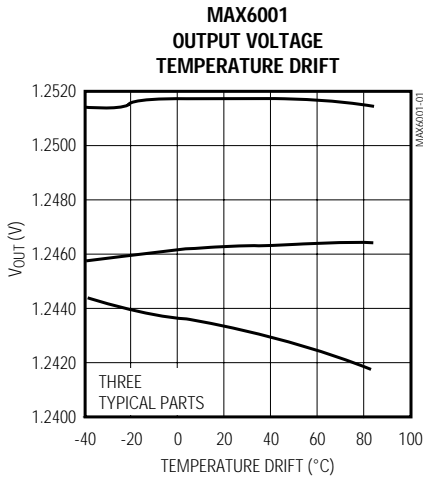

# Low-Cost, Low-Power, Low-Dropout, SOT23-3 Voltage References

## Typical Operating Characteristics (continued)

( $V_{IN} = +5V$  for MAX6001-MAX6004,  $V_{IN} = +5.5V$  for MAX6005;  $I_{OUT} = 0$ ;  $T_A = +25^\circ C$ ; unless otherwise noted.) (Note 6)

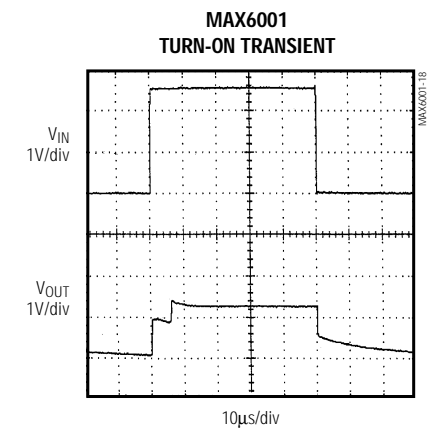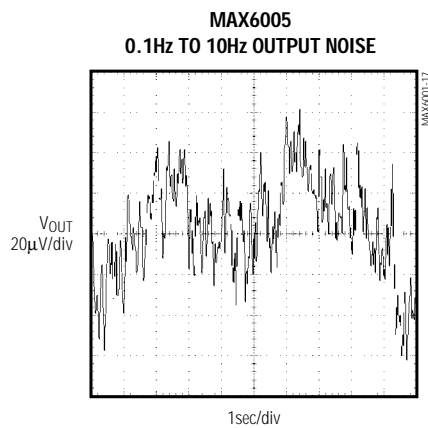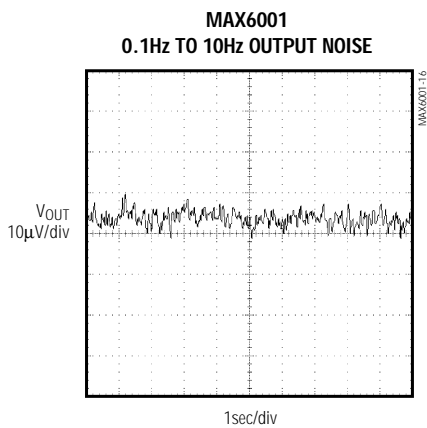
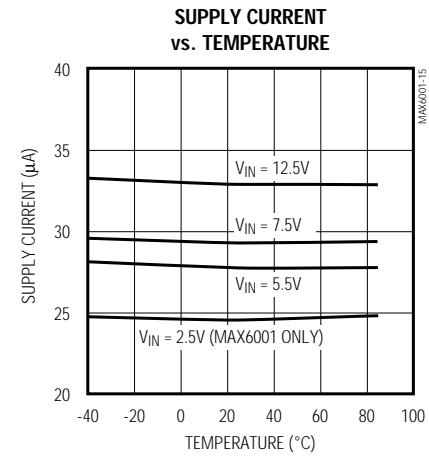
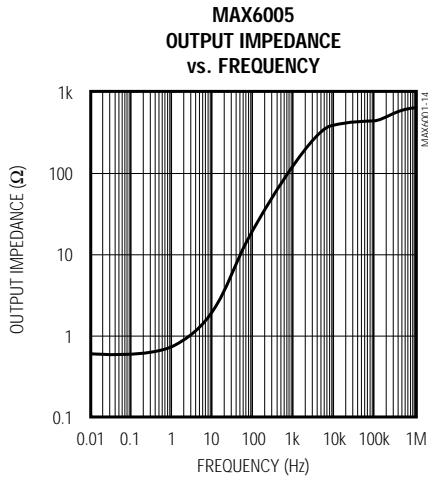
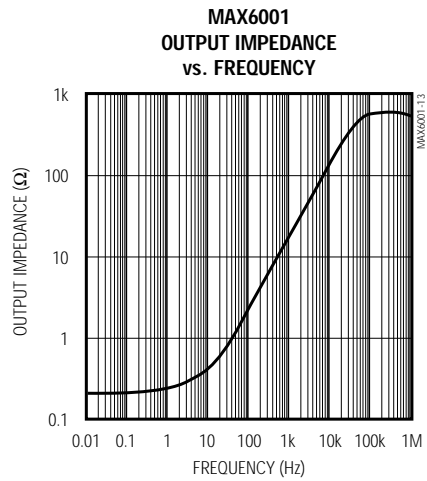
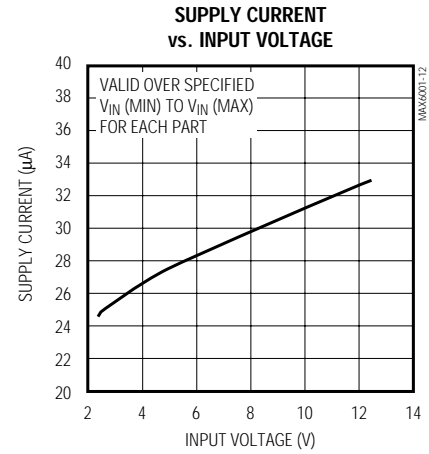
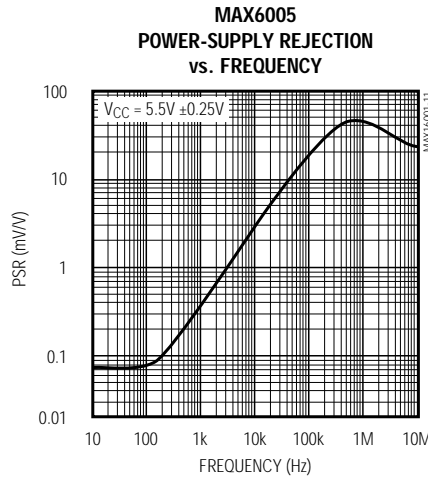
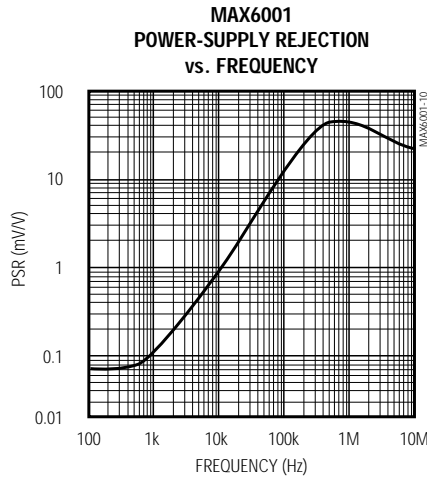


# Low-Cost, Low-Power, Low-Dropout, SOT23-3 Voltage References

MAX6001-MAX6005

## Typical Operating Characteristics (continued)

( $V_{IN} = +5V$  for MAX6001-MAX6004,  $V_{IN} = +5.5V$  for MAX6005;  $I_{OUT} = 0$ ;  $T_A = +25^\circ C$ ; unless otherwise noted.) (Note 6)

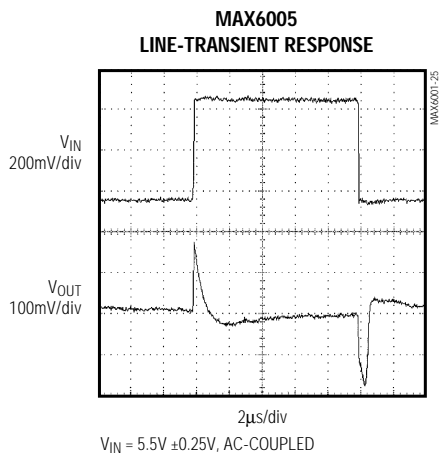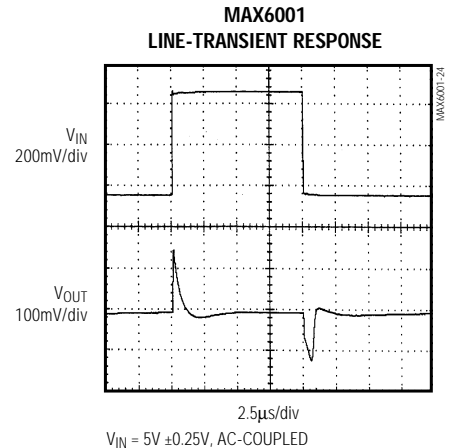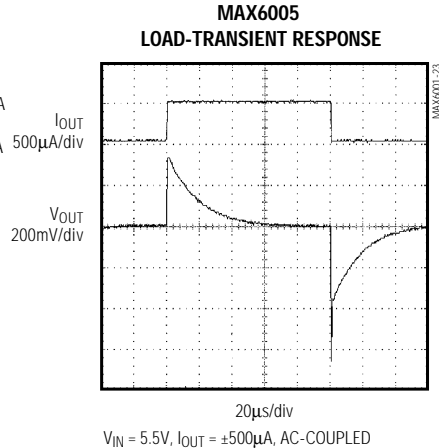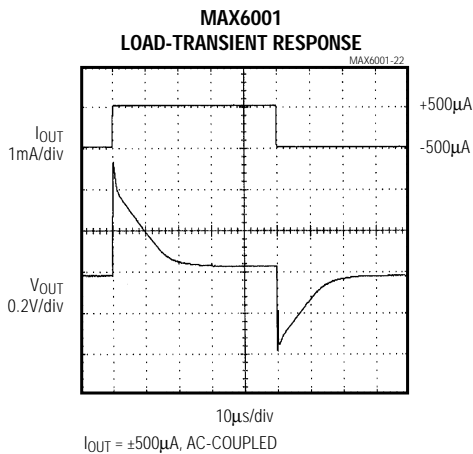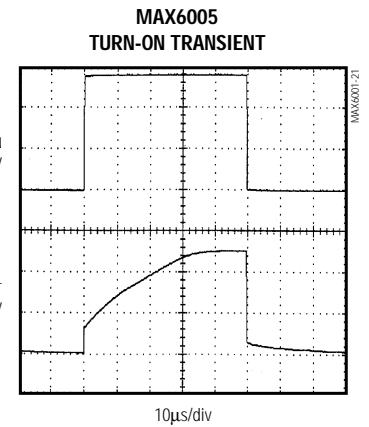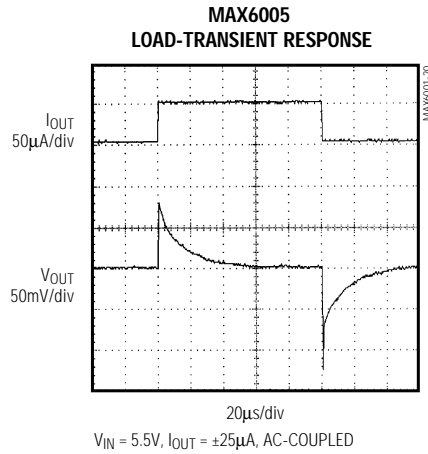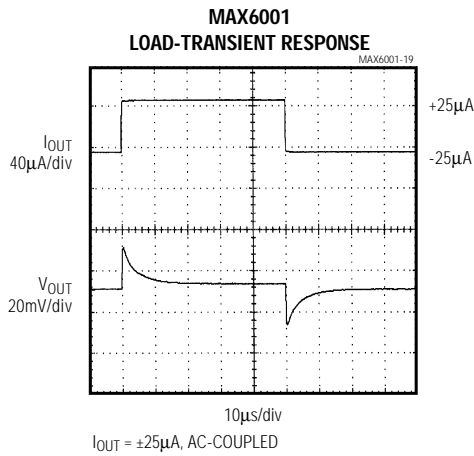

**Note 6:** Many of the *Typical Operating Characteristics* of the MAX6001 family are extremely similar. The extremes of these characteristics are found in the MAX6001 (1.2V output) and MAX6005 (5.0V output) devices. The *Typical Operating Characteristics* of the remainder of the MAX6001 family typically lie between these two extremes and can be estimated based on their output voltage.



# Low-Cost, Low-Power, Low-Dropout, SOT23-3 Voltage References

## Pin Description

| PIN | NAME | FUNCTION                 |
|-----|------|--------------------------|
| 1   | IN   | Supply Voltage Input     |
| 2   | OUT  | Reference Voltage Output |
| 3   | GND  | Ground                   |

## Detailed Description

The MAX6001-MAX6005 bandgap references offer a temperature coefficient of <math><100\text{ppm}/^\circ\text{C}</math> and initial accuracy of better than 1%. These devices can sink and source up to 400 $\mu\text{A}$  with <math><200\text{mV}</math> of dropout voltage, making them attractive for use in low-voltage applications.

## Applications Information

### Output/Load Capacitance

Devices in this family do not require an output capacitance for frequency stability. They are stable for capacitive loads from 0 to 2.2nF. However, in applications where the load or the supply can experience step changes, an output capacitor will reduce the amount of overshoot (or undershoot) and assist the circuit's transient response. Many applications do not need an external capacitor, and this family can offer a significant advantage in these applications when board space is critical.

### Supply Current

The quiescent supply current of these series-mode references is a maximum of 45 $\mu\text{A}$  and is virtually independent of the supply voltage, with only a 0.8 $\mu\text{A}/\text{V}$  variation with supply voltage. Unlike shunt-mode references, the load current of these series-mode references is drawn from the supply voltage only when required, so supply current is not wasted and efficiency is maximized over the entire supply voltage range. This improved efficiency can help reduce power dissipation and extend battery life.

When the supply voltage is below the minimum specified input voltage (as during turn-on), the devices can draw up to 200 $\mu\text{A}$  beyond the nominal supply current. The input voltage source must be capable of providing this current to ensure reliable turn-on.

### Output Voltage Hysteresis

Output voltage hysteresis is the change in the output voltage at  $T_A = +25^\circ\text{C}$  before and after the device is cycled over its entire operating temperature range. Hysteresis is caused by differential package stress appearing across the bandgap core transistors. The typical temperature hysteresis value is 130ppm.

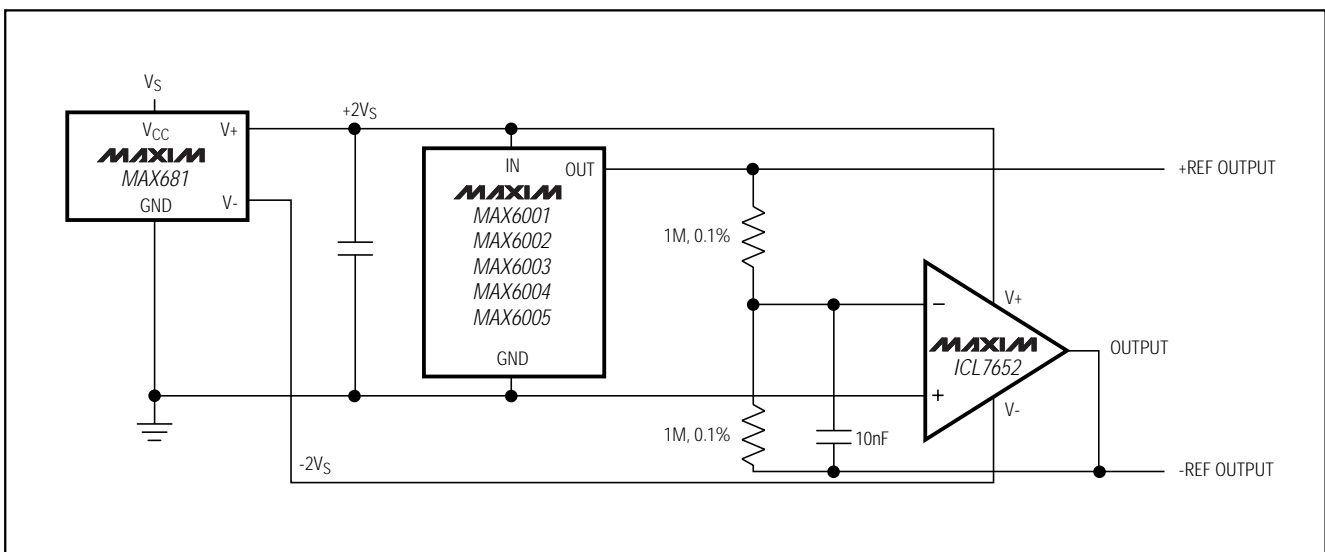


Figure 1. Positive and Negative References from Single +3V or +5V Supply

# Low-Cost, Low-Power, Low-Dropout, SOT23-3 Voltage References

## *Turn-On Time*

These devices typically turn on and settle to within 0.1% of their final value in 30 $\mu$ s to 220 $\mu$ s depending on the device. The turn-on time can increase up to 1.5ms with the device operating at the minimum dropout voltage and the maximum load.

## *Positive and Negative Low-Power Voltage Reference*

Figure 1 shows a typical method for developing a bipolar reference. The circuit uses a MAX681 voltage doubler/inverter charge-pump converter to power an ICL7652, thus creating a positive as well as a negative reference voltage.

## *Chip Information*

TRANSISTOR COUNT: 70


MAX6001-MAX6005

# Low-Cost, Low-Power, Low-Dropout, SOT23-3 Voltage References



## Package Information

**NOTES:**

1. D&E DO NOT INCLUDE MOLD FLASH.
2. MOLD FLASH OR PROTRUSIONS NOT TO EXCEED .15mm (.006")
3. CONTROLLING DIMENSION: MILLIMETER

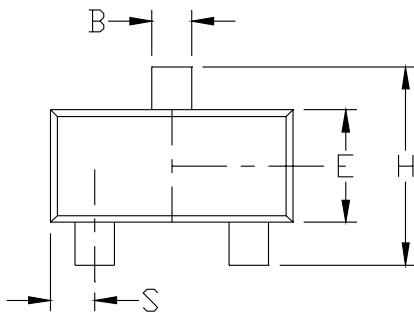

| DIM      | INCHES |       | MILLIMETERS |       |
|----------|--------|-------|-------------|-------|
|          | MIN    | MAX   | MIN         | MAX   |
| A        | 0.031  | 0.047 | 0.787       | 1.194 |
| A1       | 0.001  | 0.005 | 0.025       | 0.127 |
| B        | 0.014  | 0.022 | 0.356       | 0.559 |
| C        | 0.0034 | 0.006 | 0.086       | 0.152 |
| D        | 0.105  | 0.120 | 2.667       | 3.048 |
| E        | 0.047  | 0.055 | 1.194       | 1.397 |
| e        | 0.070  | 0.080 | 1.778       | 2.032 |
| H        | 0.082  | 0.098 | 2.083       | 2.489 |
| L        | 0.004  | 0.012 | 0.102       | 0.305 |
| S        | 0.017  | 0.022 | 0.432       | 0.559 |
| $\alpha$ | 0°     | 8°    | 0°          | 8°    |

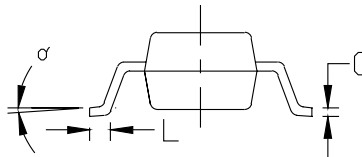

|  |                                     |                    |
|--|-------------------------------------|--------------------|
| <b>MAXIM</b>                           |                                     |                    |
| <small>PROPRIETARY INFORMATION</small> |                                     |                    |
| <small>TITLE:</small>                  |                                     |                    |
| PACKAGE OUTLINE, SOT-23, 3L            |                                     |                    |
| <small>APPROVAL</small>                | <small>DOCUMENT CONTROL NO.</small> | <small>REV</small> |
|  | 21-0051                             | C 1/1              |

SOT23-3L EPS

Maxim cannot assume responsibility for use of any circuitry other than circuitry entirely embodied in a Maxim product. No circuit patent licenses are implied. Maxim reserves the right to change the circuitry and specifications without notice at any time.

12 Maxim Integrated Products, 120 San Gabriel Drive, Sunnyvale, CA 94086 408-737-7600

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Maxim Integrated:](#)

[MAX6001EUR+T](#) [MAX6002EUR+T](#) [MAX6003EUR+T](#) [MAX6004EUR+T](#) [MAX6005EUR+T](#)