


DIMENSIONS AND IMPRINTING in inches and millimeters				
DIMENSION	INCHES		MILLIMETERS	
	MIN.	MAX.	MIN.	MAX.
A	0.031	0.040	0.79	1.02
A1	0.001	0.004	0.02	0.10
B	0.105	0.120	2.67	3.05
S	0.071	0.079	1.80	2.00
W	0.015	0.021	0.38	0.54
L	0.083	0.098	2.10	2.50
H	0.047	0.055	1.20	1.40
T	0.005	0.010	0.13	0.25
J	0.0035	0.0059	0.089	0.15
K	0.017	0.022	0.44	0.55
Ø	0	8°	0	8°

MECHANICAL SPECIFICATIONS	
Resistive Element	Passivated nichrome
Substrate Material	Silicon
Body	Molded epoxy
Terminals	Copper alloy
Lead (Pb)-free Option	100 % matte tin
Tin Lead Option	Sn85
Tin Lead and Lead (Pb)-free Finish	Plated

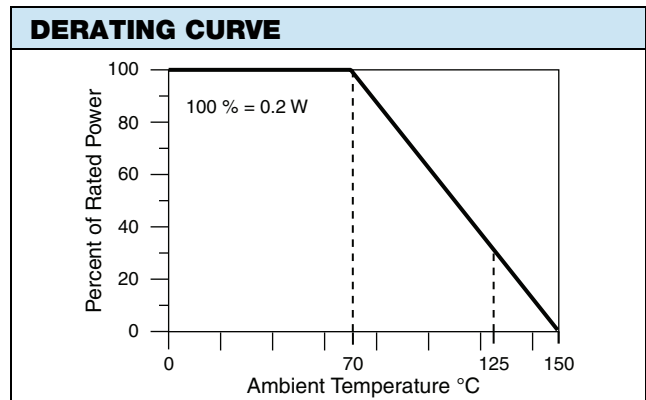

GLOBAL PART NUMBER INFORMATION																								
New Global Part Numbering: MPM1003AWS																								
M	P	M	1	0	0	3	A	W	S	M	P	M	T	1	0	0	1	5	0	0	1	A	T	1
GLOBAL MODEL (3 or 4 digits)			RESISTANCE (4 or 8 digits)				TOLERANCE AND RATIO TOLERANCE			PACKAGING														
MPM (Tin lead) MPMT (Lead (Pb)-free) (e3)			First 3 digits are significant figures and the last digit specifies the number of zeros to follow. When like values are required use total resistance. When dual values are required list both values. Example: (List R ₁ first in part number with dual values) 1002 = 10K (5K/5K) 1003 = 100K (50K/50K) 10011002 = 1K/10K divider				Abs. Tol. Ratio A = 0.1 % 0.05 % B = 0.1 % 0.1 % C = 0.25 % 0.1 % D = 0.5 % 0.1 % F = 1 % 0.5 % Z = 0.1 % ⁽¹⁾ 0.025 % Q = 0.05 % ⁽¹⁾ 0.01 %			BS = BULK 100 min., 1 mult WS = WAFFLE 100 min., 1 mult TAPE AND REEL T0 = 100 min., 100 mult T1 = 1000 min., 1000 mult ⁽²⁾ T3 = 300 min., 300 mult T5 = 500 min., 500 mult TF = Full reel 4000 TS = 100 min., 1 mult														
Historical Part Number example: MPM1002BW (for reference purposes only)																								
MPM			1002				B			W														
SERIES			RESISTANCE				TOLERANCE AND RATIO TOLERANCE			PACKAGING														

Notes

- ⁽¹⁾ Tol. available 1K and up equal values only
⁽²⁾ Preferred packaging code



Disclaimer

ALL PRODUCT, PRODUCT SPECIFICATIONS AND DATA ARE SUBJECT TO CHANGE WITHOUT NOTICE TO IMPROVE RELIABILITY, FUNCTION OR DESIGN OR OTHERWISE.

Vishay Intertechnology, Inc., its affiliates, agents, and employees, and all persons acting on its or their behalf (collectively, "Vishay"), disclaim any and all liability for any errors, inaccuracies or incompleteness contained in any datasheet or in any other disclosure relating to any product.

Vishay makes no warranty, representation or guarantee regarding the suitability of the products for any particular purpose or the continuing production of any product. To the maximum extent permitted by applicable law, Vishay disclaims (i) any and all liability arising out of the application or use of any product, (ii) any and all liability, including without limitation special, consequential or incidental damages, and (iii) any and all implied warranties, including warranties of fitness for particular purpose, non-infringement and merchantability.

Statements regarding the suitability of products for certain types of applications are based on Vishay's knowledge of typical requirements that are often placed on Vishay products in generic applications. Such statements are not binding statements about the suitability of products for a particular application. It is the customer's responsibility to validate that a particular product with the properties described in the product specification is suitable for use in a particular application. Parameters provided in datasheets and / or specifications may vary in different applications and performance may vary over time. All operating parameters, including typical parameters, must be validated for each customer application by the customer's technical experts. Product specifications do not expand or otherwise modify Vishay's terms and conditions of purchase, including but not limited to the warranty expressed therein.

Except as expressly indicated in writing, Vishay products are not designed for use in medical, life-saving, or life-sustaining applications or for any other application in which the failure of the Vishay product could result in personal injury or death. Customers using or selling Vishay products not expressly indicated for use in such applications do so at their own risk. Please contact authorized Vishay personnel to obtain written terms and conditions regarding products designed for such applications.

No license, express or implied, by estoppel or otherwise, to any intellectual property rights is granted by this document or by any conduct of Vishay. Product names and markings noted herein may be trademarks of their respective owners.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Vishay:](#)

[MPMT1001AT1](#) [MPMT1002AT5](#) [MPMT2002DT5](#) [MPMT2002AT5](#) [MPMT1003AT5](#) [MPMT10012002AWS](#)
[MPMT1002BTS](#) [MPMT50011002BT5](#) [MPMT20011002BT1](#) [MPMT10011003FT0](#) [MPMT50011002FWS](#)
[MPMT10011003AWS](#) [MPMT5000AT1](#) [MPMT50011002DWS](#) [MPMT10011002AWS](#) [MPM1002AT1](#) [MPM1003AT1](#)
[MPM20011002AT1](#) [MPM2001AT1](#) [MPM2002AT1](#) [MPM5001AT1](#) [MPMT50011002BT1](#) [MPMT50011002DT1](#)
[MPMT5002BT1](#) [MPMT2002FT1](#) [MPMT10011002AT1](#) [MPMT10014001AT1](#) [MPMT10019001AT1](#) [MPMT1002AT1](#)
[MPMT1003AT1](#) [MPMT20011002AT1](#) [MPMT20018001AT5](#) [MPMT2001AT1](#) [MPMT2002AT1](#) [MPMT5001AT1](#)
[MPMT5002AT1](#) [MPMT20018001DT0](#) [MPM1001AT5](#) [MPM2002AT5](#) [MPM5000FT5](#) [MPM5002DT5](#)
[MPM50011002BT5](#) [MPM2002FT5](#) [MPM5001AWS](#) [MPM5001DT5](#) [MPM1001AWS](#) [MPM1002AT5](#) [MPM5001AT5](#)
[MPM1003AT5](#) [MPM2001AT5](#) [MPMT20011002AWS](#) [MPM1002QT5](#) [MPM5002AWS](#) [MPM5002AT5](#) [MPM1001BT5](#)
[MPMT2001AT5](#) [MPM5002AT1](#) [MPM10019001AT1](#) [MPMT50011002AT5](#) [MPM10014001ATS](#) [MPM1001BTS](#)
[MPM20018001DT3](#) [MPM2002CT1](#) [MPM2002FT1](#) [MPM50011002BT1](#) [MPM50011002DT1](#) [MPMT1002QT1](#)
[MPMT5001DTS](#) [MPMT20018001AT1](#) [MPMT10016001AT1](#) [MPMT10011003AT1](#) [MPMT2001ATS](#)
[MPMT10015002ATS](#) [MPMT50011002AT1](#) [MPMT10012002AT5](#) [MPMT10012502AT1](#) [MPMT2003AT5](#)
[MPMT10011002ATS](#) [MPMT10012001AT1](#) [MPM2002AT0](#) [MPMT10012001AT5](#) [MPMT10011002AT5](#)
[MPMT10012002AT1](#) [MPMT4001AT1](#) [MPMT1002AT0](#) [MPMT10015001AT1](#) [MPMT2002ATS](#) [MPMT10011003AT5](#)
[MPMT10019001AT5](#) [MPMT50011002DT5](#) [MPM20011002AT5](#) [MPM10011003AT1](#) [MPM10015001AT3](#)
[MPMT10015002CT1](#) [MPM5002FTS](#) [MPM50011002AWS](#) [MPM10011003AWS](#) [MPM10019001BWS](#)
[MPM10019001AT5](#) [MPM10014001AWS](#)