


SMD Power Inductor CDRH5D28



Electrical Characteristics

Part Name	Stamp	Inductance (μ H) [within] ※1	D.C.R. (Ω) [Max.] (Typ.) (at 20°C)	Rated Current (A) ※2
CDRH5D28NP-2R5NC	2R5	2.5 \pm 30%	18m (13m)	2.60
CDRH5D28NP-3R0NC	3R0	3.0 \pm 30%	24m (18m)	2.40
CDRH5D28NP-4R2NC	4R2	4.2 \pm 30%	31m (23m)	2.20
CDRH5D28NP-5R3NC	5R3	5.3 \pm 30%	38m (28m)	1.90
CDRH5D28NP-6R2NC	6R2	6.2 \pm 30%	45m (33m)	1.80
CDRH5D28NP-8R2NC	8R2	8.2 \pm 30%	53m (39m)	1.60
CDRH5D28NP-100NC	100	10 \pm 30%	65m (48m)	1.30
CDRH5D28NP-120NC	120	12 \pm 30%	76m (56m)	1.20
CDRH5D28NP-150NC	150	15 \pm 30%	103m (76m)	1.10
CDRH5D28NP-180NC	180	18 \pm 30%	110m (82m)	1.00
CDRH5D28NP-220NC	220	22 \pm 30%	122m (90m)	0.90
CDRH5D28NP-270NC	270	27 \pm 30%	175m(130m)	0.85
CDRH5D28NP-330NC	330	33 \pm 30%	189m(140m)	0.75
CDRH5D28NP-390NC	390	39 \pm 30%	212m(157m)	0.70
CDRH5D28NP-470NC	470	47 \pm 30%	250m(185m)	0.62
CDRH5D28NP-560NC	560	56 \pm 30%	305m(226m)	0.58
CDRH5D28NP-680NC	680	68 \pm 30%	355m(263m)	0.52
CDRH5D28NP-820NC	820	82 \pm 30%	463m(343m)	0.46
CDRH5D28NP-101NC	101	100 \pm 30%	520m(385m)	0.42

※1. Inductance measuring condition: at 100kHz.


※2. Rated current: The DC current at which the inductance decreases to 65% of it's nominal value or when $\Delta t=30^{\circ}\text{C}$, whichever is lower ($T_a=20^{\circ}\text{C}$).

SMD Power Inductor CDRH5D28



Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT

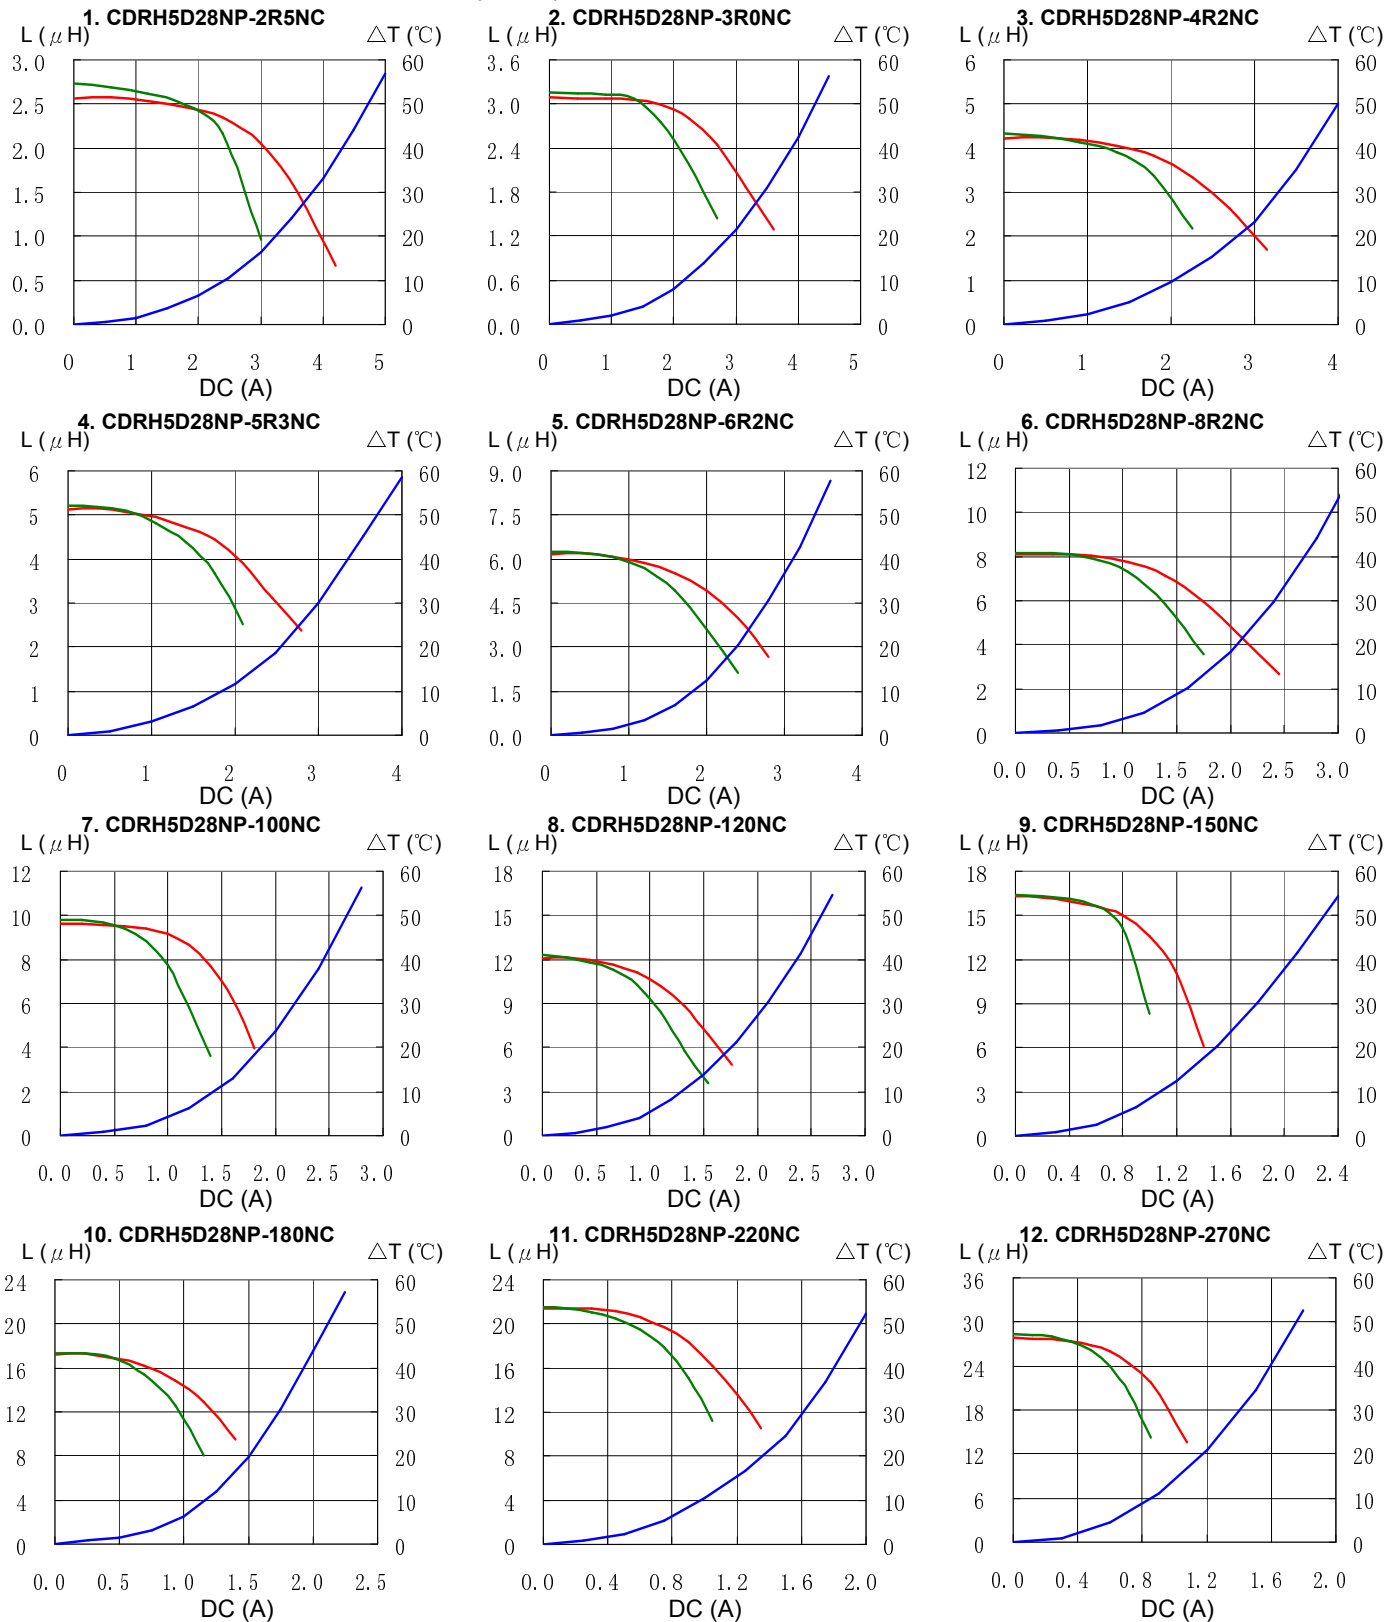


SMD Power Inductor CDRH5D28




Saturation Current & Temperature Rise Graph

— L (20°C) — L (105°C) — ΔT


13. CDRH5D28NP-330NC

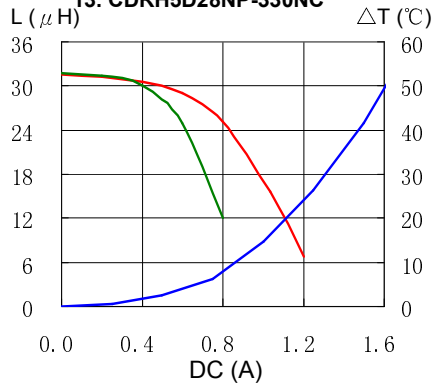


14. CDRH5D28NP-390NC

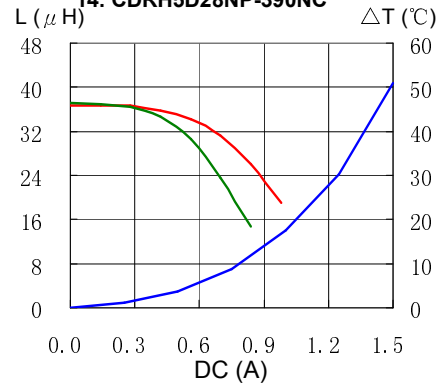


15. CDRH5D28NP-470NC

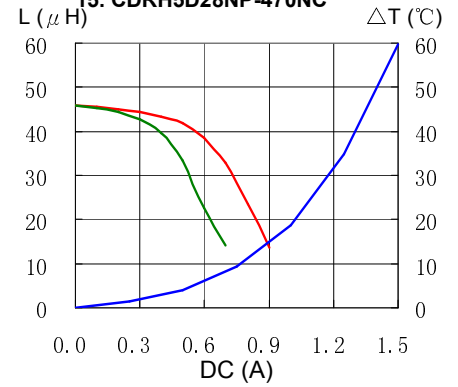


16. CDRH5D28NP-560NC

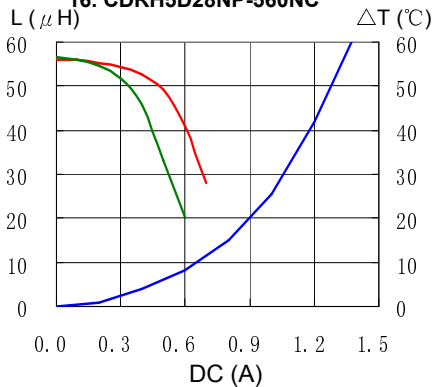


17. CDRH5D28NP-680NC

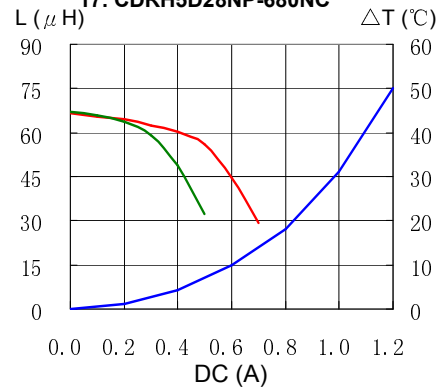

18. CDRH5D28NP-820NC

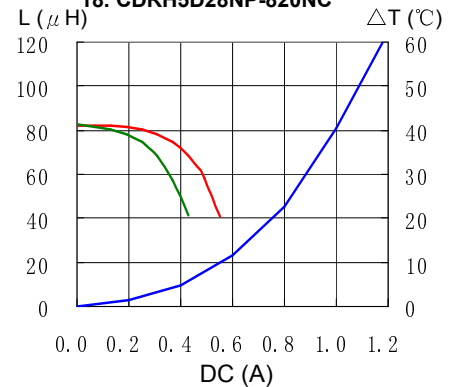



19. CDRH5D28NP-101NC

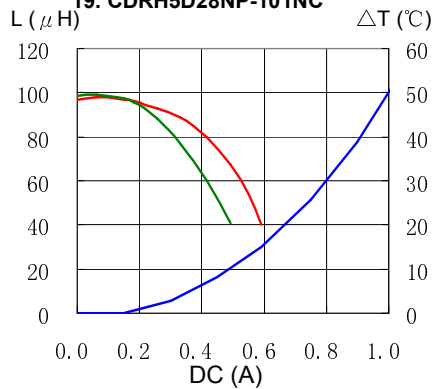

SMD Power Inductor CDRH5D28



Solder Reflow Condition

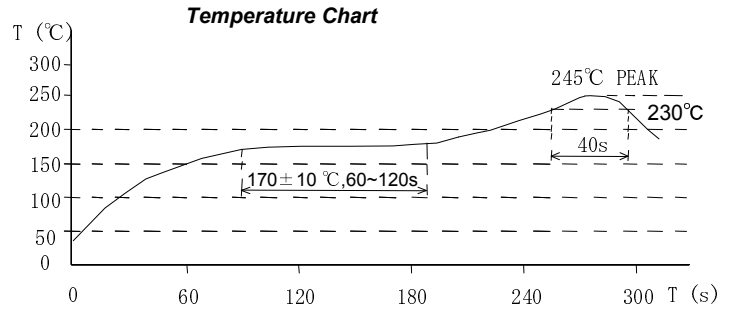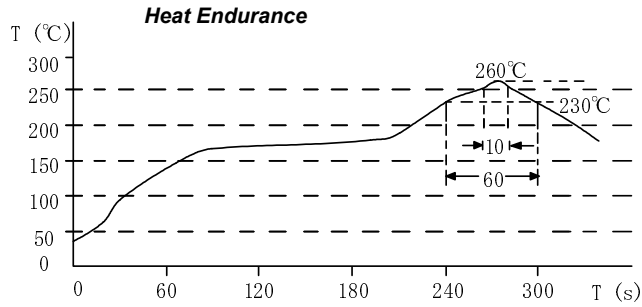

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong

Tel. +852-2880-6688
FAX. +852-2565-9600
sales@hk.sumida.com

Tokyo

Tel. +81-3-5202-7112
FAX. +81-3-5202-7105
sales@jp.sumida.com

Chicago

Tel. +1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai

Tel. +86-021-5836-3299
FAX. +86-021-5836-3266
shanghai.sales@cn.sumida.com

Seoul

Tel. +82-2-6237-0777
FAX. +82-2-6237-0778
sales@kr.sumida.com

Oberzell

Tel. +49-8591-937-0
FAX. +49-8591-937-103
contact@sumida-eu.com

Shenzhen

Tel. +86-755-8291-0228
FAX. +86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore

Tel. +65-6296-3388
FAX. +65-6296-3390
sales@sg.sumida.com

Neumarkt

Tel. +49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei

Tel. +886-2-8751-2737
FAX. +886-2-8751-2738
sales@tw.sumida.com

San Jose

Tel. +1-408-321-9660
FAX. +1-408-321-9308
sales@us.sumida.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Sumida:

[CDRH3D16/LDNP-3R3NC](#) [CDRH3D16/LDNP-4R7NC](#) [CDRH3D16/LDNP-330NC](#) [CDRH5D28NP-2R5NC](#)
[CDRH5D28NP-4R2NC](#) [CDRH5D28NP-5R3NC](#) [CDRH5D28NP-6R2NC](#) [CDRH5D28NP-8R2NC](#) [CDRH5D28NP-100NC](#)
[CDRH5D28NP-220NC](#) [CDRH8D58/LDNP-2R8NC](#) [CDRH8D58/LDNP-150NC](#) [CDRH3D16/LDNP-390NC](#)
[CDRH3D16/LDNP-220NC](#) [CDRH8D58/LDNP-6R2NC](#) [CDRH8D58/LDNP-220NC](#) [CDRH3D16/LDNP-270NC](#)
[CDRH3D16/LDNP-150NC](#) [CDRH3D16/LDNP-8R2NC](#) [CDRH3D16/LDNP-6R8NC](#) [CDRH3D16/LDNP-120NC](#)
[CDRH8D58/LDNP-3R9NC](#) [CDRH8D58/LDNP-101NC](#) [CDRH3D16/LDNP-470NC](#) [CDRH3D16/LDNP-5R6NC](#)
[CDRH8D58/LDNP-330NC](#) [CDRH3D16/LDNP-180NC](#) [CDRH3D16/LDNP-3R9NC](#) [CDRH30D18SNP-4R7NC](#)
[CDRH4D15/SNP-1R5NC](#) [CDRH5D14HPNP-120NC](#) [CDRH5D28NP-180NC](#) [CDRH5D28NP-330NC](#)
[CDRH5D14HPNP-R90NC](#) [CDRH4D15/SNP-150NC](#) [CDRH5D28NP-3R0NC](#) [CDRH30D18SNP-0R8NC](#)
[CDRH30D18SNP-1R8NC](#) [CDRH4D15/SNP-330NC](#) [CDRH5D28NP-560NC](#) [CDRH5D28NP-120NC](#) [CDRH5D14HPNP-](#)
[220NC](#) [CDRH30D18SNP-150NC](#) [CDRH30D18SNP-1R5NC](#) [CDRH30D18SNP-5R6NC](#) [CDRH30D18SNP-2R7NC](#)
[CDRH5D14HPNP-7R5NC](#) [CDRH30D18SNP-470NC](#) [CDRH4D15/SNP-6R8NC](#) [CDRH4D15/SNP-120NC](#)
[CDRH30D18SNP-8R2NC](#) [CDRH5D14HPNP-R32NC](#) [CDRH5D14HPNP-150NC](#) [CDRH30D18SNP-2R2NC](#)
[CDRH5D28NP-820NC](#) [CDRH30D18SNP-100NC](#) [CDRH4D15/SNP-270NC](#) [CDRH5D28NP-470NC](#) [CDRH5D14HPNP-](#)
[1R4NC](#) [CDRH5D14HPNP-5R1NC](#) [CDRH5D28NP-390NC](#) [CDRH4D15/SNP-3R3NC](#) [CDRH30D18SNP-1R2NC](#)
[CDRH30D18SNP-6R8NC](#) [CDRH4D15/SNP-100NC](#) [CDRH5D14HPNP-R60NC](#) [CDRH4D15/SNP-5R6NC](#)
[CDRH5D14HPNP-2R0NC](#) [CDRH4D15/SNP-220NC](#) [CDRH30D18SNP-330NC](#) [CDRH5D28NP-150NC](#) [CDRH5D28NP-](#)
[270NC](#) [CDRH3D16/LDNP-100NC](#) [CDRH62NP-271MC-B](#) [CDRH62NP-470MC-B](#) [CDRH62NP-6R8NC-B](#) [CDRH62NP-](#)
[820MC-B](#) [CDRH62NP-221MC-B](#) [CDRH62NP-220MC-B](#) [CDRH4D11NP-6R8MC](#) [CDRH4D11NP-100MC](#)
[CDRH4D11NP-220MC](#)