

ORDERING INFORMATION					
PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
S1xL (Note 1)	H	RU	G	Sub SMA	1,800 / 7" Plastic reel (8mm tape)
		RV		Sub SMA	3,000 / 7" Plastic reel (8mm tape)
		RT		Sub SMA	7,500 / 13" Paper reel (8mm tape)
		MT		Sub SMA	7,500 / 13" Plastic reel (8mm tape)
		RQ		Sub SMA	10,000 / 13" Paper reel (8mm tape)
		MQ		Sub SMA	10,000 / 13" Plastic reel (8mm tape)
		R3		Sub SMA	1,800 / 7" Plastic reel (12mm tape)
		RF		Sub SMA	3,000 / 7" Plastic reel (12mm tape)
		R2		Sub SMA	7,500 / 13" Paper reel (12mm tape)
		M2		Sub SMA	7,500 / 13" Plastic reel (12mm tape)
		RH		Sub SMA	10,000 / 13" Paper reel (12mm tape)
		MH		Sub SMA	10,000 / 13" Plastic reel (12mm tape)

Note 1: "x" defines voltage from 50V (S1AL) to 1000V (S1ML)

EXAMPLE					
PREFERRED PART NO.	PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
S1MLHRUG	S1ML	H	RU	G	AEC-Q101 qualified Green compound

RATINGS AND CHARACTERISTICS CURVES ($T_A=25^\circ\text{C}$ unless otherwise noted)






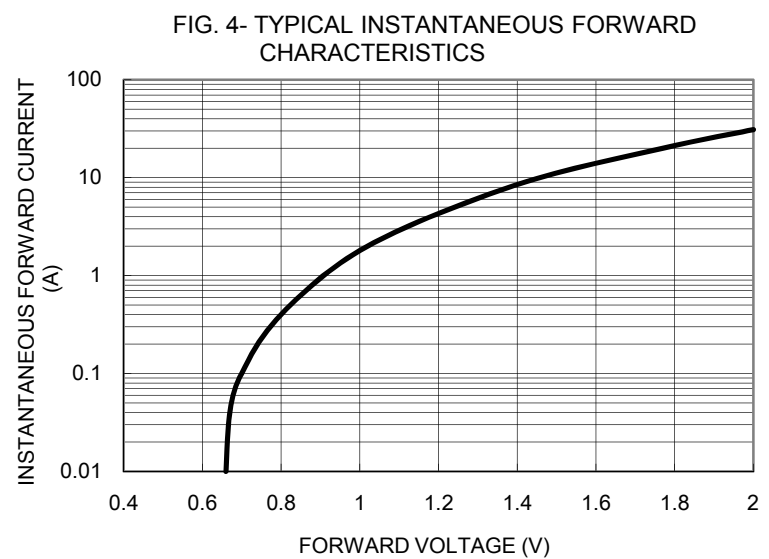


FIG. 5- TYPICAL JUNCTION CAPACITANCE

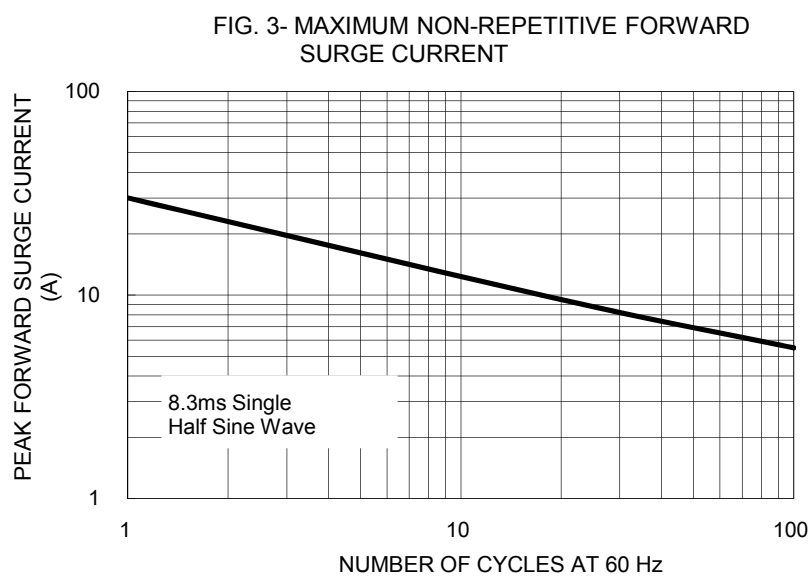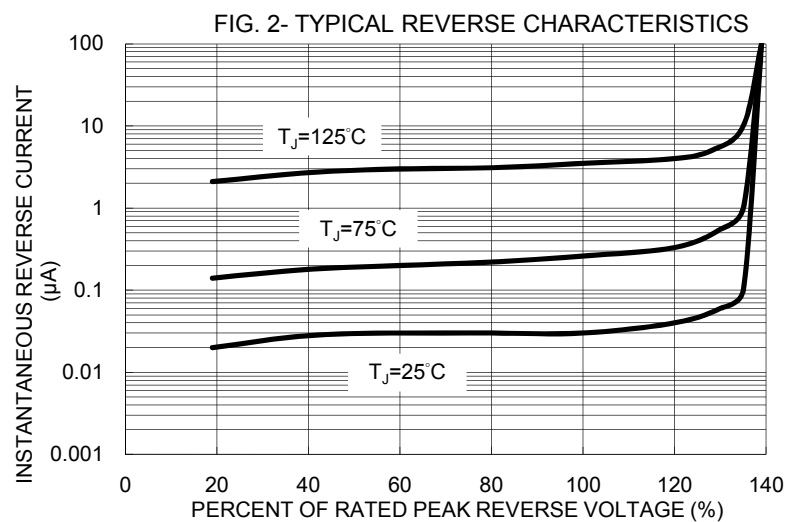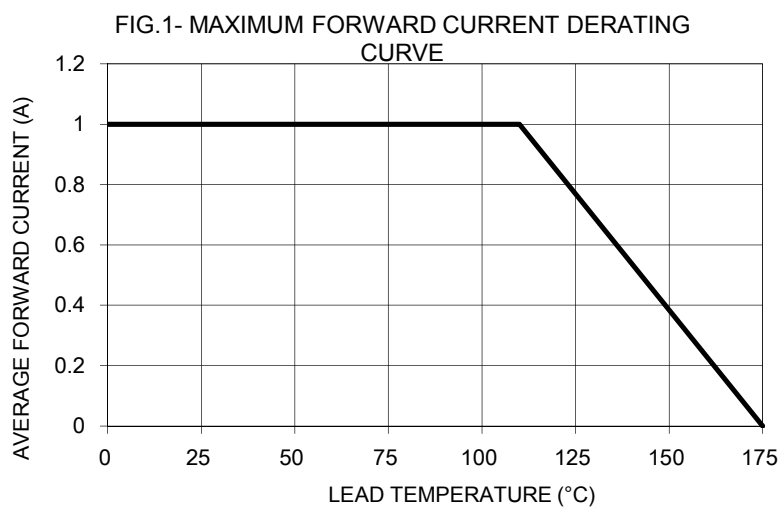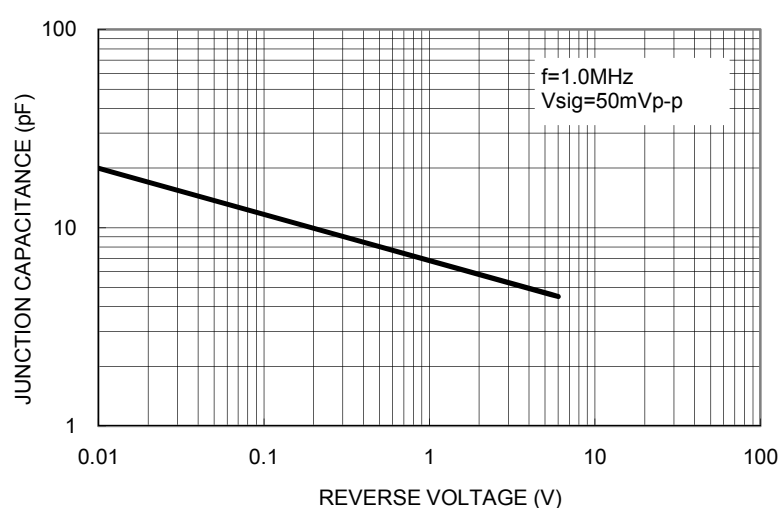


PACKAGE OUTLINE DIMENSIONS

Sub SMA

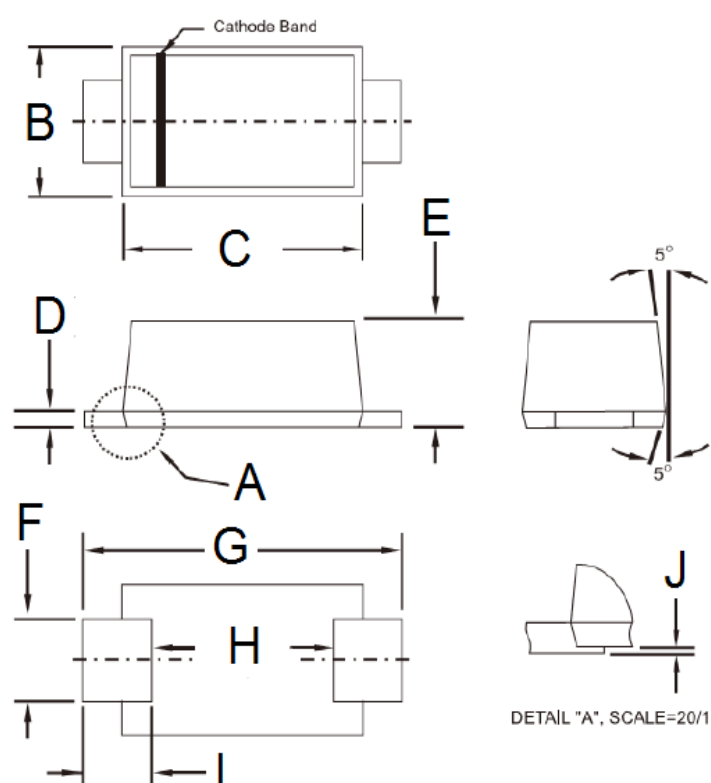

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
B	1.70	1.90	0.067	0.075
C	2.70	2.90	0.106	0.114
D	0.16	0.30	0.006	0.012
E	1.23	1.43	0.048	0.056
F	0.80	1.20	0.031	0.047
G	3.40	3.80	0.134	0.150
H	2.45	2.60	0.096	0.102
I	0.35	0.85	0.014	0.033
J	0.00	0.10	0.000	0.004

SUGGESTED PAD LAYOUT

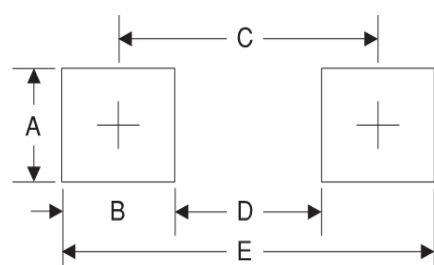

Symbol	Unit (mm)	Unit (inch)
A	1.4	0.055
B	1.2	0.047
C	3.1	0.122
D	1.9	0.075
E	4.3	0.169

MARKING DIAGRAM



- P/N = Marking Code
- G = Green compound Code
- YW = Date Code
- F = Factory Code

Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

Taiwan Semiconductor:

[S1AL](#) [S1BL](#) [S1DL](#) [S1GL](#) [S1JL](#) [S1KL](#) [S1ML](#) [S1AL R2](#) [S1BL R2](#) [S1KL R2](#) [S1DL R2](#) [S1GL R2](#) [S1DL RQG](#)
[S1JL R3](#) [S1ALHR2G](#) [S1DL R2G](#) [S1GLHR3](#) [S1GLHR3G](#) [S1JL R3G](#) [S1ALHR3G](#) [S1JLHR2](#) [S1ALHRQ](#) [S1AL R2G](#)
[S1DL R3G](#) [S1AL RQ](#) [S1JLHR2G](#) [S1JLHR3](#) [S1JL R2G](#) [S1BLHR2G](#) [S1BL RQ](#) [S1AL R3](#) [S1JLHR3G](#) [S1GLHR2](#)
[S1GLHRQG](#) [S1DLHR3G](#) [S1GLHR2G](#) [S1JLHRQG](#) [S1DLHRQG](#) [S1DL R3](#) [S1BLHR3](#) [S1BL RQG](#) [S1GL RQ](#) [S1GL](#)
[R2G](#) [S1JL RQG](#) [S1BL R3G](#) [S1DLHRQ](#) [S1JL RQ](#) [S1GL RQG](#) [S1DL RQ](#) [S1BLHRQG](#) [S1GL R3G](#) [S1AL RQG](#)
[S1AL R3G](#) [S1ALHRQG](#) [S1DLHR2G](#) [S1KL RQ](#) [S1ML R3](#) [S1ML R2G](#) [S1MLHR2G](#) [S1MLHR2](#) [S1KLHR2](#)
[S1MLHR3G](#) [S1KLHR3G](#) [S1KL RQG](#) [S1ML RQ](#) [S1MLHRQG](#) [S1KLHRQG](#) [S1KLHR2G](#) [S1ML R3G](#) [S1KL R2G](#)
[S1ML RQG](#) [S1BL R2G](#) [S1KL R3G](#) [S1BLHR3G](#) [S1BLHRQ](#) [S1ML R2](#) [S1BL R3](#) [S1GL R3](#) [S1JL R2](#) [S1KL R3](#)
[S1AL RVG](#) [S1ALHRTG](#) [S1ALHRVG](#) [S1DL RTG](#) [S1DL RUG](#) [S1DL RVG](#) [S1DLHRTG](#) [S1DLHRUG](#) [S1DLHRVG](#)
[S1JLHRTG](#) [S1JLHRUG](#) [S1JLHRVG](#) [S1GL RUG](#) [S1GLHRUG](#) [S1JL M2G](#) [S1JL RTG](#) [S1JL RUG](#) [S1JL RVG](#)
[S1MLHRUG](#) [S1MLHRVG](#)