# 1N91x, 1N4x48, FDLL914, FDLL4x48

#### **ABSOLUTE MAXIMUM RATINGS** (Values are at $T_A = 25^{\circ}C$ unless otherwise noted) (Note 1)

Rating	Symbol	Value	Unit
Maximum Repetitive Reverse Voltage	$V_{RRM}$	100	V
Average Rectified Forward Current	I <sub>O</sub>	200	mA
DC Forward Current	I <sub>F</sub>	300	mA
Recurrent Peak Forward Current	I <sub>f</sub>	400	mA
Non-repetitive Peak Forward Surge Current Pulse Width = 1.0 s	I <sub>FSM</sub>	1.0	Α
Pulse Width = 1.0 μs		4.0	Α
Storage Temperature Range	T <sub>STG</sub>	-65 to +200	°C
Operating Junction Temperature Range	TJ	-55 to +175	°C

Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

#### THERMAL CHARACTERISTICS

Parameter	Symbol	Max	Unit
Power Dissipation	$P_{D}$	500	mW
Thermal Resistance, Junction-to-Ambient	$R_{\theta JA}$	300	°C

### **ELECTRICAL CHARACTERISTICS** (Values are at $T_A = 25$ °C unless otherwise noted) (Note 2)

Symbol	Parameter		Conditions	Min	Max	Unit
V <sub>R</sub>	Breakdown Voltage		I <sub>R</sub> = 100 μA	100		V
			I <sub>R</sub> = 5.0 μA	75		V
V <sub>F</sub>	Forward Voltage	914B / 4448	I <sub>F</sub> = 5.0 mA	0.62	0.72	V
		916B	I <sub>F</sub> = 5.0 mA	0.63	0.73	V
		914 / 916 / 4148	I <sub>F</sub> = 10 mA		1.0	V
		914A / 916A	I <sub>F</sub> = 20 mA		1.0	V
		916B	I <sub>F</sub> = 20 mA		1.0	V
		914B / 4448	I <sub>F</sub> = 100 mA		1.0	V
I <sub>R</sub>	Reverse Leakage		V <sub>R</sub> = 20 V		0.025	μΑ
			V <sub>R</sub> = 20 V, T <sub>A</sub> = 150°C		50	μΑ
			V <sub>R</sub> = 75 V		5.0	μΑ
C <sub>T</sub>	Total Capacitance	916/916A/916B/4448	V <sub>R</sub> = 0, f = 1.0 MHz		2.0	pF
		914/914A/914B/4148	V <sub>R</sub> = 0, f = 1.0 MHz		4.0	pF
t <sub>rr</sub>	Reverse Recovery Time		$I_F$ = 10 mA, $V_R$ = 6.0 V (600 mA) $I_{rr}$ = 1.0 mA, $R_L$ = 100 $\Omega$		4.0	ns

Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions. 2. Non-recurrent square wave  $P_W = 8.3$  ms.

<sup>1.</sup> These ratings are limiting values above which the serviceability of the diode may be impaired.

### 1N91x, 1N4x48, FDLL914, FDLL4x48

#### TYPICAL PERFORMANCE CHARACTERISTICS




Figure 1. Reverse Voltage vs. Reverse Current  $B_V$  – 1.0 to 100  $\mu A$ 




Figure 3. Forward Voltage vs. Forward Current  $V_F$  – 1 to 100  $\mu A$ 




Figure 5. Forward Voltage vs. Forward Current  $V_F - 10$  to 800 mA




Figure 2. Reverse Current vs. Reverse Voltage

I<sub>R</sub> – 10 to 100 V




Figure 4. Forward Voltage vs. Forward Current  $V_F$  – 0.1 to 10 mA




Figure 6. Forward Voltage vs. Ambient Temperature  $V_F$  - 0.01 - 20 mA (- 40 to +65°C)

# 1N91x, 1N4x48, FDLL914, FDLL4x48

### TYPICAL PERFORMANCE CHARACTERISTICS




Figure 7. Total Capacitance




Figure 9. Average Rectified Current ( $I_{F(AV)}$ ) vs. Ambient Temperature ( $T_A$ )




Figure 8. Reverse Recovery Time vs. Reverse Recovery Current





Figure 10. Power Derating Curve



AXIAL LEAD CASE 017AG ISSUE O

**DATE 31 AUG 2016** 

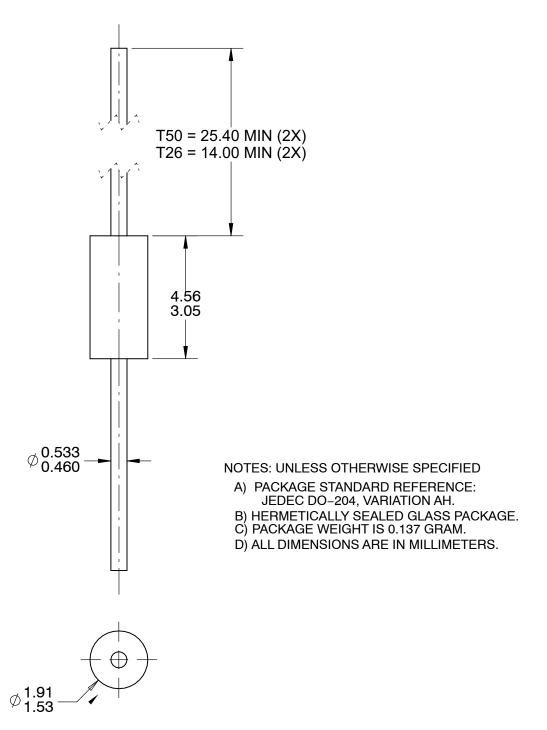


DOCUMENT NUMBER:	98AON13443G	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	AXIAL LEAD		PAGE 1 OF 1	


ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.



MiniMELF / SOD-80 CASE 100AD ISSUE O

**DATE 30 APR 2012** 





DOCUMENT NUMBER:	98AON79582E	Electronic versions are uncontrolled except when accessed directly from the Document Repository. Printed versions are uncontrolled except when stamped "CONTROLLED COPY" in red.		
DESCRIPTION:	MINIMELF / SOD-80		PAGE 1 OF 1	

ON Semiconductor and are trademarks of Semiconductor Components Industries, LLC dba ON Semiconductor or its subsidiaries in the United States and/or other countries. ON Semiconductor reserves the right to make changes without further notice to any products herein. ON Semiconductor makes no warranty, representation or guarantee regarding the suitability of its products for any particular purpose, nor does ON Semiconductor assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. ON Semiconductor does not convey any license under its patent rights nor the rights of others.

onsemi, ONSEMI, and other names, marks, and brands are registered and/or common law trademarks of Semiconductor Components Industries, LLC dba "onsemi" or its affiliates and/or subsidiaries in the United States and/or other countries. onsemi owns the rights to a number of patents, trademarks, copyrights, trade secrets, and other intellectual property. A listing of onsemi's product/patent coverage may be accessed at <a href="www.onsemi.com/site/pdf/Patent-Marking.pdf">www.onsemi.com/site/pdf/Patent-Marking.pdf</a>. Onsemi reserves the right to make changes at any time to any products or information herein, without notice. The information herein is provided "as-is" and onsemi makes no warranty, representation or guarantee regarding the accuracy of the information, product features, availability, functionality, or suitability of its products for any particular purpose, nor does onsemi assume any liability arising out of the application or use of any product or circuit, and specifically disclaims any and all liability, including without limitation special, consequential or incidental damages. Buyer is responsible for its products and applications using onsemi products, including compliance with all laws, regulations and safety requirements or standards, regardless of any support or applications provided by onsemi. "Typical" parameters which may be provided in onsemi data sheets and/or specifications can and do vary in different applications and actual performance may vary over time. All operating parameters, including "Typicals" must be validated for each customer application by customer's technical experts. onsemi does not convey any license under any of its intellectual property rights nor the rights of others. onsemi products are not designed, intended, or authorized for use as a critical component in life support systems or any EDA class 3 medical devices or medical devices with a same or similar classification in a foreign jurisdiction or any devices intended for implantation in the human body. Should Buyer pu

#### **PUBLICATION ORDERING INFORMATION**

LITERATURE FULFILLMENT: Email Requests to: orderlit@onsemi.com

onsemi Website: www.onsemi.com

TECHNICAL SUPPORT North American Technical Support: Voice Mail: 1 800-282-9855 Toll Free USA/Canada Phone: 011 421 33 790 2910

Europe, Middle East and Africa Technical Support:

Phone: 00421 33 790 2910

For additional information, please contact your local Sales Representative

# **Mouser Electronics**

**Authorized Distributor** 

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

# onsemi:

<u>1N914 FDLL4148 FDLL914 1N4148 1N4148TR 1N4448 1N914A 1N914ATR 1N914B 1N914BTR 1N916B FDLL4448 FDLL914A FDLL914B 1N4448TR 1N4148TA 1N914TR 1N916TR 1N4148-T50R 1N4148-T50A 1N4148-T50A 1N914-T50A FDLL4148-D87Z FDLL4448-D87Z</u>