






Physical Data

IRC Type	Size Code	Industry Footprint	Actual Size			
				Dimensions (Inches and (mm))		
				L	W	C
CHP 1/8	B	1206		0.128 ± 0.007 (3.25 ± 0.18)	0.057 ± 0.006 (1.45 ± 0.15)	0.020 ± 0.010 (0.51 ± 0.25)
CHP 1/2	D	2010		0.200 ± 0.010 (5.08 ± 0.25)	0.079 (nom.) -0.006 / +0.011 (2.01 (nom.) -0.15 / +0.28)	0.030 ± 0.010 (0.761 ± 0.25)
CHP 1	F	2512		0.251 ± 0.010 (6.38 ± 0.25)	0.079 (nom.) -0.006 / +0.011 (2.01 (nom.) -0.15 / +0.28)	0.040 ± 0.010 (1.02 ± 0.25)
CHP 2	H	3610		0.367 ± 0.010 (9.32 ± 0.25)	0.105 (nom.) -0.006 / +0.011 (2.67 (nom.) -0.15 / +0.28)	0.050 ± 0.010 (1.27 ± 0.25)

Recommended Solder Pad Dimensions (Reflow):

Size Code	Industry Footprint	Dimensions (Inches and mm)					
		A	B	C	D	E	F
B & C	1206	0.076 (1.93)	0.093 (2.36)	0.058 (1.47)	0.098 (2.49)	0.032 (0.81)	0.211 (5.36)
D	2010	0.111 (2.82)	0.126 (3.20)	0.096 (2.44)	0.152 (3.86)	0.040 (1.02)	0.318 (8.08)
E	2010	0.170 (4.32)	0.160 (4.06)	0.072 (1.83)	0.132 (3.35)	0.044 (1.12)	0.412 (10.46)
F	2512	0.121 (3.07)	0.126 (3.20)	0.127 (3.23)	0.183 (4.65)	0.040 (1.02)	0.369 (9.37)
H	3610	0.170 (4.32)	0.160 (4.06)	0.213 (5.41)	0.273 (6.93)	0.044 (1.12)	0.553 (14.05)

General Note


TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Standard Reel Packaging per EIA-481:


IRC Type	Size Code	Industry Footprint	Reel Diameter*	Quantity Per Reel	Carrier Tape Width	Component Pitch
CHP 1/8 MRC 1/2	B	1206	7"	2,500 max.	8mm	4mm
	C		13"	10,000 max.		
CHP 1/2 MRC 1	D	2010	7"	1,500 max.	12mm	4mm
	E		13"	5,000 max.		
CHP 1	F	2512	7"	1,500 max.	12mm	4mm
			13"	5,000 max.		
CHP 2	H	3610	13"	1,500 max.	24mm	4mm

*The 13" reel is considered standard and will be supplied unless otherwise specified.

Power Derating Curve

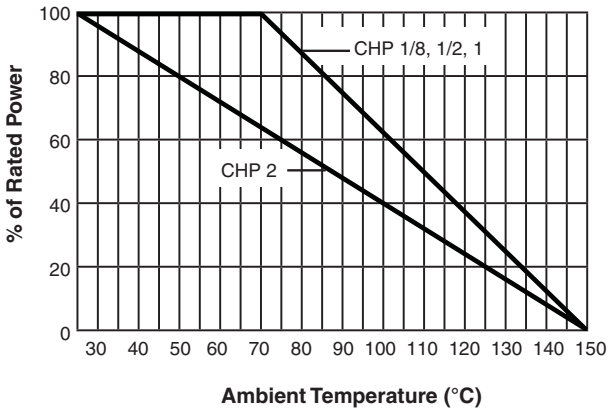

Repetitive Surge Curve

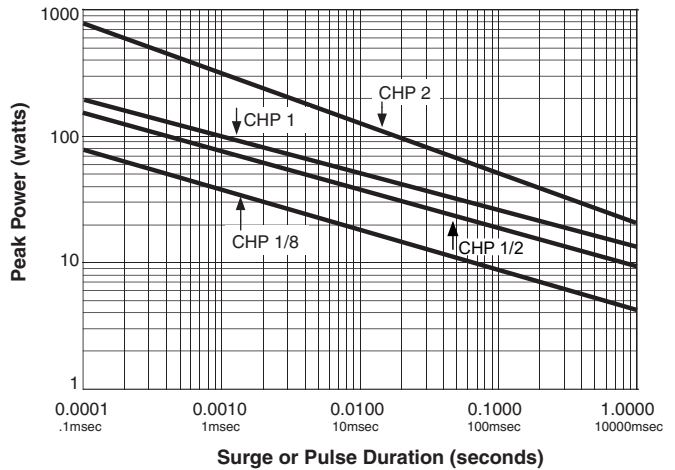

Note: Use for repetitive pulses where the average power dissipation is not to exceed the component rating at 70°C. Surge handling capacity for low-repetitive surges may be significantly greater than shown above. Contact factory for recommendations.

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability. All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Ordering Procedure

This product has two valid part numbers:

European (Welwyn) Part Number: CHP1-220KFI (CHP1 with TCR $\pm 100\text{ppm}/^\circ\text{C}$ at 220 kilohms $\pm 1\%$, Pb-free)

C	H	P	1	-	2	2	0	K	F	I
1			2		3			4		5

1 Type	2 TCR (ppm/°C)	3 Value	4 Tolerance	5 Termination & Packing	
CHP1/8	Omit for ± 100	E24 = 3/4 characters	C = $\pm 0.25\%$	I = Pb-free, standard pack	
CHP1/2	$-50 = \pm 50$	E96 = 4/5 characters	D = $\pm 0.5\%$	PB = SnPb, standard pack	
CHP1		R = ohms	F = $\pm 1\%$	CHP1/8	2500/7" reel
CHP2		K = kilohms	G = $\pm 2\%$	CHP1/2, 1	Tape 1500/7" reel
		M = megohms	J = $\pm 5\%$	CHP2	1500/13" reel
				T5 = Pb-free, 5K pack option	
				CHP1/8, 1/2 & 1	Tape 5000/13" reel

USA (IRC) Part Number: CHP11002203FLF (CHP1 with TCR $\pm 100\text{ppm}/^\circ\text{C}$ at 220 kilohms $\pm 1\%$, Pb-free)

C	H	P	1	1	0	0	2	2	0	3	F	L	F
1			2		3			4		5			

1 Type	2 TCR	3 Value	4 Tolerance	5 Termination & Packing	
CHP1/8	50 = ± 50	3 digits + multiplier	C = $\pm 0.25\%$	Omit for SnPb, Standard pack	
CHP1/2	100 = ± 100	R = ohms for values <100 ohms	D = $\pm 0.5\%$	LF = Pb-free, Standard pack	
CHP1			F = $\pm 1\%$	CHP1/8	2500/7" reel
CHP2			G = $\pm 2\%$	CHP1/2 & 1	1500/7" reel
			J = $\pm 5\%$	CHP2	1500/13" reel

General Note

TT Electronics reserves the right to make changes in product specification without notice or liability.
All information is subject to TT Electronics' own data and is considered accurate at time of going to print.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

TT Electronics:

[CHP1/8-50-2R00-F](#) [CHP1-100-3013-F](#) [CHP1-100-90R9-F](#) [CHP1-100-1R82-F](#) [CHP1-100-3900-J](#) [CHP1-100-1003-F](#)
[CHP1/2-100-4992-F](#) [CHP1-100-4020-F](#) [CHP1-100-1002-J](#) [CHP1-100-1002-F](#) [CHP1-100-6202-G](#) [CHP1-100-3R00-J](#)
[CHP1-100-R270-F](#) [CHP1-100-1R30-F](#) [CHP1-100-3R00-F](#) [CHP1-100-1502-J](#) [CHP1/8-100-1003-J](#) [CHP1/8-100-](#)
[1001-F](#) [CHP1-100-5R60-F](#) [CHP1-50-50R0-D](#) [CHP1/8-100-1001-J](#) [CHP1-100-1000-F](#) [CHP1-100-2740-F](#) [CHP1/8-](#)
[100-1R30-F](#) [CHP1-100-5600-J](#) [CHP1/8-100-1000-G](#) [CHP1-100-R200-F](#) [CHP1/8-100-1000-J](#) [CHP1/8-100-1000-F](#)
[CHP1/2-100-2R40-J](#) [CHP1/2-100-1001-J](#) [CHP1-100-5360-F](#) [CHP1/8-100-47R0-J](#) [CHP1/8-100-2002-J](#) [CHP1-100-](#)
[12R0-J](#) [CHP1/8-100-4421-F](#) [CHP1-100-4R02-F](#) [CHP1/8-100-5102-G](#) [CHP1-100-2000-F](#) [CHP1-100-2000-J](#) [CHP1-](#)
[100-39R0-F](#) [CHP1-100-3300-F](#) [CHP1-100-3300-J](#) [CHP1/8-100-3R32-F](#) [CHP1-100-6191-F](#) [CHP1-100-75R0-J](#)
[CHP1/8-50-10R0-F](#) [CHP2-100-5001-F](#) [CHP1-100-36R0-J](#) [CHP1-100-3601-J](#) [CHP1-100-3001-J](#) [CHP1-100-1621-F](#)
[CHP1/2-100-2002-J](#) [CHP1-100-47R5-F](#) [CHP1-100-10R0-J](#) [CHP1-100-10R0-F](#) [CHP1-50-1000-F](#) [CHP1/2-100-15R0-J](#)
[CHP1-100-1330-F](#) [CHP1-50-1002-F](#) [CHP1-100-33R2-F](#) [CHP1-100-3600-J](#) [CHP1/8-100-R330-F](#) [CHP1/8-100-1501-](#)
[F](#) [CHP1/8-100-6043-F](#) [CHP1-100-1201-J](#) [CHP1-100-1001-J](#) [CHP1/2-100-5000-J](#) [CHP1/8-100-R500-J](#) [CHP1/8-100-](#)
[2003-F](#) [CHP1-50-40R2-F](#) [CHP1/2-100-6810-F](#) [CHP1-100-1603-J](#) [CHP1-100-3320-F](#) [CHP1-100-R180-F](#) [CHP1/2-](#)
[100-10R0-J](#) [CHP1-50-75R0-F](#) [CHP1/8-100-10R0-J](#) [CHP1/8-100-10R0-F](#) [CHP1/8-100-22R0-J](#) [CHP1-100-1R50-J](#)
[CHP1-100-1R50-F](#) [CHP1/8-100-R400-F](#) [CHP1/8-100-1900-J](#) [CHP1-100-2R00-F](#) [CHP1-100-5603-J](#) [CHP1-100-4R70-](#)
[J](#) [CHP1/2-100-1R00-F](#) [CHP1/8-100-1500-J](#) [CHP1/8-100-1500-G](#) [CHP1-100-R330-F](#) [CHP1/2-100-1000-G](#) [CHP1/2-](#)
[100-1000-F](#) [CHP1/2-100-1000-J](#) [CHP2-100-5600-F](#) [CHP1/8-100-20R0-J](#) [CHP1-100-3R32-F](#) [CHP1/2-100-3503-F](#)
[CHP1/8-100-R200-F](#) [CHP1-100-1500-J](#)