

ORDERING INFORMATION					
PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	PACKAGE	PACKING
RS1xL (Note 1)	H	RU	G	Sub SMA	1,800 / 7" Plastic reel (8mm tape)
		RV		Sub SMA	3,000 / 7" Plastic reel (8mm tape)
		RT		Sub SMA	7,500 / 13" Paper reel (8mm tape)
		MT		Sub SMA	7,500 / 13" Plastic reel (8mm tape)
		RQ		Sub SMA	10,000 / 13" Paper reel (8mm tape)
		MQ		Sub SMA	10,000 / 13" Plastic reel (8mm tape)
		R3		Sub SMA	1,800 / 7" Plastic reel (12mm tape)
		RF		Sub SMA	3,000 / 7" Plastic reel (12mm tape)
		R2		Sub SMA	7,500 / 13" Paper reel (12mm tape)
		M2		Sub SMA	7,500 / 13" Plastic reel (12mm tape)
		RH		Sub SMA	10,000 / 13" Paper reel (12mm tape)
		MH		Sub SMA	10,000 / 13" Plastic reel (12mm tape)

Note 1: "x" defines voltage from 50V (RS1AL) to 1000V (RS1ML)

EXAMPLE					
PREFERRED PART NO.	PART NO.	PART NO. SUFFIX	PACKING CODE	PACKING CODE SUFFIX	DESCRIPTION
RS1MLHRUG	RS1ML	H	RU	G	AEC-Q101 qualified Green compound

**RATINGS AND CHARACTERISTICS CURVES**

(T<sub>A</sub>=25°C unless otherwise noted)

FIG.1 FORWARD CURRENT DERATING CURVE

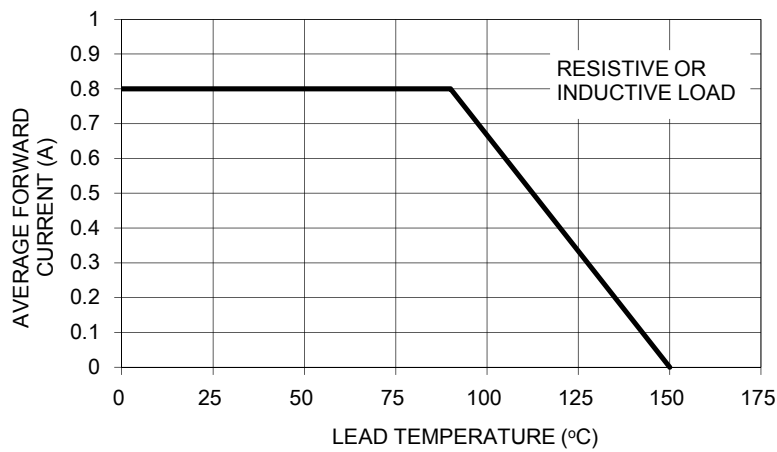


FIG. 2 TYPICAL REVERSE CHARACTERISTICS

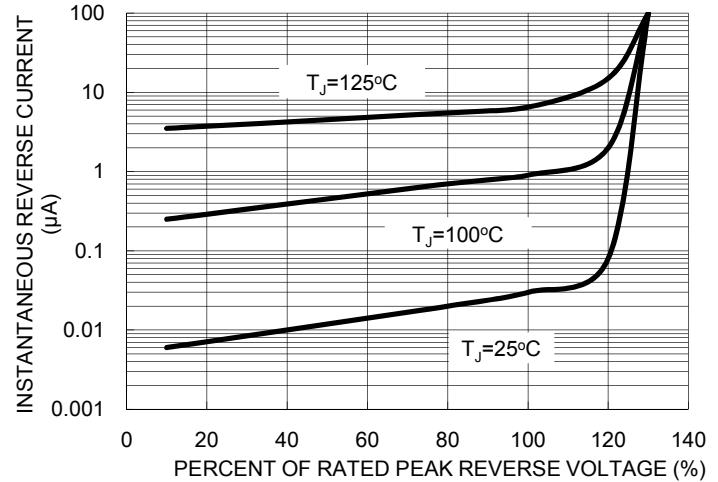


FIG. 3 MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

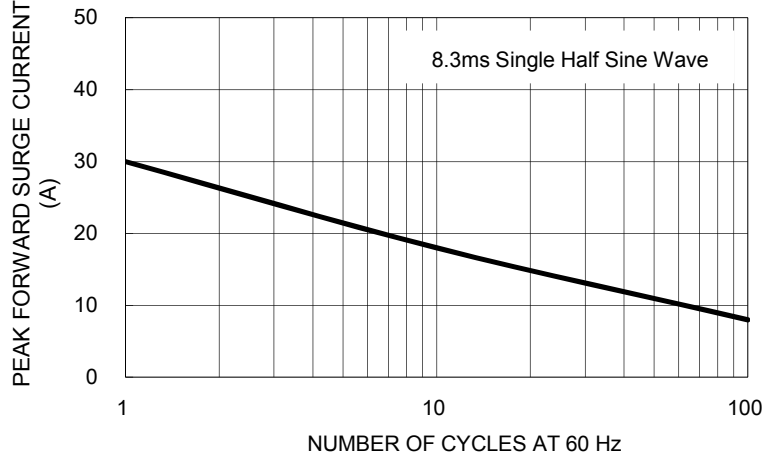


FIG. 4 TYPICAL FORWARD CHARACTERISTICS

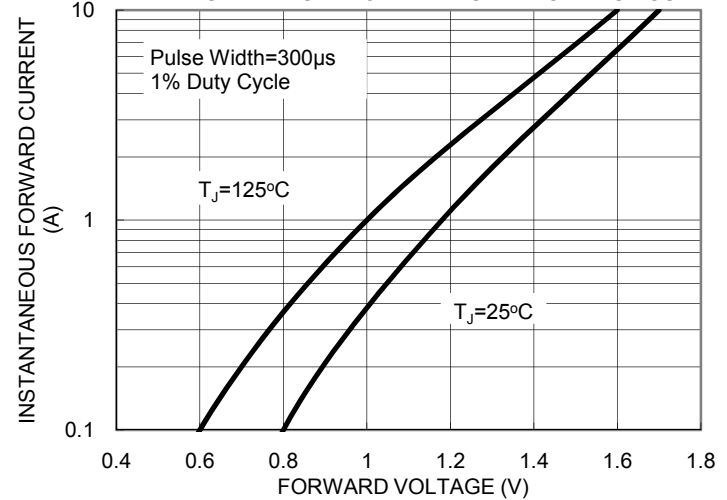


FIG. 5 TYPICAL JUNCTION CAPACITANCE



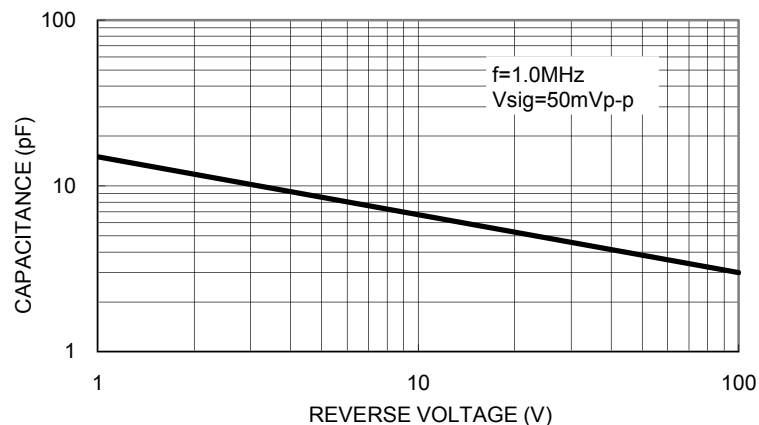


FIG.6- REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

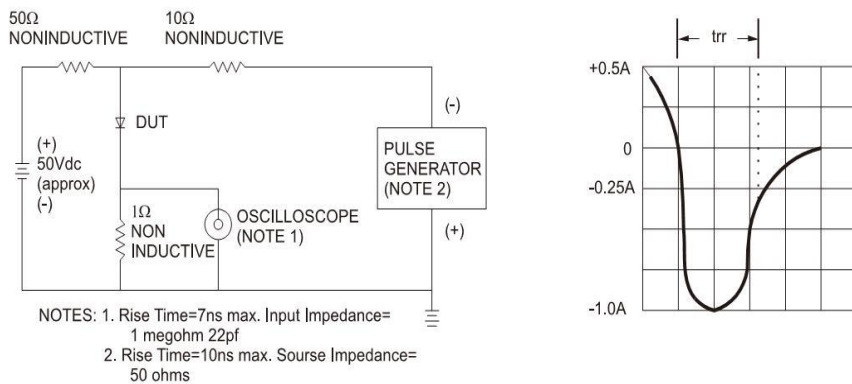


PACKAGE OUTLINE DIMENSIONS

Sub SMA

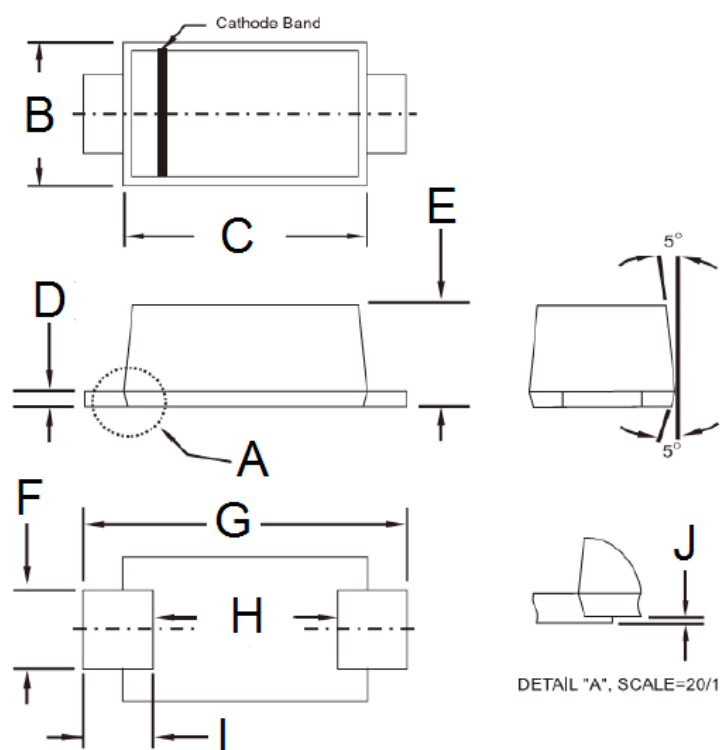

DIM.	Unit (mm)		Unit (inch)	
	Min	Max	Min	Max
B	1.70	1.90	0.067	0.075
C	2.70	2.90	0.106	0.114
D	0.16	0.30	0.006	0.012
E	1.23	1.43	0.048	0.056
F	0.80	1.20	0.031	0.047
G	3.40	3.80	0.134	0.150
H	2.45	2.60	0.096	0.102
I	0.35	0.85	0.014	0.033
J	0.00	0.10	0.000	0.004

SUGGESTED PAD LAYOUT

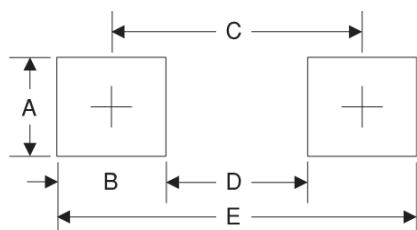

Symbol	Unit (mm)	Unit (inch)
A	1.4	0.055
B	1.2	0.047
C	3.1	0.122
D	1.9	0.075
E	4.3	0.169

MARKING DIAGRAM



- P/N = Marking Code
- G = Green compound Code
- YW = Date Code
- F = Factory Code

## Notice

Specifications of the products displayed herein are subject to change without notice. TSC or anyone on its behalf, assumes no responsibility or liability for any errors or inaccuracies.

Information contained herein is intended to provide a product description only. No license, express or implied, to any intellectual property rights is granted by this document. Except as provided in TSC's terms and conditions of sale for such products, TSC assumes no liability whatsoever, and disclaims any express or implied warranty, relating to sale and/or use of TSC products including liability or warranties relating to fitness for a particular purpose, merchantability, or infringement of any patent, copyright, or other intellectual property right.

The products shown herein are not designed for use in medical, life-saving, or life-sustaining applications. Customers using or selling these products for use in such applications do so at their own risk and agree to fully indemnify TSC for any damages resulting from such improper use or sale.

# Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

## Taiwan Semiconductor:

[RS1AL](#) [RS1BL](#) [RS1DL](#) [RS1GL](#) [RS1JL](#) [RS1KL](#) [RS1ML](#) [RS1BLHR2G](#) [RS1AL RQ](#) [RS1JLHR2](#) [RS1KL RQG](#)  
[RS1MLHR2G](#) [RS1MLHR2](#) [RS1ALHR2G](#) [RS1KLHR3](#) [RS1GL RQG](#) [RS1JL RQG](#) [RS1BLHR3G](#) [RS1DLHRQG](#)  
[RS1BL R3G](#) [RS1KL R2](#) [RS1JLHR2G](#) [RS1GLHR2G](#) [RS1AL R2](#) [RS1AL R3G](#) [RS1DL R2G](#) [RS1AL RQG](#) [RS1GL](#)  
[R3G](#) [RS1JL R2](#) [RS1GLHR3G](#) [RS1BL R2G](#) [RS1ML RQ](#) [RS1KLHR2G](#) [RS1DLHR3G](#) [RS1JL R3G](#) [RS1DL R3G](#)  
[RS1AL R2G](#) [RS1BLHRQG](#) [RS1GLHRQG](#) [RS1JLHRQG](#) [RS1JL R2G](#) [RS1ALHR3G](#) [RS1ALHRQG](#) [RS1ML R3G](#)  
[RS1MLHR3G](#) [RS1MLHRQG](#) [RS1GL R2G](#) [RS1DLHR2G](#) [RS1ML RQG](#) [RS1KLHRQG](#) [RS1KLHR3G](#) [RS1BL RQG](#)  
[RS1DL RQG](#) [RS1KL R2G](#) [RS1JLHR3G](#) [RS1ML R2G](#) [RS1KL R3G](#) [RS1KLHR2](#) [RS1KL RQ](#) [RS1BL R2](#) [RS1ML R2](#)  
[RS1DL R2](#) [RS1GL R2](#) [RS1KL R3](#) [RS1JL R3](#) [RS1DL R3](#) [RS1ML R3](#) [RS1BL R3](#) [RS1AL R3](#) [RS1GL R3](#) [RS1KL](#)  
[RUG](#) [RS1KL RVG](#) [RS1JL RVG](#) [RS1JLHM2G](#) [RS1JL M2G](#) [RS1JL RTG](#) [RS1JL RUG](#) [RS1DL RUG](#) [RS1DL RVG](#)  
[RS1MLHRVG](#) [RS1DL RFG](#) [RS1DL RTG](#) [RS1ML RTG](#) [RS1ML RUG](#) [RS1ML RVG](#) [RS1MLHRUG](#) [RS1BL RFG](#)  
[RS1BL RUG](#) [RS1BL RVG](#) [RS1GL RUG](#) [RS1GL RVG](#) [RS1AL RVG](#) [RS1ALHRUG](#) [RS1ALH](#) [RS1BLH](#) [RS1DLH](#)  
[RS1GLH](#) [RS1JLH](#) [RS1KLH](#) [RS1MLH](#)