

SMD Power Inductor CDRH8D48/A



Electrical Characteristics

Part No.	Stamp	Inductance [μ H] [Within] ※1	D.C.R. (m Ω) [Max.](Typ.) (at 20°C)	Rated current (A) (at 125°C) ※2
CDRH8D48/ANP-100MC	100	10 μ H \pm 20%	38(30)	2.26
CDRH8D48/ANP-120MC	120	12 μ H \pm 20%	50(40)	1.87
CDRH8D48/ANP-150MC	150	15 μ H \pm 20%	63(50)	1.62
CDRH8D48/ANP-180MC	180	18 μ H \pm 20%	75(60)	1.58
CDRH8D48/ANP-220MC	220	22 μ H \pm 20%	88(70)	1.45
CDRH8D48/ANP-270MC	270	27 μ H \pm 20%	106(85)	1.33
CDRH8D48/ANP-330MC	330	33 μ H \pm 20%	125(100)	1.20
CDRH8D48/ANP-390MC	390	39 μ H \pm 20%	156(125)	1.06
CDRH8D48/ANP-470MC	470	47 μ H \pm 20%	188(150)	1.00
CDRH8D48/ANP-560MC	560	56 μ H \pm 20%	238(190)	0.89
CDRH8D48/ANP-680MC	680	68 μ H \pm 20%	275(220)	0.82
CDRH8D48/ANP-820MC	820	82 μ H \pm 20%	312(250)	0.73
CDRH8D48/ANP-101MC	101	100 μ H \pm 20%	394(315)	0.70
CDRH8D48/ANP-121MC	121	120 μ H \pm 20%	438(350)	0.63
CDRH8D48/ANP-151MC	151	150 μ H \pm 20%	580(465)	0.58

※1. Inductance measuring condition: at 100 kHz.













※2. Rated current: The DC current at which the inductance decreases to 65% of its nominal value or when $\Delta t=30^{\circ}\text{C}$, whichever is lower.

SMD Power Inductor CDRH8D48/A



Saturation Current & Temperature Rise Graph

— L (20°C) — L (125°C) — ΔT

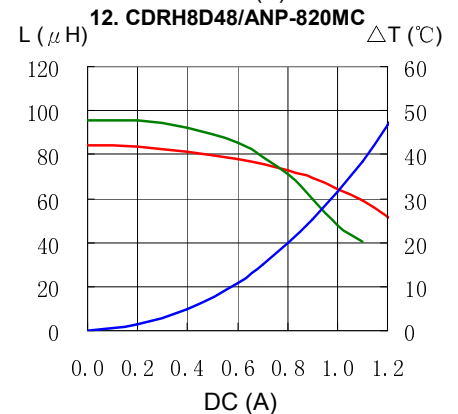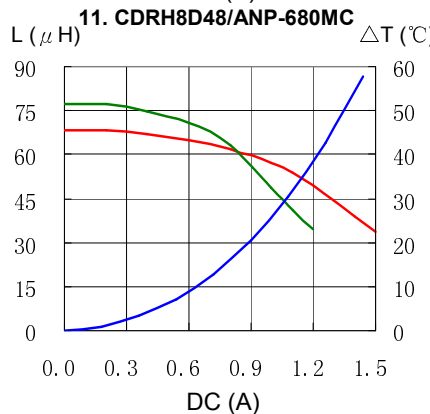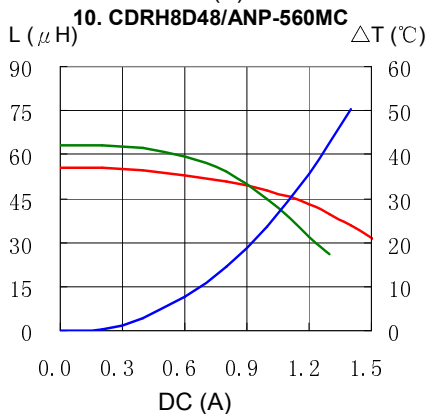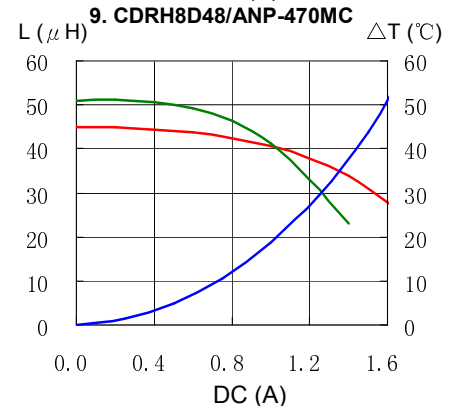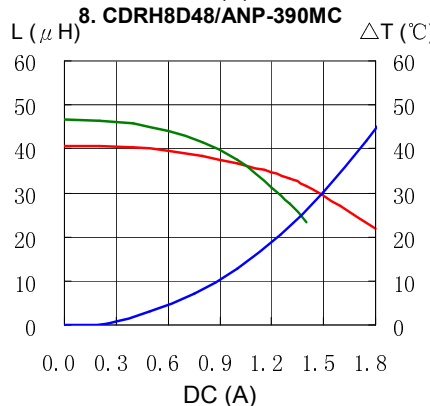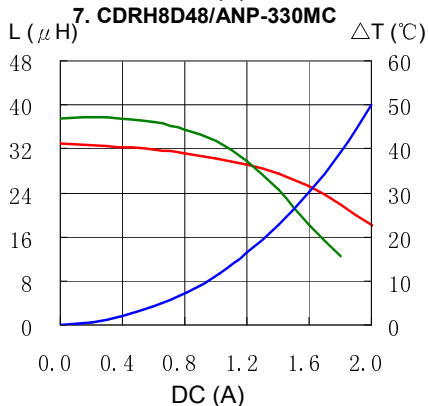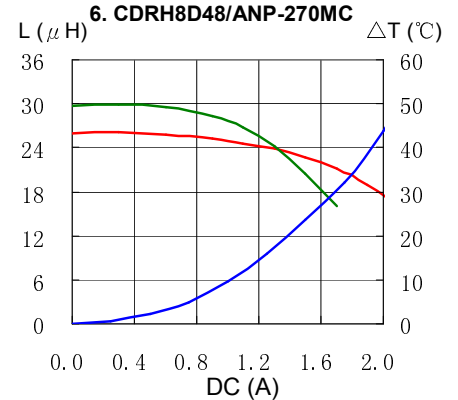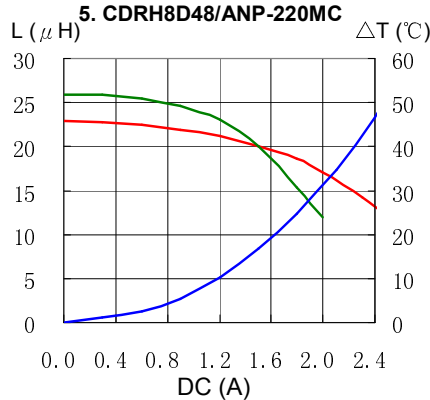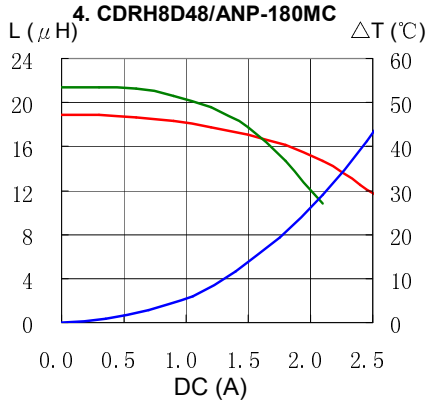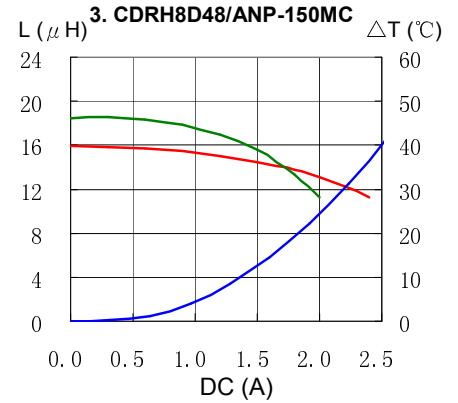
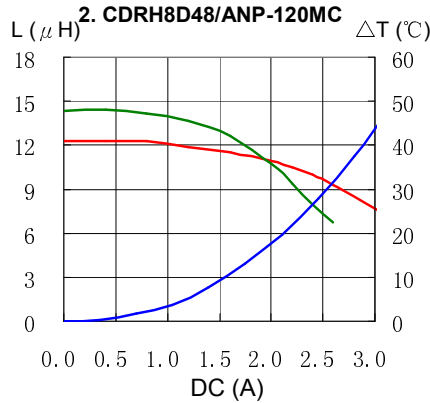
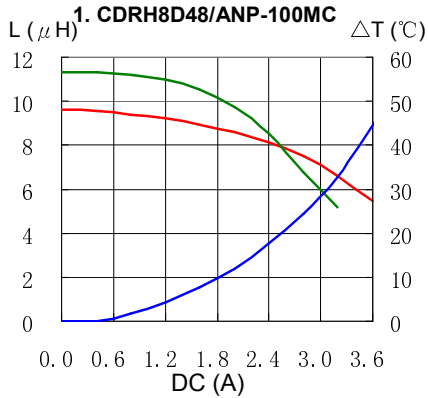


SMD Power Inductor CDRH8D48/A





Saturation Current & Temperature Rise Graph

— L (20°C) — L (125°C) — ΔT

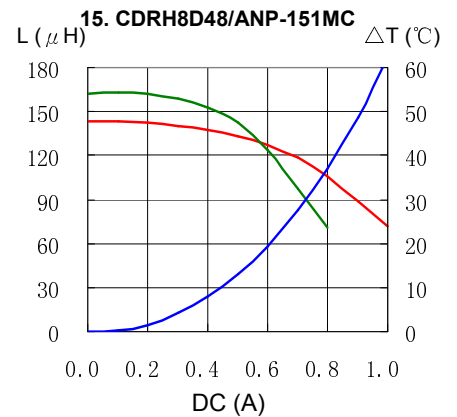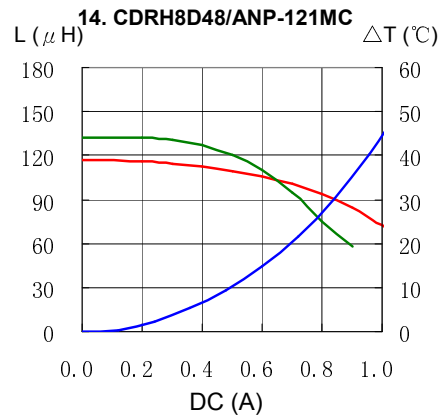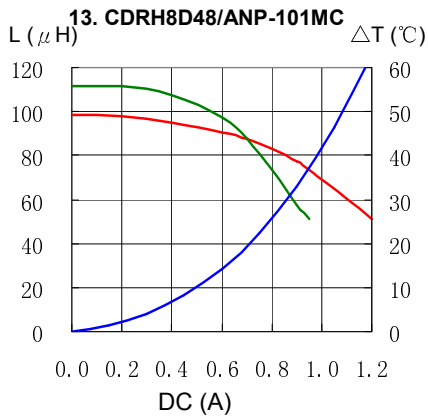

Solder Reflow Condition

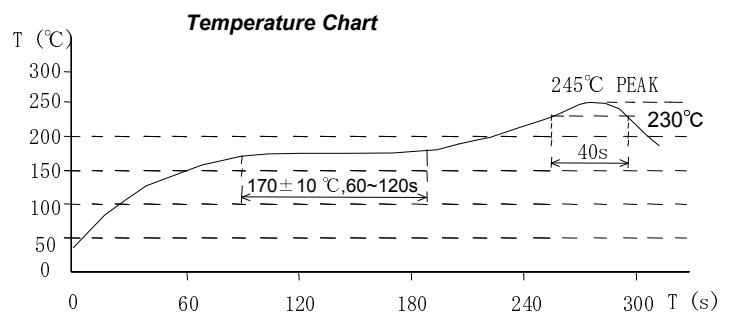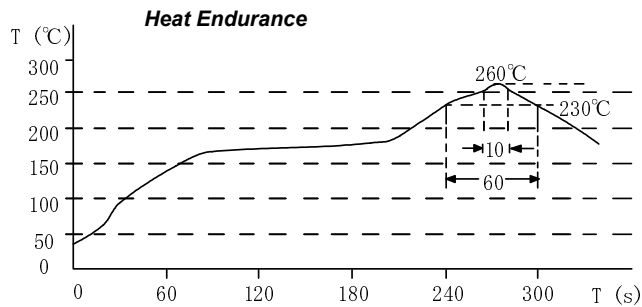

Please refer to the sales offices on our website - <http://www.sumida.com>

Hong Kong
Tel.+852-2880-6781
FAX.+852-2565-9600
sales@hk.sumida.com

Saitama(Japan)
Tel.+81-48-691-7300
FAX.+81-48-691-7340
sales@jp.sumida.com

Chicago
Tel.+1-847-545-6700
FAX. +1-847-545-6720
sales@us.sumida.com

Shanghai
Tel.+86-21-5836-3299
FAX.+86-21-5836-3266
shanghai.sales@cn.sumida.com

Seoul
Tel.+82-2-6237-0777
FAX.+82-2-6237-0778
sales@kr.sumida.com

Oberzell
Tel.+49-8591-937-0
FAX. +49-8591-937-103
contact@eu.sumida.com

Shenzhen
Tel.+86-755-8291-0228
FAX.+86-755-8291-0338
shenzhen.sales@cn.sumida.com

Singapore
Tel.+65-6296-3388
FAX.+65-6841-4426
sales@sg.sumida.com

Neumarkt
Tel.+49-9181-4509-110
FAX. +49-9181-4509-310
infocomp@eu.sumida.com

Taipei
Tel.+886-2-8751-2737
FAX.+886-2-8751-2738
sales@tw.sumida.com

San Jose
Tel.+1-408-321-9660
FAX.+1-408-321-9308
sales@us.sumida.com