


Typical Applications Circuit

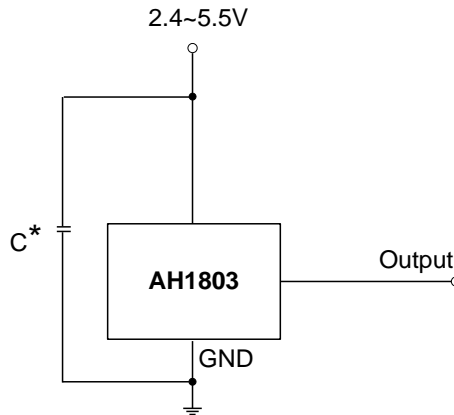


* C is for power stabilization and to strengthen the noise immunity, the recommended capacitance is 10nF~100nF.

Pin Descriptions

| Pin Name | P/I/O | Description |
|----------|-------|--------------------|
| Vdd | P/I | Power Supply Input |
| GND | P/I | Ground |
| Output | O | Output Pin |
| NC | — | No Connected |

Functional Block Diagram

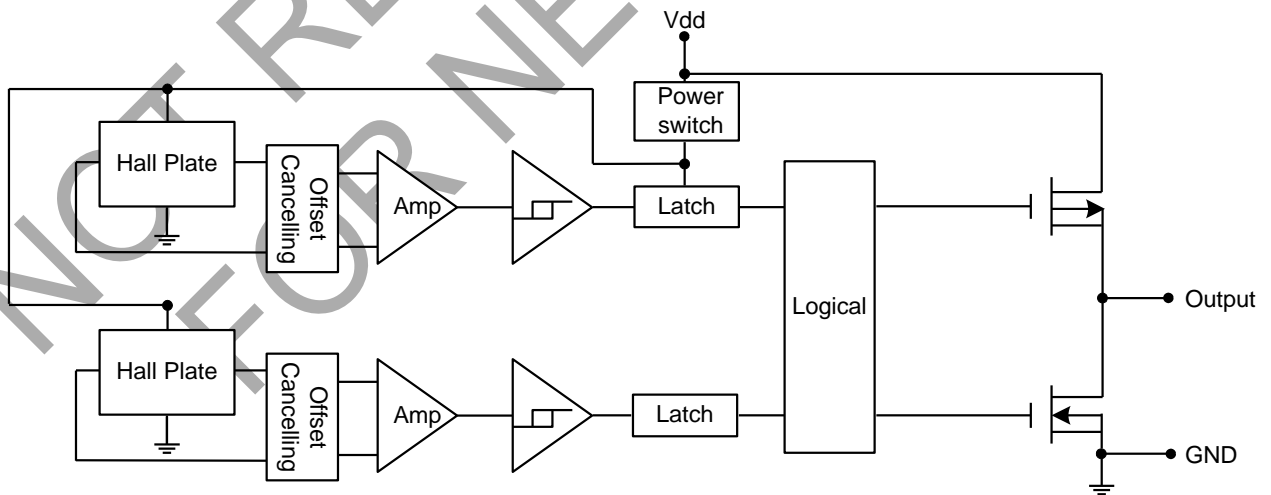

Absolute Maximum Ratings (@ $T_A = +25^\circ\text{C}$, unless otherwise specified.)

| Symbol | Characteristics | Values | Unit | |
|-----------------|------------------------------|-------------|------|----|
| V _{DD} | Supply Voltage | 7 | V | |
| B | Magnetic Flux Density | Unlimited | | |
| T _S | Storage Temperature Range | -65 to +150 | °C | |
| P _D | Package Power Dissipation | SC59 | 230 | mW |
| | | DFN2020-6 | 230 | mW |
| T _J | Maximum Junction Temperature | +150 | °C | |


Recommended Operating Conditions (@ $T_A = +25^\circ\text{C}$, unless otherwise specified.)

| Symbol | Parameter | Conditions | Rating | Unit |
|-----------------|-----------------------------|------------|------------|------|
| V _{DD} | Supply Voltage | Operating | 2.4 ~ 5.5 | V |
| T _A | Operating Temperature Range | Operating | -40 to +85 | °C |

Electrical Characteristics (@ $T_A = +25^\circ\text{C}$, unless otherwise specified.)

| Symbol | Characteristic | Conditions | Min | Typ. | Max | Unit |
|----------------------|--|--|----------------------|------|-----|------|
| V _{OH} | Output On Voltage (High Side) | I _{OUT} = -1mA | V _{DD} -0.2 | — | — | V |
| V _{OL} | Output On Voltage (Low Side) | I _{OUT} = 1mA | — | — | 0.1 | V |
| I _{DD(en)} | Supply Current | Chip enable, T _A = +25°C, V _{DD} = 3V | — | 3 | 6 | mA |
| | | Chip enable, T _A = -40°C ~ +85°C, V _{DD} = 2.4V ~ 5.5V | — | 3 | 9 | mA |
| I _{DD(dis)} | | Chip disable, T _A = +25°C, V _{DD} = 3V | — | 5 | 10 | μA |
| | | Chip disable, T _A = -40°C ~ +85°C, V _{DD} = 2.4V ~ 5.5V | — | 5 | 18 | μA |
| I _{DD(ave)} | Average supply current, T _A = +25°C, V _{DD} = 3V | | — | 8 | 16 | μA |
| | | Average supply current, T _A = -40°C ~ +85°C, V _{DD} = 2.4 ~ 5.5V | — | 8 | 27 | μA |
| t _{awake} | Awake Time | (Note 5) | — | 75 | 150 | μs |
| t _{period} | Period | (Note 5) | — | 75 | 150 | ms |
| D.C. | Duty Cycle | — | — | 0.1 | — | % |


Note: 5. When power is initially on, the operating V_{DD} (2.4V to 5.5V) must be applied to be guaranteed for the output sampling. The output state is valid after the second operating phase (typical 150ms).

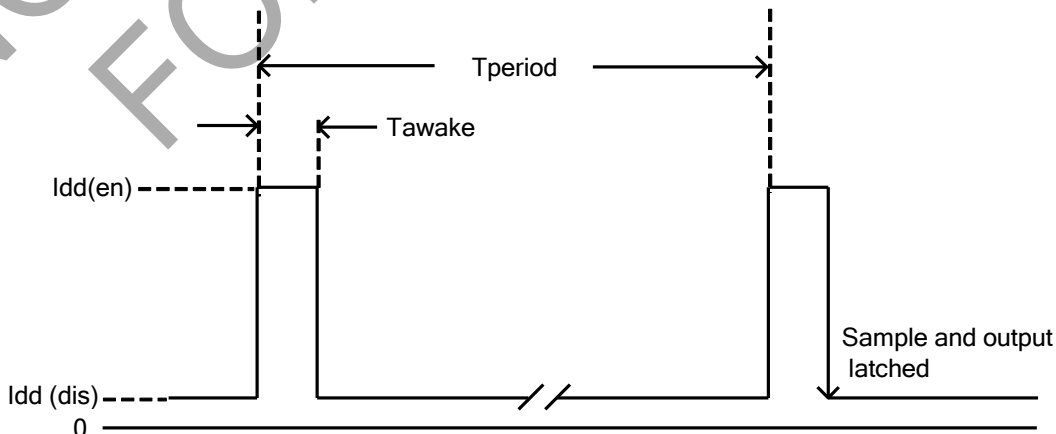

Magnetic Characteristics ($T_A = +25^\circ\text{C}$; $V_{dd} = 3\text{V}$) (Notes 6 and 7)

| Symbol | Parameter | Min | Typ. | Max | Unit |
|---------------------------------|-----------------|-----|------|-----|------|
| Bops (South Pole to Brand Side) | Operation Point | 2 | 3 | 4 | mT |
| Bopn (North Pole to Brand Side) | | -4 | -3 | -2 | |
| Brps (South Pole to Brand Side) | Release Point | 1 | 2 | — | |
| Brpn (North Pole to Brand Side) | | — | -2 | -1 | |
| Bhy (Bopx - Brpx) | Hysteresis | 0.5 | 1 | — | |

Notes: 6. Typical data is at $T_A = +25^\circ\text{C}$, $V_{dd} = 3\text{V}$, and for design information only.
7. Magnetic characteristics are for design information, which will vary with supply voltage, operating temperature, and after soldering.

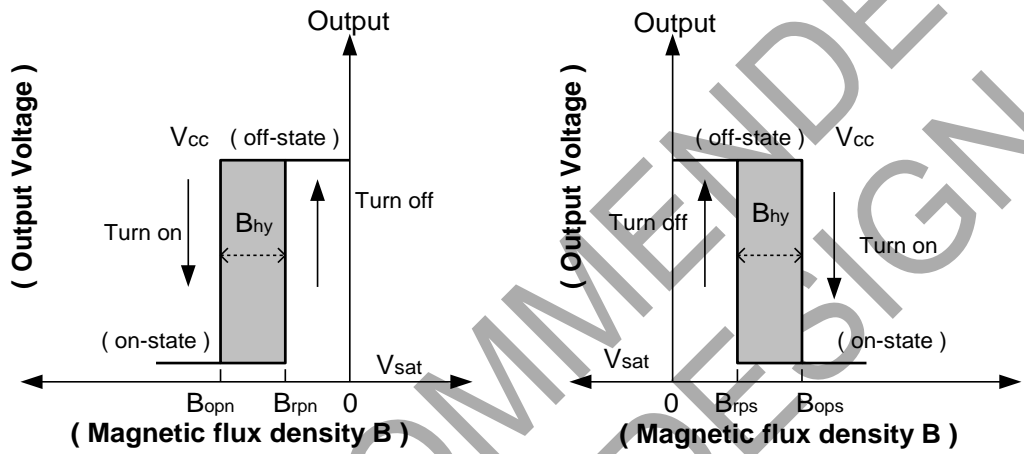


Performance Characteristics


(1) SC59 (commonly known as SOT23 in Asia) and DFN2020-6

| T_A ($^\circ\text{C}$) | 25 | 50 | 60 | 70 | 80 | 85 | 90 | 100 | 110 | 120 | 130 | 140 | 150 |
|----------------------------|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|-----|
| PD (mW) | 230 | 184 | 166 | 147 | 129 | 120 | 110 | 92 | 74 | 55 | 37 | 18 | 0 |

PD (mW) Power Dissipation Curve

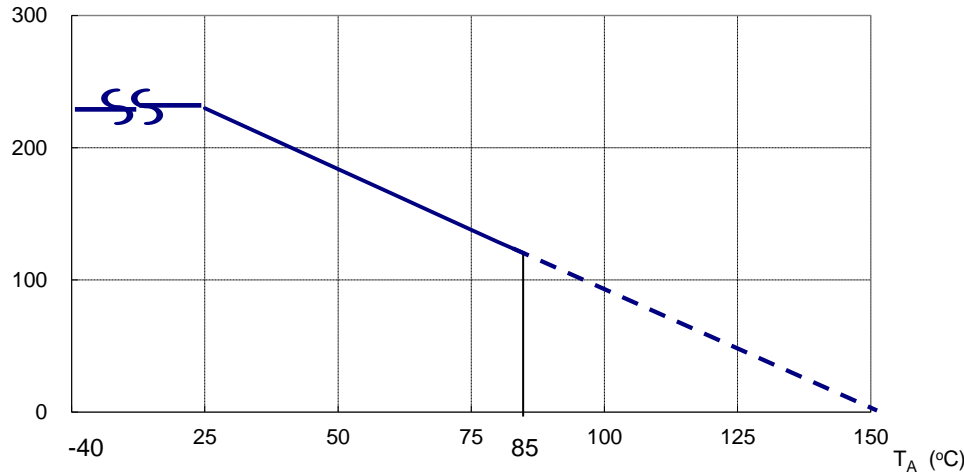

Ordering Information

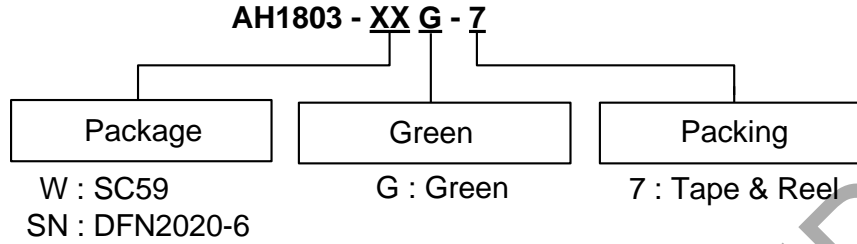


| Product | Status (Note 9) | Package Code | Packaging (Note 8) | 7" Tape and Reel | |
|--------------|-----------------|--------------|--------------------|------------------|--------------------|
| | | | | Quantity | Part Number Suffix |
| AH1803-WG-7 | NRND | W | SC59 | 3000/Tape & Reel | -7 |
| AH1803-SNG-7 | NRND | SN | DFN2020-6 | 3000/Tape & Reel | -7 |

Notes: 8. Pad layout as shown on Diodes Incorporated's suggested pad layout document, which can be found at <http://www.diodes.com/package-outlines.html>.
9. NRND = Not Recommended for New Design.

Marking Information

(1) SC59 (Commonly known as SOT23 in Asia)

(Top View)




XX : Identification code
Y : Year 0~9
W : Week : A~Z : 1~26 week;
a~z : 27~52 week; z represents
52 and 53 week
X : A~Z : Green

| Part Number | Package | Identification Code |
|-------------|---------|---------------------|
| AH1803 | SC59 | KD |

(2) DFN2020-6

(Top View)



Pin 1 indicator
XX : Identification Code
Y : Year : 0~9
W : Week : A~Z : 1~26 week;
a~z : 27~52 week; z represents
52 and 53 week
X : A~Z : Green


| Part Number | Package | Identification Code |
|-------------|-----------|---------------------|
| AH1803 | DFN2020-6 | KD |

Package Outline Dimensions (All dimensions in mm.)

Please see <http://www.diodes.com/package-outlines.html> for the latest version.

(1) Package Type: SC59 (Commonly known as SOT23 in Asia)


SC59

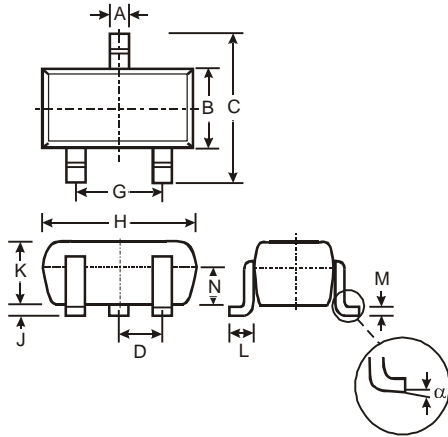

| SC59 | | | |
|----------------------|-------|------|------|
| Dim | Min | Max | Typ |
| A | 0.35 | 0.50 | 0.38 |
| B | 1.50 | 1.70 | 1.60 |
| C | 2.70 | 3.00 | 2.80 |
| D | - | - | 0.95 |
| G | - | - | 1.90 |
| H | 2.90 | 3.10 | 3.00 |
| J | 0.013 | 0.10 | 0.05 |
| K | 1.00 | 1.30 | 1.10 |
| L | 0.35 | 0.55 | 0.40 |
| M | 0.10 | 0.20 | 0.15 |
| N | 0.70 | 0.80 | 0.75 |
| □.0° 8° - | | | |
| All Dimensions in mm | | | |

(2) Package Type: DFN2020-6


DFN2020-6

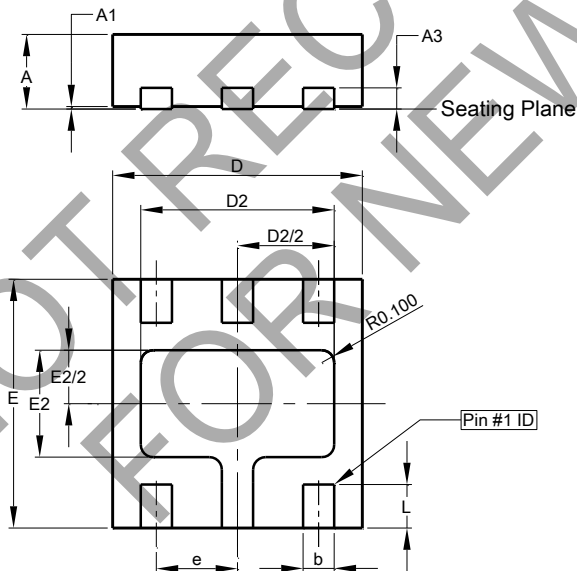

| DFN2020-6 | | | |
|----------------------|------|-------|------|
| Dim | Min | Max | Typ |
| A | 0.57 | 0.63 | 0.60 |
| A1 | 0 | 0.05 | 0.03 |
| A3 | - | - | 0.15 |
| b | 0.20 | 0.30 | 0.25 |
| D | 1.95 | 2.075 | 2.00 |
| D2 | 1.45 | 1.65 | 1.55 |
| e | - | - | 0.65 |
| E | 1.95 | 2.075 | 2.00 |
| E2 | 0.76 | 0.96 | 0.86 |
| L | 0.30 | 0.40 | 0.35 |
| All Dimensions in mm | | | |

Taping Orientation

DFN2020-6

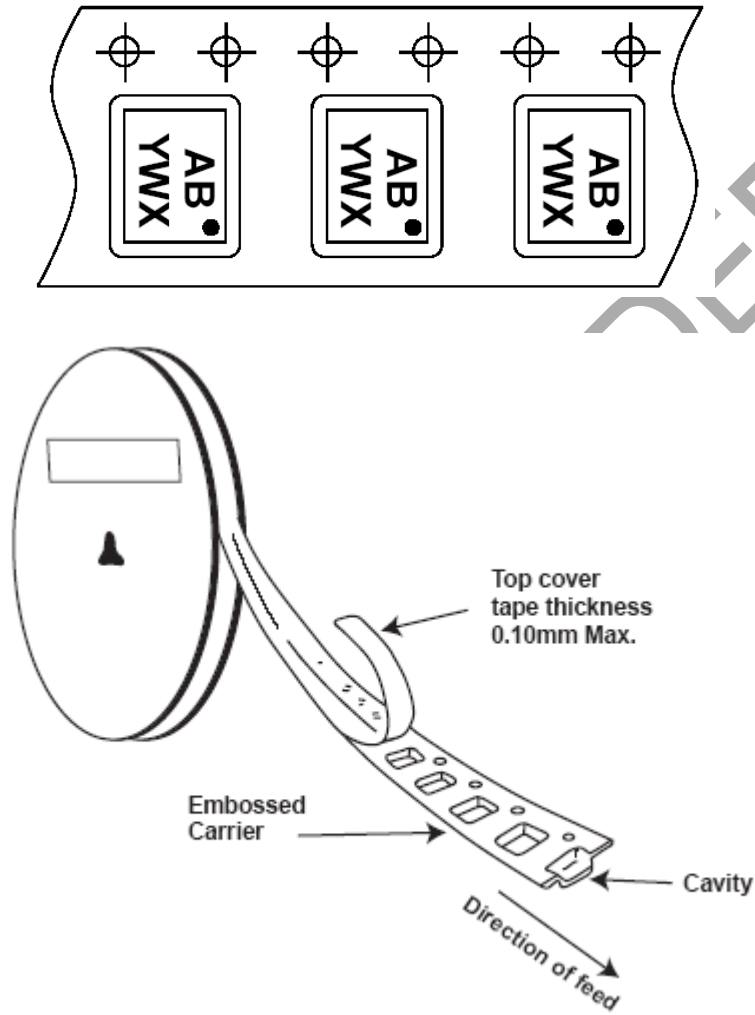

Notes: 10. The taping orientation of the other package type can be found on our website at <http://www.diodes.com/datasheets/ap02007.pdf>.

IMPORTANT NOTICE

DIODES INCORPORATED MAKES NO WARRANTY OF ANY KIND, EXPRESS OR IMPLIED, WITH REGARDS TO THIS DOCUMENT, INCLUDING, BUT NOT LIMITED TO, THE IMPLIED WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE (AND THEIR EQUIVALENTS UNDER THE LAWS OF ANY JURISDICTION).

Diodes Incorporated and its subsidiaries reserve the right to make modifications, enhancements, improvements, corrections or other changes without further notice to this document and any product described herein. Diodes Incorporated does not assume any liability arising out of the application or use of this document or any product described herein; neither does Diodes Incorporated convey any license under its patent or trademark rights, nor the rights of others. Any Customer or user of this document or products described herein in such applications shall assume all risks of such use and will agree to hold Diodes Incorporated and all the companies whose products are represented on Diodes Incorporated website, harmless against all damages.

Diodes Incorporated does not warrant or accept any liability whatsoever in respect of any products purchased through unauthorized sales channel. Should Customers purchase or use Diodes Incorporated products for any unintended or unauthorized application, Customers shall indemnify and hold Diodes Incorporated and its representatives harmless against all claims, damages, expenses, and attorney fees arising out of, directly or indirectly, any claim of personal injury or death associated with such unintended or unauthorized application.

Products described herein may be covered by one or more United States, international or foreign patents pending. Product names and markings noted herein may also be covered by one or more United States, international or foreign trademarks.

This document is written in English but may be translated into multiple languages for reference. Only the English version of this document is the final and determinative format released by Diodes Incorporated.

LIFE SUPPORT

Diodes Incorporated products are specifically not authorized for use as critical components in life support devices or systems without the express written approval of the Chief Executive Officer of Diodes Incorporated. As used herein:

A. Life support devices or systems are devices or systems which:

1. are intended to implant into the body, or
2. support or sustain life and whose failure to perform when properly used in accordance with instructions for use provided in the labeling can be reasonably expected to result in significant injury to the user.

B. A critical component is any component in a life support device or system whose failure to perform can be reasonably expected to cause the failure of the life support device or to affect its safety or effectiveness.

Customers represent that they have all necessary expertise in the safety and regulatory ramifications of their life support devices or systems, and acknowledge and agree that they are solely responsible for all legal, regulatory and safety-related requirements concerning their products and any use of Diodes Incorporated products in such safety-critical, life support devices or systems, notwithstanding any devices- or systems-related information or support that may be provided by Diodes Incorporated. Further, Customers must fully indemnify Diodes Incorporated and its representatives against any damages arising out of the use of Diodes Incorporated products in such safety-critical, life support devices or systems.

Copyright © 2018, Diodes Incorporated

www.diodes.com

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[Diodes Incorporated:](#)

[AH1803-SNG-7](#) [AH1803-WG-7](#)