

Single Port GigE Transformer

SMD Single Port Gigabit or Dual Port 10/100BASE-TX Isolation Modules




Part Number	Circuit	Package	Temp. Range	Return Loss (min)				OCL (min)	RoHS ¹
				1-40MHz	60MHz	80MHz	100MHz	(100KHz, 0.1Vrms, 8mA)	
TG1G-S031NYLF	A	NY	0 to 70°C	-18dB	-14dB	-12dB	-10dB	350µH	Pb-Free
TG1G-S031NYRL	A	NY	0 to 70°C	-18dB	-14dB	-12dB	-10dB	350µH	RoHS (7a)
TG1G-S031NYLF	A	NY	0 to 70°C	-18dB	-14dB	-12dB	-10dB	350µH	Pb-Free
TG1G-S031NYRL	A	NY	0 to 70°C	-18dB	-14dB	-12dB	-10dB	350µH	RoHS (7a)
TG1G-E001NYLF	A	NY	-40 to +85°C	-18dB	-14dB	-12dB	-10dB	350µH	Pb-Free
TG1G-E001NYRL	A	NY	-40 to +85°C	-18dB	-14dB	-12dB <td -10dB	350µH	RoHS (7a)	
TG1G-S032NYLF	B	NY	0 to 70°C	-18dB	-14dB	-12dB	-10dB	350µH	Pb-Free
TG1G-S032NYRL	B	NY	0 to 70°C	-18dB	-14dB	-12dB	-10dB	350µH	RoHS (7a)
TG111-E032NYLF	B	NY	-40 to +85°C	-18dB	-14dB	-12dB	-10dB	350µH	Pb-Free
TG111-E032NYRL	B	NY	-40 to +85°C	-18dB	-14dB	-12dB	-10dB	350µH	RoHS (7a)
TG1G-S035NYLF	C	NY	0 to 70°C	-18dB	-14dB	-12dB	-10dB	350µH	Pb-Free
TG1G-S035NYRL	C	NY	0 to 70°C	-18dB	-14dB	-12dB	-10dB	350µH	RoHS (7a)
TG1G-E035NYLF	C	NY	-40 to +85°C	-18dB	-14dB	-12dB	-10dB	350µH	Pb-Free
TG1G-E035NYRL	C	NY	-40 to +85°C	-18dB	-14dB	-12dB	-10dB	350µH	RoHS (7a)
TG111-E112NYLF	D	NY	-40 to +85°C	-18dB	-14dB	-12dB	-10dB	350µH	Pb-Free
TG111-E112NYRL	D	NY	-40 to +85°C	-18dB	-14dB	-12dB	-10dB	350µH	RoHS (7a)
TG111-S001J24RL	A	J24	0 to 70°C	-18dB	-14dB	-12dB	-10dB	350µH	RoHS (7a)
TG111-E001J24RL	A	J24	-40 to +85°C	-18dB	-14dB	-12dB	-10dB	350µH	RoHS (7a)


Notes:

1. Pb-Free parts are RoHS 6/6 compliant. RoHS (7a) parts contain lead per exemption 7a which is set to expire in July 2016.
2. Parts with RL suffix are not recommended for new designs.
3. For the smallest single port Gigabit transformer or dual port 10/100BASE-TX contact the factory about the proprietary *GEmini™* series.
4. Please contact the factory or representative for individual datasheets or additional information.


Circuit A

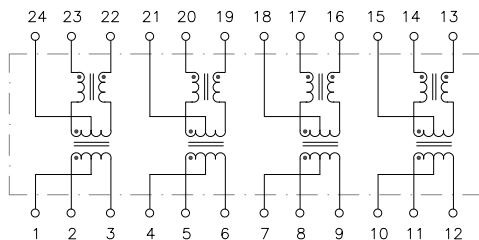


Circuit B

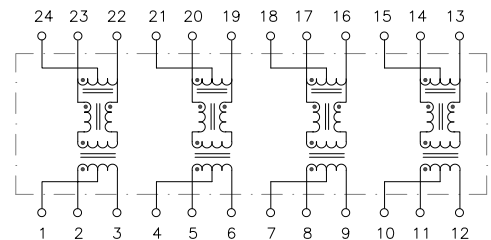

Circuit C

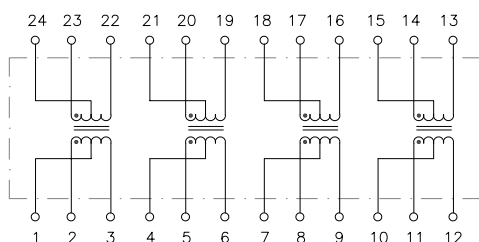


Circuit D

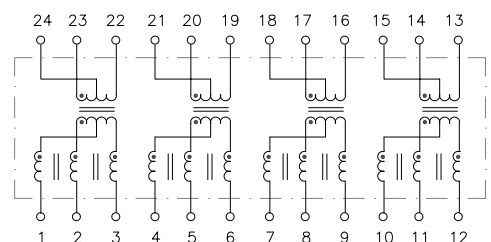

For additional information contact your [local representative](#), or HALO's support staff at (650) 903-3800 or info@haloelectronics.com


HALO Gigabit Family of Ethernet Transformers

NZ Package

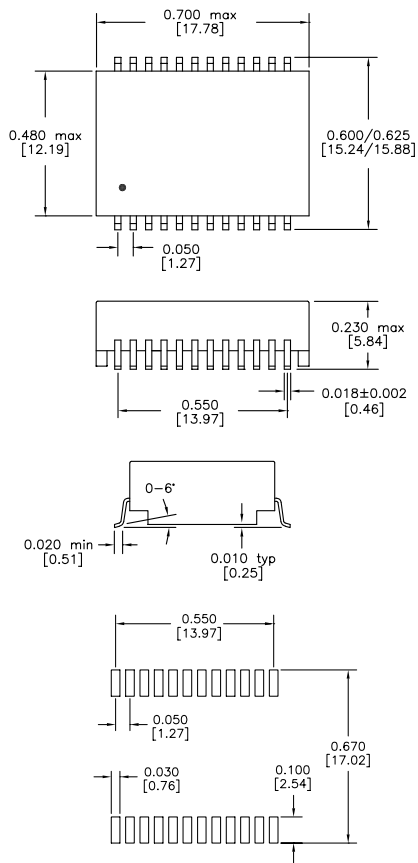


Recommended Solder Pad Layout
 Dimensions: inch [mm]
 Co-Planarity: 0.004 [0.10]

NY Package

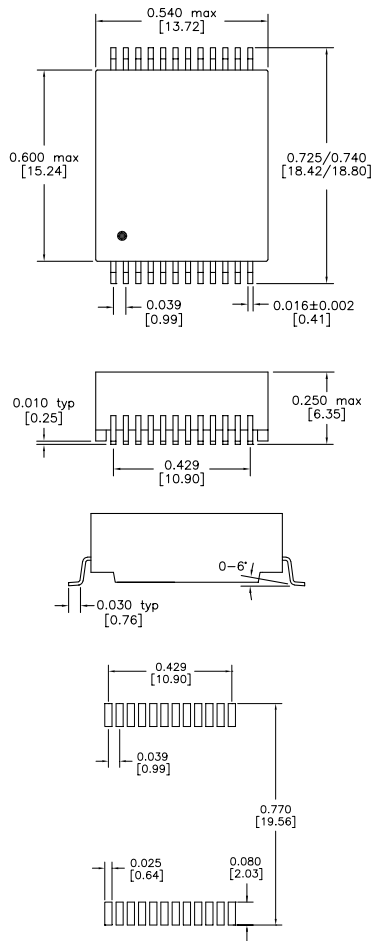

Recommended Solder Pad Layout

J24 Package

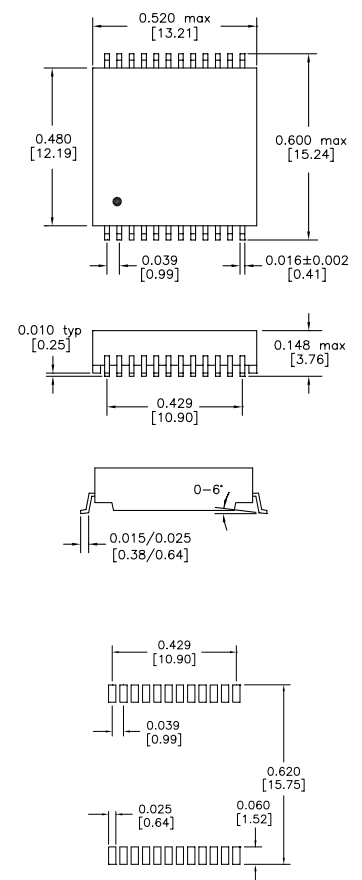

Recommended Solder Pad Layout



2880 Lakeside Drive #116
 Santa Clara, CA 95054
 (650) 903-3800
www.haloelectronics.com

HALO® Electronics is a leading supplier of high quality communication magnetics including signal transformers, filters, CMR chokes, PoE power transformers, DC/DC isolation modules, and integrated Ethernet connectors. HALO's high quality and competitively priced leading edge technology solutions are manufactured in ISO9001 and ISO14001 factories.

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

HALO Electronics:

[TG1G-S012NZRL](#) [TG1G-S001NZRL](#) [TG1G-S002NZRL](#) [TG1G-S032NYRL](#) [TG1G-S031NYRL](#) [TG1G-S001NZRLTR](#)
[TG1G-S002NZRLTR](#) [TG1G-S012NZRLTR](#) [TG1G-S031NYRLTR](#) [TG1G-S032NYRLTR](#) [TG1G-S032NYLF](#) [TG1G-](#)
[E001NZRL](#) [TG1G-E001NYRL](#) [TG1G-S035NYRL](#) [TG111-E001J24RL](#) [TG1G-S010NZRL](#) [TG111-E032NYRL](#) [TG1G-](#)
[E012NZRL](#) [TG1G-E035NYRL](#) [TG111-S001J24RL](#) [TG1G-E010NZRL](#) [TG1G-E001NYLF](#) [TG1G-S002NZLF](#) [TG1G-](#)
[S002NZLFTR](#)